

www.eskavalve.com

ESKA

GENERAL
CATALOGUE



ESKA VALVE is gas equipment producer (Gas Pressure Regulators, Gas Filters and Valves) in Turkey since 1968. Our certified products are being used in civic and industrial areas all around the world.

For 50 years, our product portfolio, operations and ESKA VALVE family has grown and still keep growing. Ingenuity, reliability and hard work led us to be the market leader in Turkey and expanded our international operations in more than 30 countries in global scale. By the time you read this text , probably we will be reaching out another locations and placing our products into grids.

By examining, following and applying 133 national and international standards from our R&D Department library, and with our Quality Department's deep commitment to test each and every product on over 100 inspection-test points have made us to produce annually more than 1.000.000 accurate and reliable unit products which 52 gas distribution companies trust worldwide .

Hope to gain your trust and see you in our ever-growing family.





**ERG-H7
SERIES**
Page 05 - 09



**ERG-H6
SERIES**
Page 10 - 14



**ERG-H5
SERIES**
Page 15 - 19



**ERG-H1
SERIES**
Page 20 - 24



**ERG-SX
SERIES**
Page 26 - 29



**ERG-S
SERIES**
Page 30 - 34



**ERG-SE
SERIES**
Page 35 - 49



**ERG-SR
SERIES**
Page 40 - 44



**ERG
SERIES**
Page 46 - 50



**ERG-E
SERIES**
Page 51 - 55



**ERG-H
SERIES**
Page 56 - 59



**ERG-EH
SERIES**
Page 60 - 63



**EGF
SERIES**
Page 65 - 69



**EGF-H
SERIES**
Page 70 - 72



**EMV
SERIES**
Page 74 - 78



**EGV
SERIES**
Page 80 - 84



**EAC
SERIES**
Page 85 - 86



**CABINET
SOLUTIONS**
Page 87 - 92



DIRECT ACTING
GAS PRESSURE REGULATOR

ESKA

www.eskavalve.com



ERG-H7
SERIES


ERG-H7 Series pressure regulator is used on gas line to reduce inlet pressure to desired outlet pressure.

It is mainly used in Distribution of Natural Gas and also suitable to use with non-corrosive gases. ERG-H7 is a single stage direct acting regulator with a optional security systems such as relief valve UPSO and OPSO

FEATURES


- For medium and high pressure domestic or industrial second group gas lines.
- Max inlet pressure 0,2 to 16 bar.
- Max outlet pressure 20-4000 mbar.
- Outlet pressure tolerance is $\pm 5-10$ (AC5 & AC10)
- Lock up pressure tolerance is max $+10$ (SG30 and SG20 is possible also)
- Can be integrated with UPSO & OPSO
- Temperature class as a standard -20 to +60 Celcius Degree. Low temperature series has ability to work under as low as -40 Celcius Degree.
- Flow direction inline type.

CONFIGURATIONS

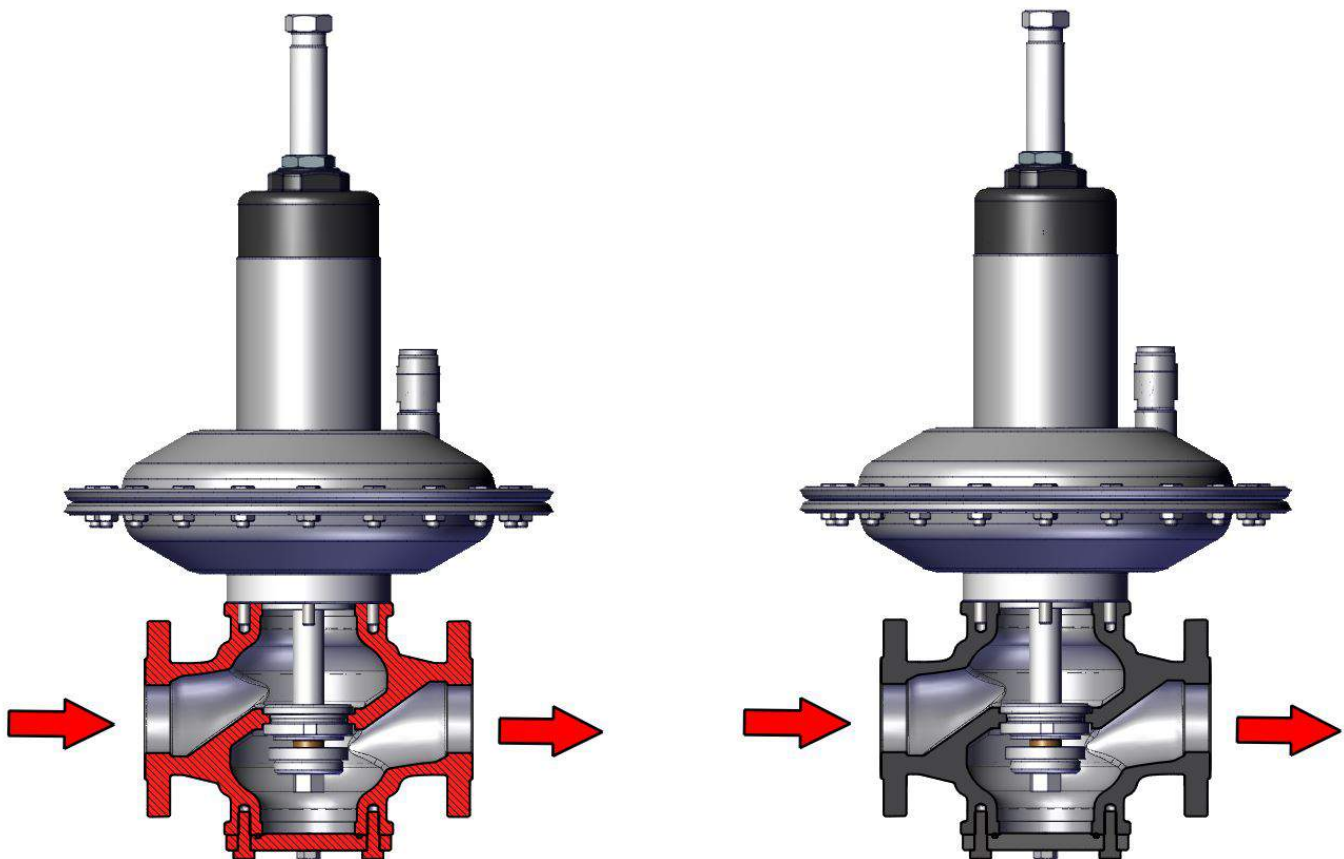

INLINE TYPE

DIMENSIONS

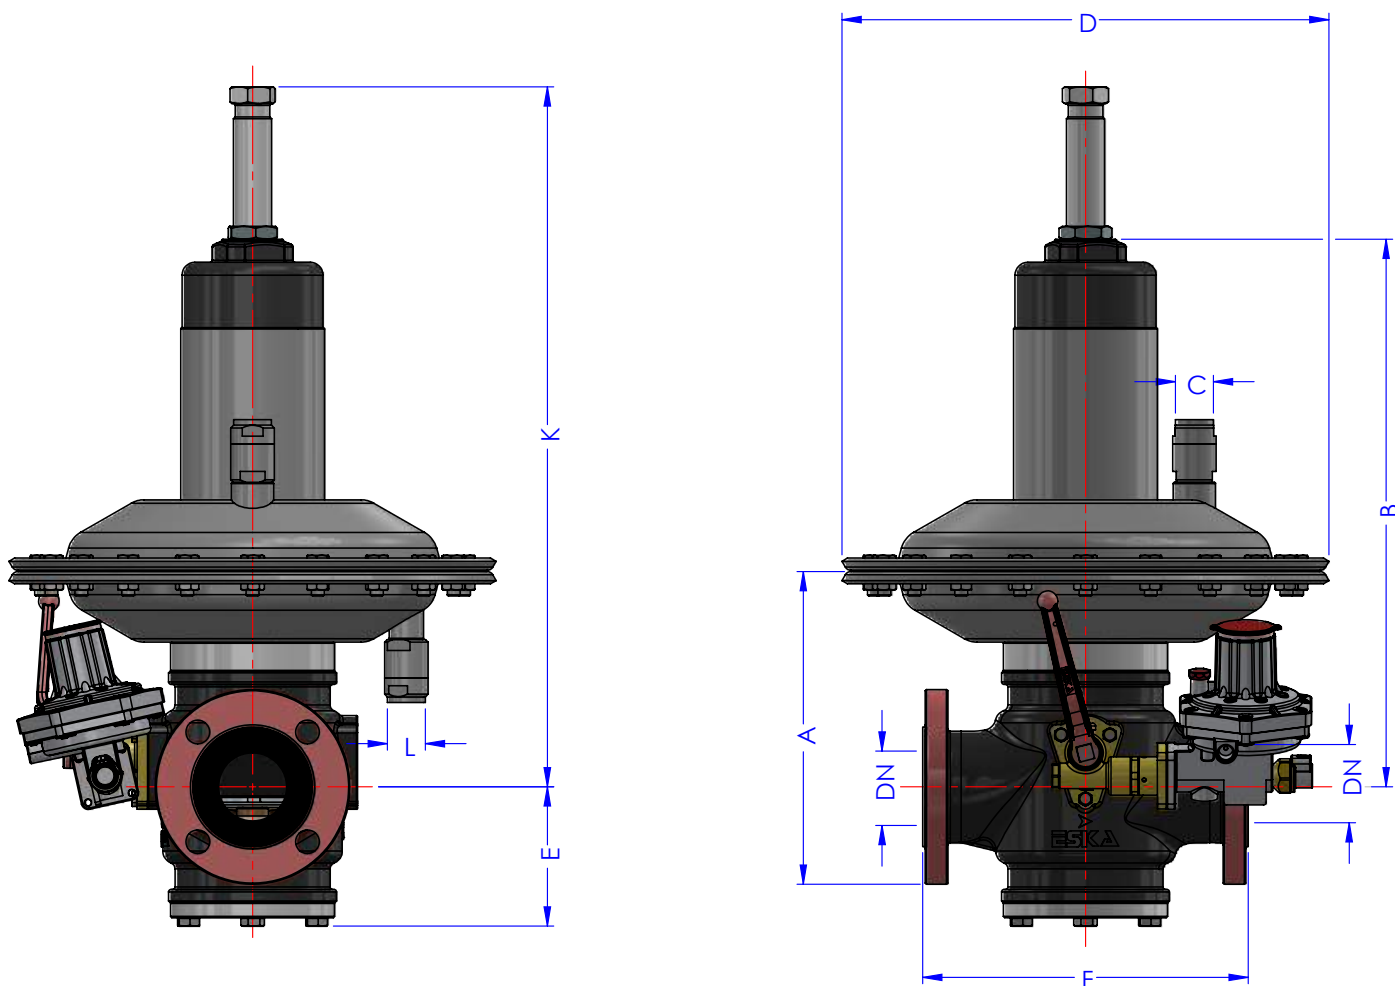

TYPE	DN	A	B	C	D	E	F	K (Max)	K (Min)	L
ERG-H7 LP	50	244	428	G 1/2"	380	109	254	559	451	G 1/2"
ERG-H7 HP	50	244	428	G 1/2"	380	109	254	567	459	G 1/2"
ERG-H7 LP	80	289	421	G 1/2"	380	132	298	583	475	G 1/2"
ERG-H7 HP	80	289	421	G 1/2"	380	132	298	592	484	G 1/2"


OPSO - UPSO

SAFETY AND ACCESSORIES

Over Pressure Shut-Off System


OPSO system is very useful during major breakdown situations and keeps the customer side safe. System works as a security valve and activates itself when the outlet pressure passes OPSO calibration point. OPSO system cuts the gas off, and manual reset is needed to activate the regulator again.

System has an independent shut-off mechanism and orifice and it monitors outlet pressure changes continuously, so activation time is below 2 seconds.

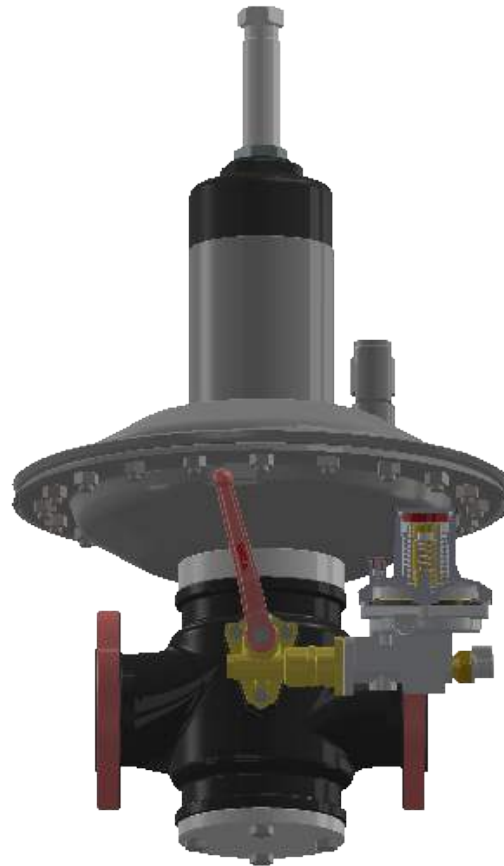

Under Pressure Shut-Off System.

- UPSO system on ERG-H7 series regulator is pressure based. It cuts the gas off when the outlet pressure drops below the UPSO calibration point.
- UPSO valve continuously monitors outlet pressure changes. Scenarios like, pipeline breakdown on outlet sides, or consumption is exceeding the total capacity of regulator or lack of inlet pressure situations etc...the outlet pressure drops and the regulator cuts the gas off once UPSO system is activated.

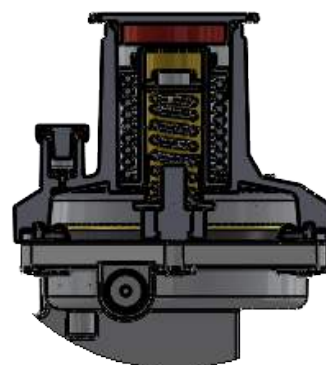

SPECIFICATIONS

Medium : Natural Gas, LPG and Non-Corrosive Gases
 Operating temperature : -20... + 60°C (optional : -40... +60°C)
 Maximum inlet pressure : 16 bar
 Outlet pressure range : 20 mbar to 4 bar
 Fail Mode : Fail to Open
 DN : 2" (50) - 3" (80)

DESIGN

The ERG-H7 Series pressure regulator body consists of :

- Valve housing
- Set up tool
- Breather consol.
- Over pressure shut off OPSO
- Under pressure shut off UPSO
- Furthermore the truly "top entry design" allows an easy periodical maintenance without removing body from the line.
- High flow rate coefficient
- High accuracy, even at maximum flow rates
- Reduced response times,
- Periodical maintenance without disassembling the body from the pipework,

MATERIALS

- Body is ductile cast iron
- Rubber components have gas approval according to EN 549
- Head covers is die cast aluminium EN AC-AISI 12

H7 DN 50												
Inlet Pressure	Outlet Pressure											
	0,02	0,05	0,08	0,1	0,3	0,5	0,75	1	1,5	2	3	4
0,2	520	480	430	410								
0,3	650	630	580	580								
0,5	880	860	830	830	580							
0,75	930	1080	1080	1030	880	680						
1	980	1280	1280	1280	1180	1030	730					
1,5	1130	1680	1680	1680	1630	1530	1430	1130				
2	1180	1860	1980	1830	1980	1980	1880	1680	1380			
4	1180	1950	2480	1830	3180	3280	3380	3380	3380	3180	2380	
6	1300	1980	2480	1730	3380	4280	4780	4680	4680	4780	4480	3680
8	1460	2030	2480	1760	3580	4280	4980	5980	6080	6180	6080	5780
10	1580	2180	2780	1760	3680	4280	4980	5980	6980	7480	7480	7480
12	1730	2330	2930	1910	3830	4430	5130	6130	7130	7630	7630	7630
19	2250	2730	2980	2330	3680	4280	4980	5980	6980	8480	10480	12000

H7 DN 80												
Inlet Pressure	Outlet Pressure											
	0,02	0,05	0,08	0,1	0,3	0,5	0,75	1	1,5	2	3	4
0,2	1360	1220	1160	1100								
0,3	1750	1650	1550	1450								
0,5	2250	2200	2200	2100	1550							
0,75	2550	2850	2750	2750	2430	1800						
1	2950	3320	3050	3050	3050	2750	1950					
1,5	3750	4300	3950	3950	4050	4000	3500	2950				
2	5050	5050	5100	4650	5150	5050	4550	4360	3650			
4	5000	6050	5550	5450	7450	8750	7550	8000	8250	8000	6100	
6	5030	6550	5700	5600	8200	11000	10000	10500	12000	12000	10000	9500
8	3000	6500	6000	5100	9400	11000	11000	13000	14000	15000	15000	14500
10	3000	6500	6100	5300	9400	11000	12000	15200	16000	19000	18000	19000
12	3000	6500	6250	5550	9500	11700	13000	15200	16000	19000	20000	20000
19	3100	6600	6350	5650	9600	11800	13100	15300	16100	20000	22000	22000

ESKA

www.eskavalve.com



ERG-H6
SERIES

ERG-H6 Series pressure regulator is used on gas line to reduce inlet pressure to desired outlet pressure.


It is mainly used in Distribution of Natural Gas and also suitable to use with non-corrosive gases. ERG-H6 is a single stage direct acting regulator with a optional security systems such as relief valve UPSO and OPSO

Monitor version is also available.



FEATURES

- For medium and high pressure domestic or industrial second group gas lines.
- Max inlet pressure 0,3 to 20 bar.
- Max outlet pressure 15-4000 mbar.
- Outlet pressure tolerance is $\pm 5-10$ (AC5 & AC10)
- Lock up pressure tolerance is max $+10$ (SG30 and SG20 is possible also)
- Can be integrated with Relief valve & UPSO & OPSO
- Temperature class as a standard -20 to +60 Celcius Degree. Low temperature series has ability to work under as low as -40 Celcius Degree.
- Flow direction inline type.

CONFIGURATIONS

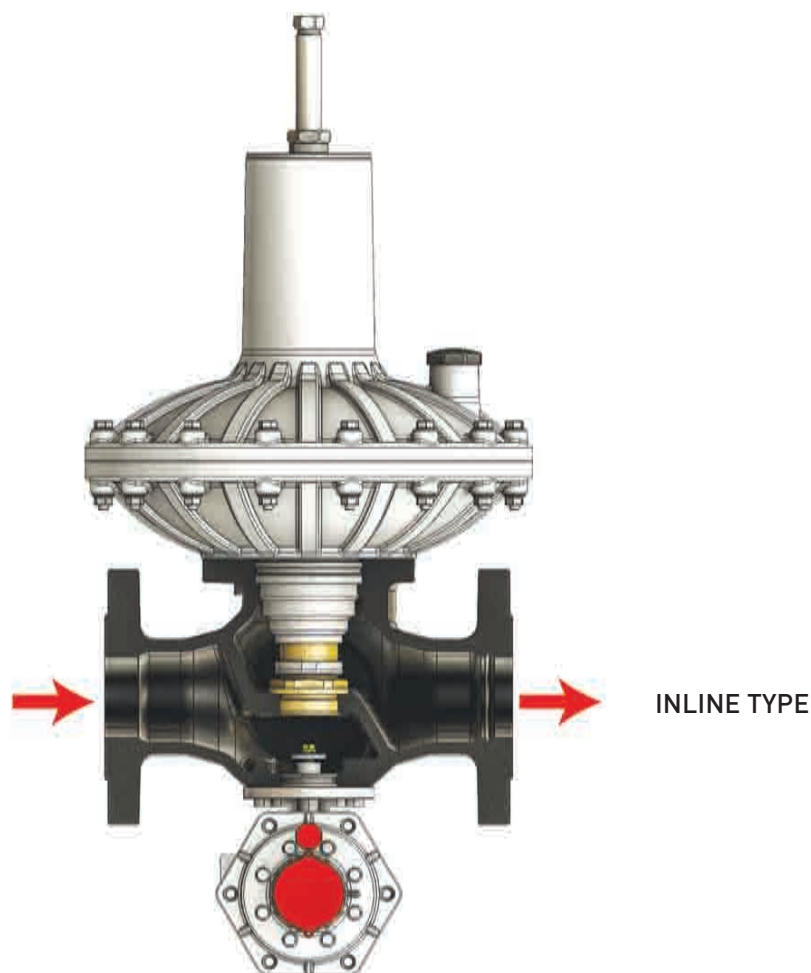

DIMENSIONS

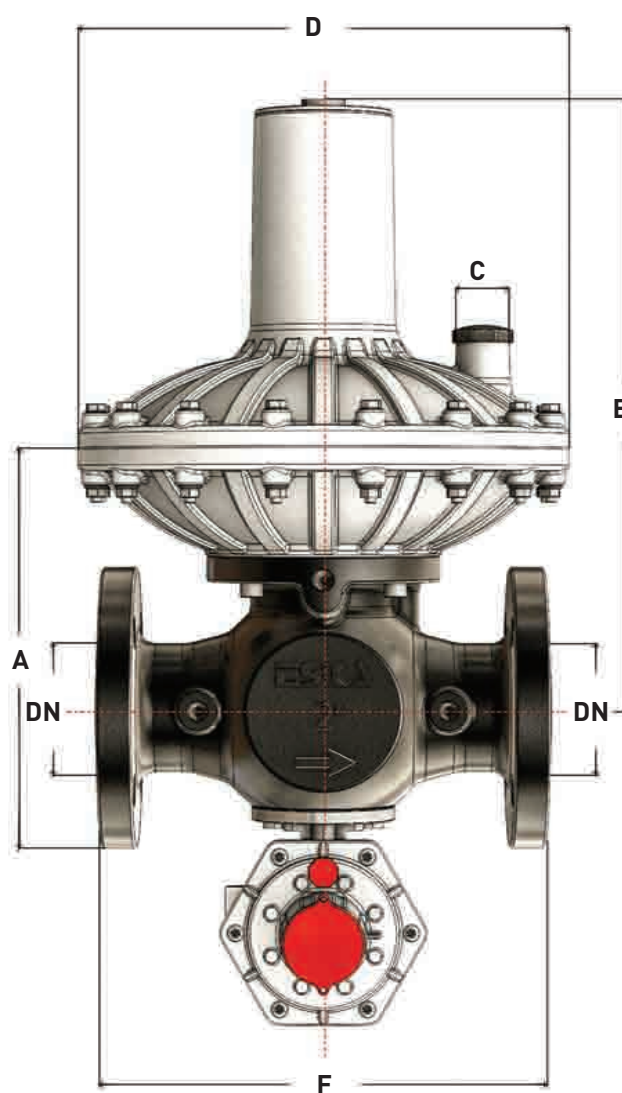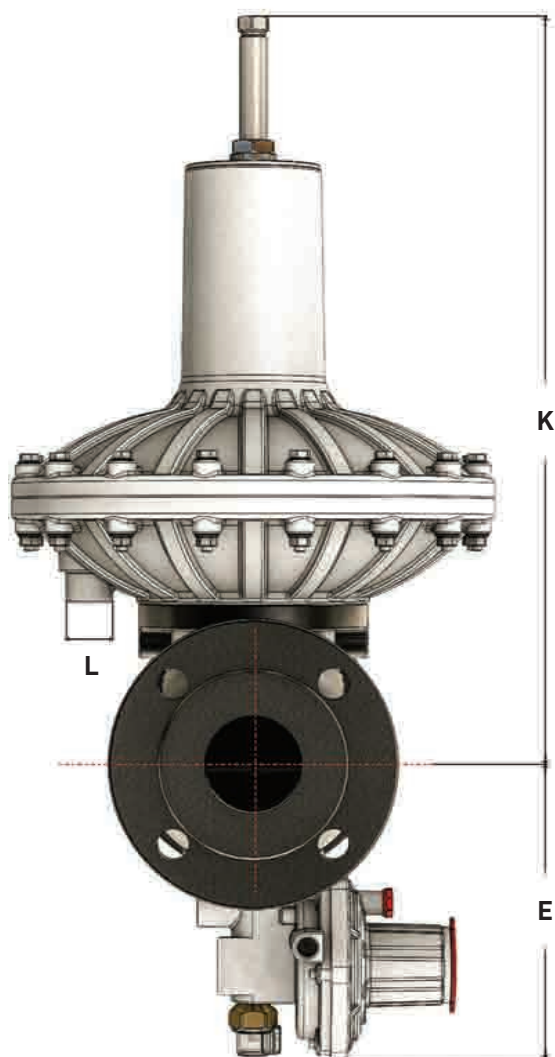

DN	A	B	C	D	E	F	K	L
50	227	345	G 1/2"	280	175	255	430	G 1/2"


SAFETY AND ACCESSORIES

Relief System

Regulator can be produced with a relief valve. Relief valve monitors outlet pressure continuously and when it detects pressure level higher than regulator's nominal outlet pressure, it activates and discharges gas to the atmosphere.

Relief valve has limited discharge capacity. Usually calibration point is lower than OPSO system. Under certain conditions such as gas expansion during hot weather seasons, Relief Valve is activated before OPSO closes the gas lines. It prevents random shut-off regarding pressure increase on outlet side.


Relief valve can be recalibrated by using proper tools.

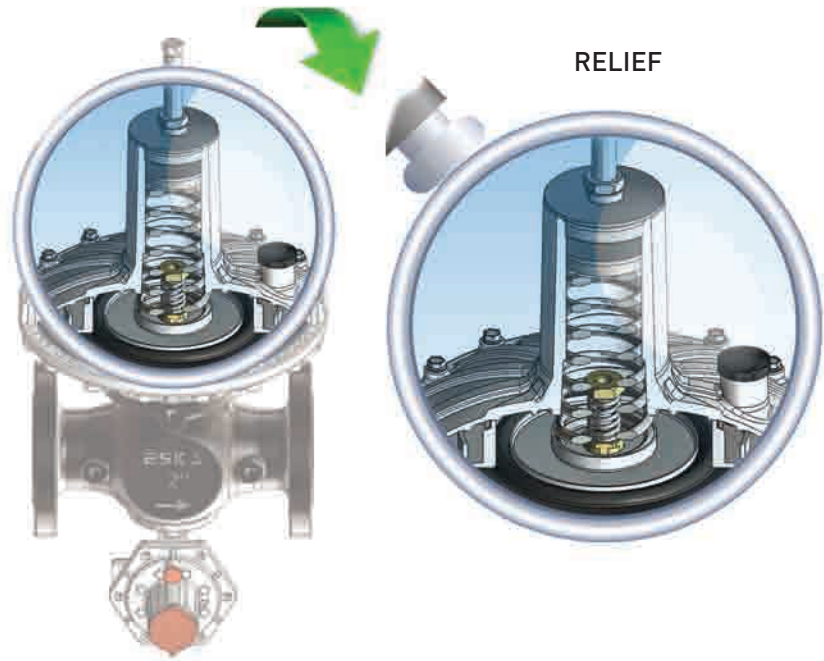

Over Pressure Shut-Off System

OPSO system is very useful during major breakdown situations and keeps the customer side safe. System works as a security valve and activates itself when the outlet pressure passes OPSO calibration point. OPSO system cuts the gas off, and manual reset is needed to activate the regulator again.

System has an independent shut-off mechanism and orifice and it monitors outlet pressure changes continuously, so activation time is below 2 seconds.

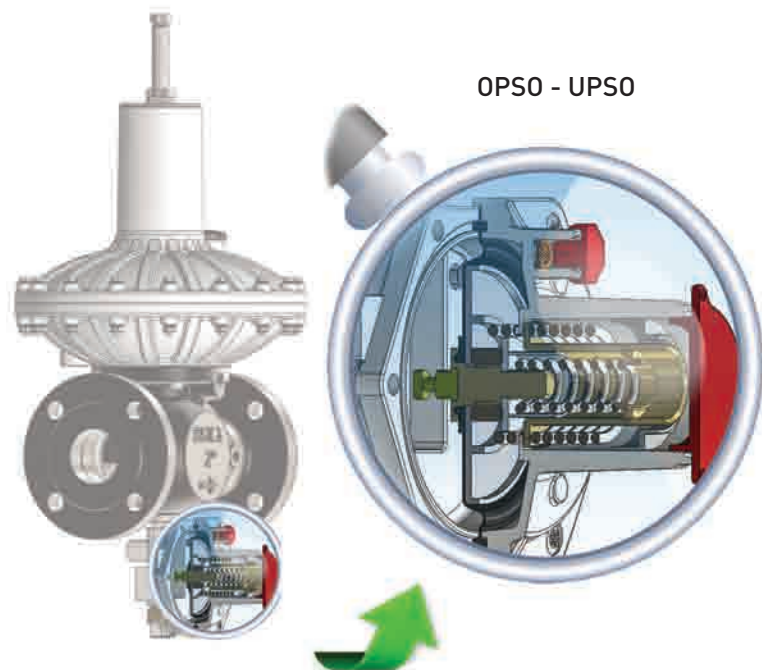

Under Pressure Shut-Off System.

- UPSO system on ERG-H6 series regulator is pressure based. It cuts the gas off when the outlet pressure drops below the UPSO calibration point.
- UPSO valve continuously monitors outlet pressure changes. Scenarios like, pipeline breakdown on outlet sides, or consumption is exceeding the total capacity of regulator or lack of inlet pressure situations etc...the outlet pressure drops and the regulator cuts the gas off once UPSO system is activated.

SPECIFICATIONS

Medium	: Natural Gas, LPG and Non-Corrosive Gases
Operating temperature	: -20... + 60°C (optional : -40... +60°C)
Assembly	: Vertical and Horizontal Position
Maximum inlet pressure	: 20 bar
Outlet pressure range	: 21 mbar to 4 bar
Conforming	: 2014/68/EU
Type	: IS
Fail Mode	: Fail to Open
DN	: 1" (25) - 1 1/2" (40) - 2" (50)

DESIGN

The ERG-H6 Series pressure regulator body consists of :

- Valve housing
- Set up tool
- Breather consol.
- Over pressure shut off OPSO
- Under pressure shut off UPSO
- Furthermore the truly "top entry design" allows an easy periodical maintenance without removing body from the line.
- High flow rate coefficient
- High accuracy, even at maximum flow rates
- Reduced response times,
- Periodical maintenance without disassembling the body from the pipework,

MATERIALS

- Body is ductile cast iron
- Rubber components have gas approval according to EN 549
- Orifice is Brass
- Head covers is die cast aluminium EN AC-AISI 12

CAPACITIES

	LP Version			MP Version		
Normal Diameter	25	40	50	25	40	50
CG Flow Coefficient	275	665	792	326	704	781
KG Flow Coefficient	290	695	833	343	739	820
K1 Body Shape Factor	98	98	91	101	98	100

Sizing of regulators is usually made on the basis of Cg valve and KG flow rate coefficients. Flow rates at the fully open position and the various operating

Q = flow rate in Scm/h

Pe = Absolute Upstream Pressure in bar

Pa = Absolute Downstream Pressure in bar

When the Cg and KG values of the regulator are known, as well as Pe and Pa, the flow rate can be calculated as follows:

1- in non-critical conditions: (Pe ≥ 2 x Pa)

$$Q = 0,52 \times C_g \times \sqrt{Pe \times \left(1 - \frac{Pa}{Pe}\right)} \quad Q = KG \times \sqrt{Pa \times (Pe - Pa)}$$


2- in critical conditions: (Pe < 2 x Pa)

$$Q = \frac{KG}{2} \times \sqrt{Pe}$$

$$Q = 0,52 \times C_g \times \sqrt{Pe}$$

ESKA

www.eskavalve.com

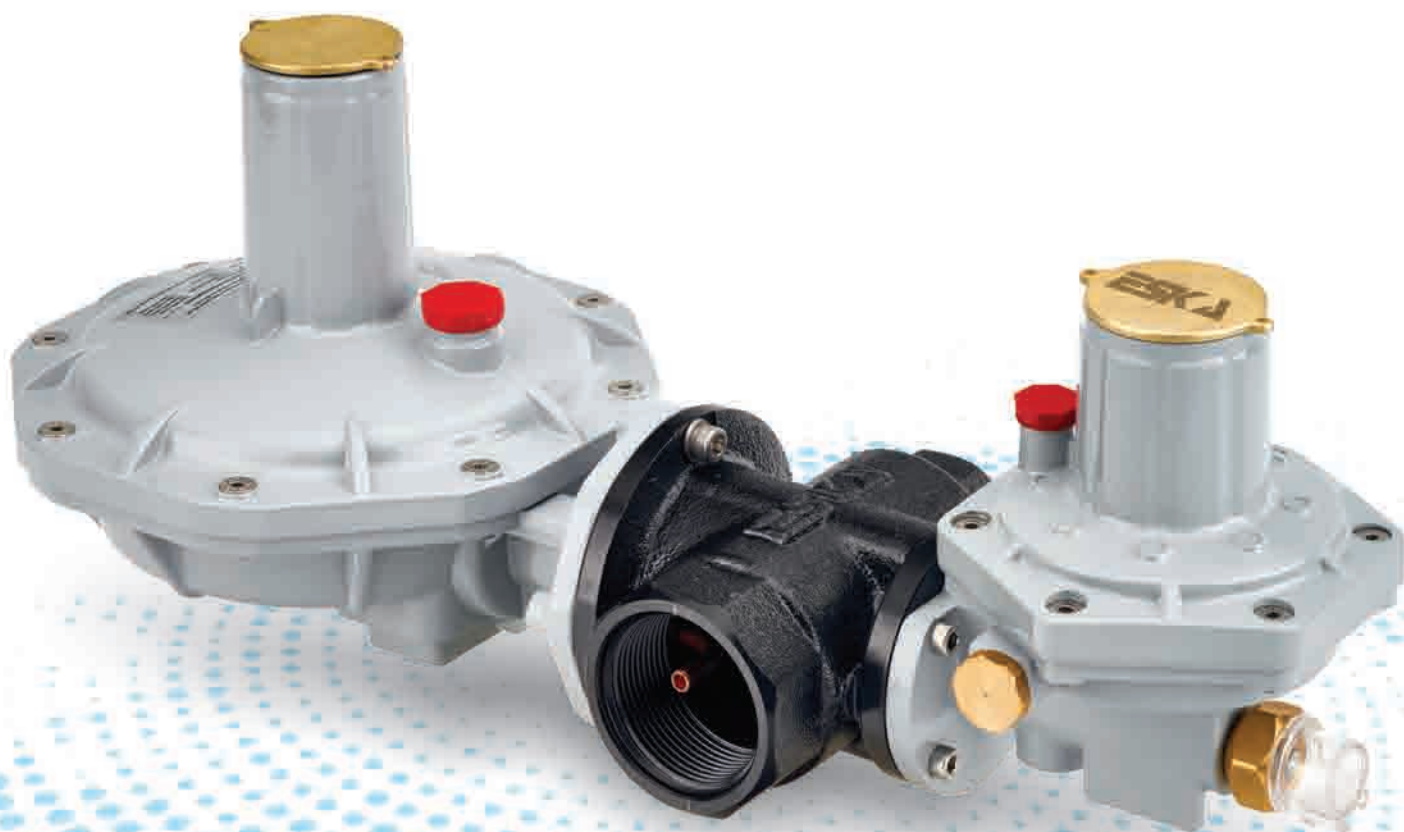

ERG-H5
SERIES

ERG-H5 Series pressure regulator which is used on gas line to reduce inlet pressure to desired outlet pressure.

ERG-H5 series pressure regulators are suitable for commercial usage like Gas Skids where the maximum inlet pressure up to 20 bar and outlet pressure up to 2,5 bar.


It is mainly used in Distribution of Natural Gas and also suitable to use with non-corrosive gases. ERG-H5 is a single stage direct acting regulator with a optional security systems such as relief valve UPSO and OPSO

FEATURES


- For medium and high pressure domestic or industrial second group gas lines.
- Max inlet pressure 1 to 20 bar.
- Max outlet pressure LPO : 15 to 100 mbar MPO : 100 to 300 mbar HPO : 300 to 2,5 bar
- Optional filter on inlet.
- Outlet pressure tolerance is $\pm 5-10$ (AC5 & AC10)
- Lock up pressure tolerance is max $+30$ (SG30, SG10 and SG20 is possible also)
- Can be integrated with Relief valve & UPSO & OPSO
- Temperature class as a standard -20 to +60 Centigrade Degree. Low temperature series has ability to work under as low as -40 Centigrade Degree.
- Flow direction inline

CONFIGURATIONS

INLINE TYPE

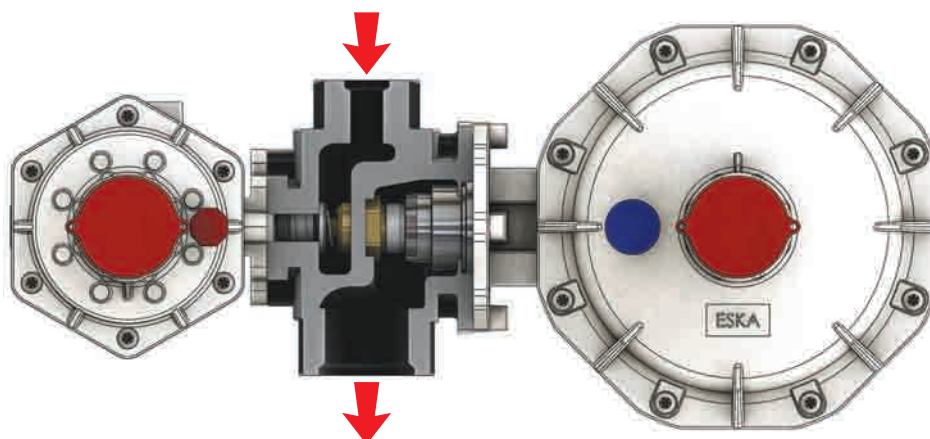


DIMENSIONS

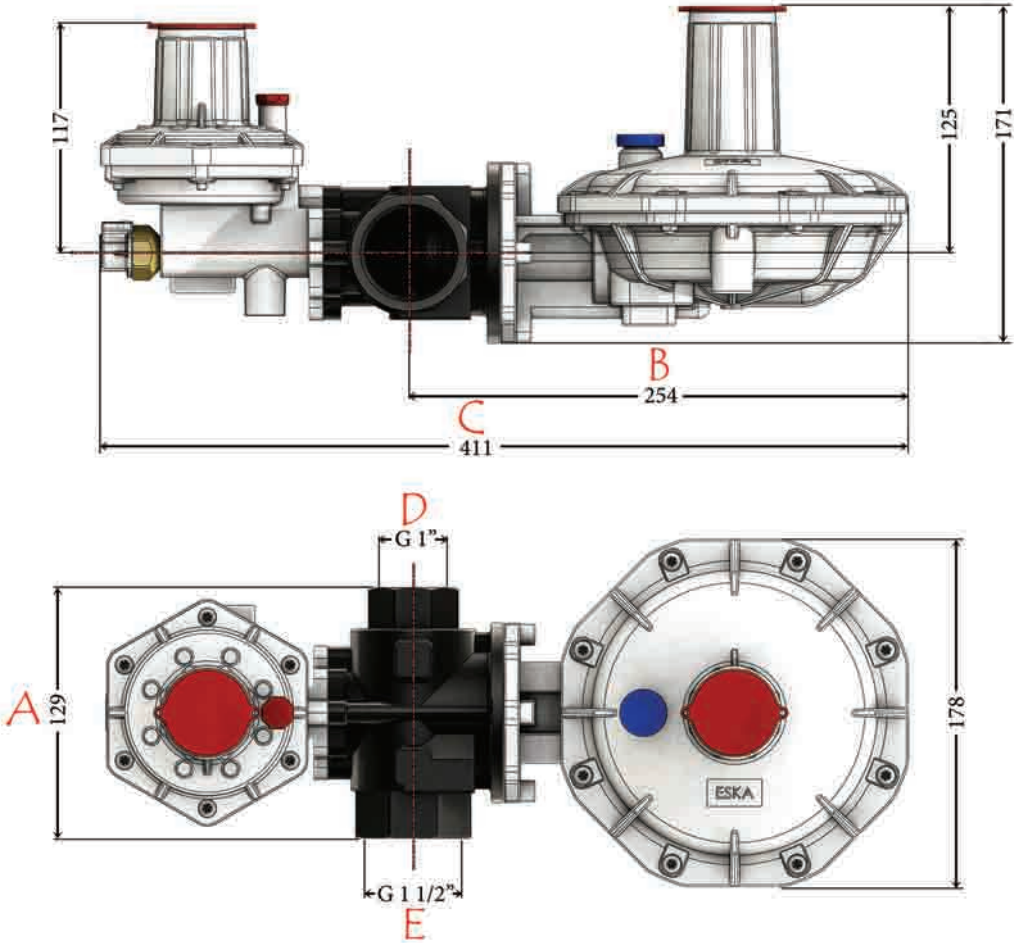

MODEL	A	B	C	D	E
ERG-H5 (1" - 1")	100	249	402	1"	1"

MODEL	A	B	C	D	E
ERG-H5 (1" - 1 1/2")	129	254	411	1"	1 1/2"

CONNECTION TYPES

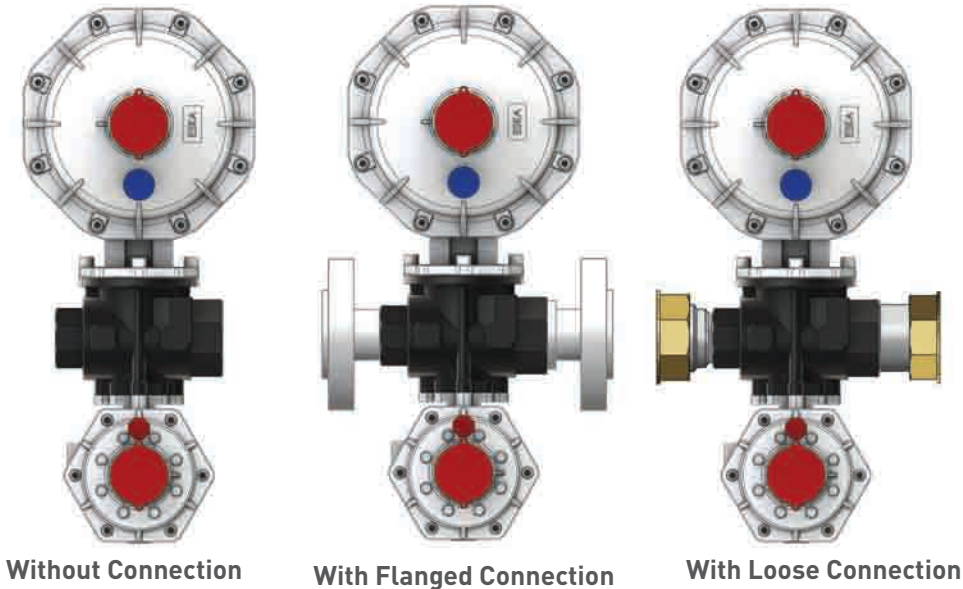

SAFETY AND ACCESSORIES


Relief System

Regulator can be produced with a relief valve. Relief valve monitors outlet pressure continuously and when it detects pressure level higher than regulator's nominal outlet pressure, it activates and discharges gas to the atmosphere.

Relief valve has limited discharge capacity. Usually calibration point is lower than OPSO system. Under certain conditions such as gas expansion during hot weather seasons, Relief Valve is activated before OPSO closes the gas lines. It prevents random shut-off regarding pressure increase on outlet side.

Relief valve can be recalibrated by using proper tools.

RELIEF

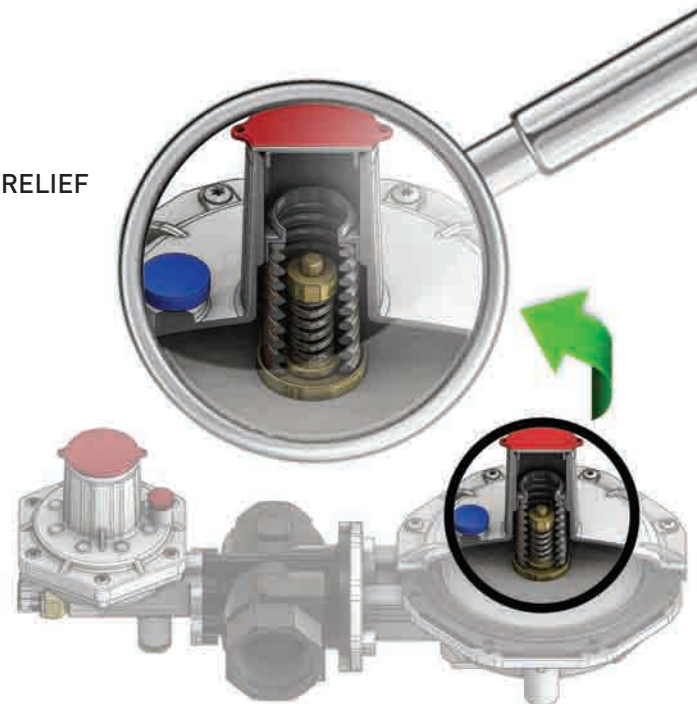


Over Pressure Shut-Off System

OPSO system is very useful during major breakdown situations and keeps the customer side safe. System works as a security valve and activates itself when the outlet pressure passes OPSO calibration point. OPSO system cuts the gas off, and manual reset is needed to activate the regulator again.

System has an independent shut-off mechanism and orifice and it monitors outlet pressure changes continuously, so activation time is below 2 seconds.

OPSO - UPSO

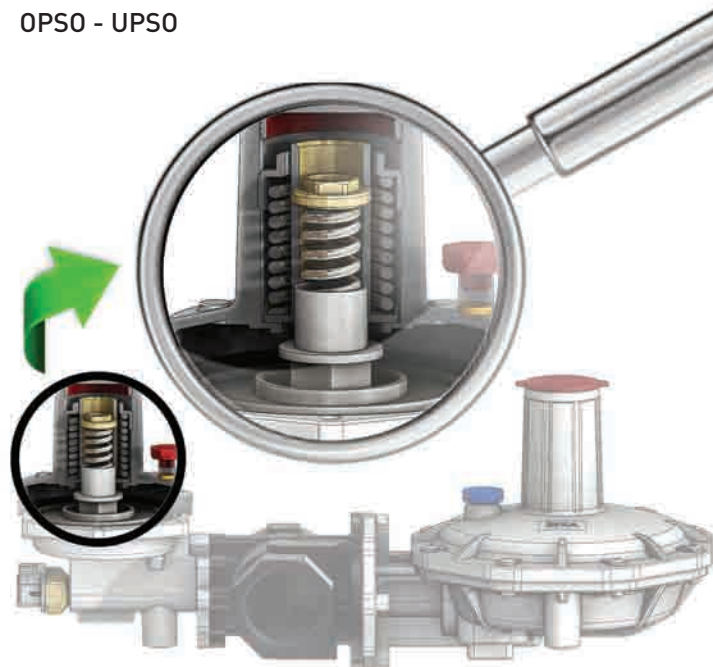

Under Pressure Shut-Off System.

- UPSO system on ERG-H5 series regulator is pressure based. It cuts the gas off when the outlet pressure drops below the UPSO calibration point.
- UPSO valve continuously monitors outlet pressure changes. Scenarios like, pipeline breakdown on outlet sides, or consumption is exceeding the total capacity of regulator or lack of inlet pressure situations etc...the outlet pressure drops and the regulator cuts the gas off once UPSO system is activated.

SPECIFICATIONS

Medium	: Natural Gas, LPG and Non-Corrosive Gases
Operating temperature	: -20... + 60°C (optional : -40... +60°C)
Assembly	: Vertical and Horizontal Position
Maximum inlet pressure	: 6 bar (Optional 10 bar, 20 bar)
Outlet pressure range	: 15 mbar to 2,5 bar
Conforming	: 2014/68/EU
Filter	: As a standard 100 micron pore diameter.

DESIGN

The ERG-H5 Series pressure regulator body consists of :

- Valve housing
- Internal thread
- Filter
- Set up tool
- Breather consol.
- Over pressure shut off OPSO
- Under pressure shut off UPSO
- Integrated bypass

MATERIALS

- Body Steel or Iron
- Rubber components have gas approval according to EN 549
- Brass materials are suitable according to EN12164 - EN12165 Standard.

MODELS / CAPACITIES

1"-1" WITH INTERNAL SENSING LINE ACTIVE

Outlet Pressure 15-100 mbar LP Version				Outlet Pressure 100-300 mbar MP Version			
Inlet Pressure	AC5	AC10	AC20	Inlet Pressure	AC5	AC10	AC20
Outlet Pressure+0,5bar	70	85	95	Outlet Pressure+0,5bar	100	120	130
Outlet Pressure+1bar	70	115	130	Outlet Pressure+1bar	140	170	190
Outlet Pressure+2,5bar	90	115	130	Outlet Pressure+2,5bar	230	280	280
Outlet Pressure+5bar	80	130	150	Outlet Pressure+5bar	280	280	280

1"-1" WITH INTERNAL AND EXTERNAL SENSING LINE ACTIVE

Outlet Pressure 15-100 mbar LP Version				Outlet Pressure 100-300 mbar MP Version			
Inlet Pressure	AC5	AC10	AC20	Inlet Pressure	AC5	AC10	AC20
Outlet Pressure+0,5bar	45	70	90	Outlet Pressure+0,5bar	90	130	140
Outlet Pressure+1bar	70	130	140	Outlet Pressure+1bar	130	190	220
Outlet Pressure+2,5bar	110	190	220	Outlet Pressure+2,5bar	180	280	280
Outlet Pressure+5bar	130	230	280	Outlet Pressure+5bar	330	330	330

1"-1 1/2" WITH INTERNAL SENSING LINE ACTIVE

Outlet Pressure 15-100 mbar LP Version				Outlet Pressure 100-300 mbar MP Version			
Inlet Pressure	AC5	AC10	AC20	Inlet Pressure	AC5	AC10	AC20
Outlet Pressure+0,5bar	70	90	100	Outlet Pressure+0,5bar	110	140	160
Outlet Pressure+1bar	150	170	190	Outlet Pressure+1bar	160	240	270
Outlet Pressure+2,5bar	130	190	190	Outlet Pressure+2,5bar	340	370	400
Outlet Pressure+5bar	120	150	170	Outlet Pressure+5bar	340	400	450

1"-1 1/2" WITH INTERNAL AND EXTERNAL SENSING LINE ACTIVE

Outlet Pressure 15-100 mbar LP Version				Outlet Pressure 100-300 mbar MP Version			
Inlet Pressure	AC5	AC10	AC20	Inlet Pressure	AC5	AC10	AC20
Outlet Pressure+0,5bar	65	100	105	Outlet Pressure+0,5bar	90	150	170
Outlet Pressure+1bar	150	160	170	Outlet Pressure+1bar	150	230	270
Outlet Pressure+2,5bar	280	330	330	Outlet Pressure+2,5bar	500	500	500
Outlet Pressure+5bar	190	235	280	Outlet Pressure+5bar	500	500	500

ESKA

www.eskavalve.com



ERG-H1 SERIES

ERG-H1 Series pressure regulator is used on gasline to reduce inlet pressure to desired outlet pressure.

ERG-H1 series pressure regulators are suitable for commercial usage like Gas Skids where the maximum inlet pressure up to 20 bar and outlet pressure up to 4bar.


It is mainly used in Distribution of Natural Gas and also suitable to use with non-corrosive gases. ERG-H1 is a single stage regulator with an optional security systems such as relief valve, UPSO and OPSO.

The regulators are manufactured according to **Ped Directive 2014/68/EU**. The performance of the regulators complies with **EN 334**

FEATURES


- For medium and high pressure domestic or industrial second group gas lines.
- Max inlet pressure 1 to 20 bar.
- Max outlet pressure MPO: 100 to 800 and HPO : 800 to 4 bar.
- Optional filter on inlet.
- Outlet pressure tolerance is $\pm 5-10$ (AC5&AC10)
- Lock up pressure tolerance is max $+30$ (SG30)
- Can be integrated with Relief valve & UPSO & OPSO
- Flow direction inline and angle type.

DIMENSIONS

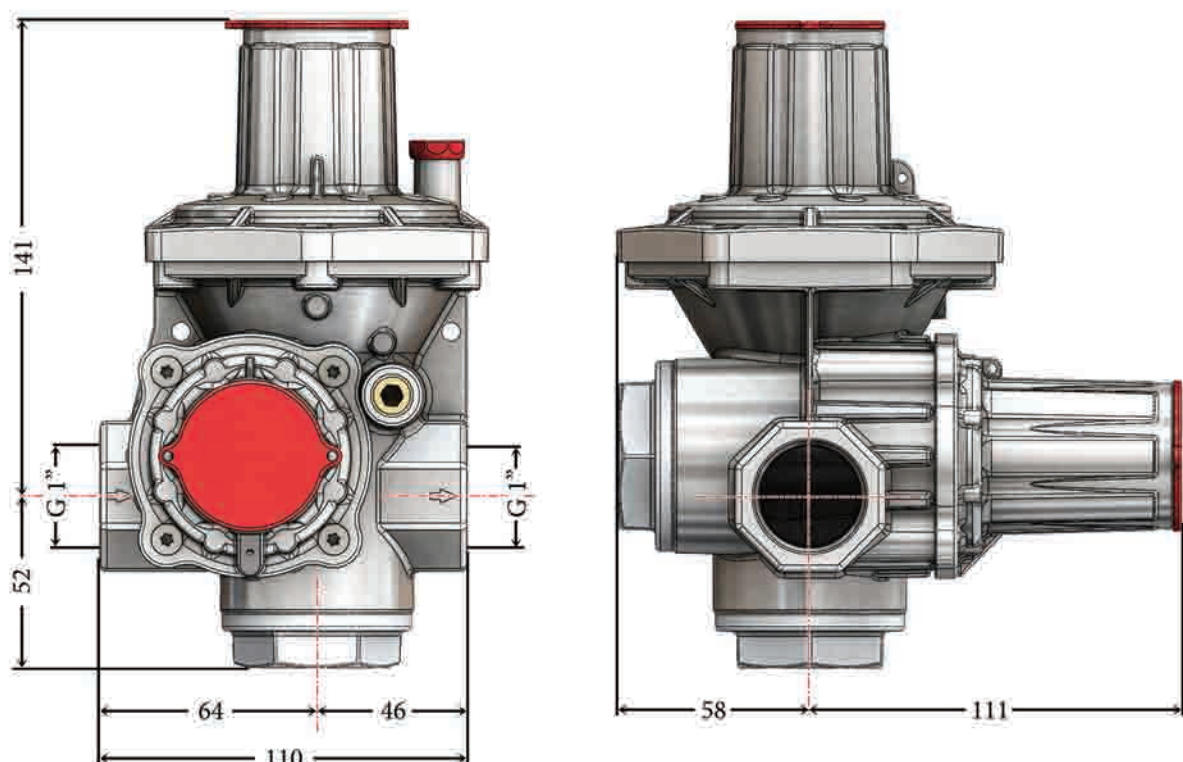


CONFIGURATIONS


INLINE TYPE

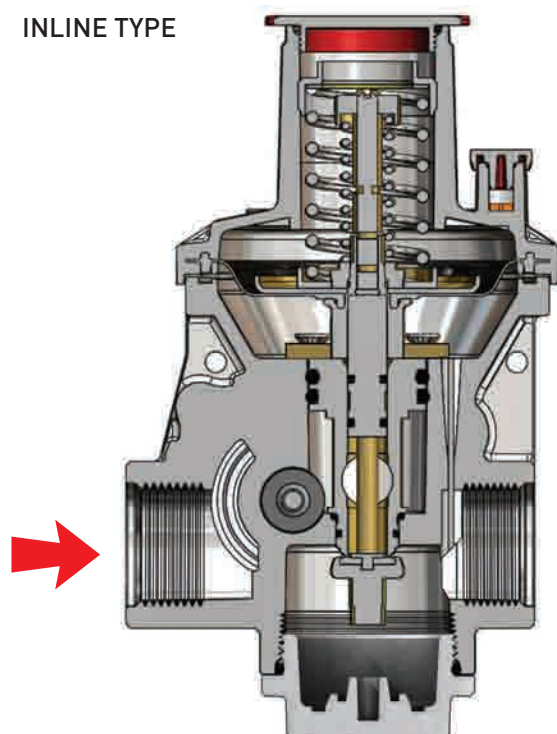


ANGLE TYPE

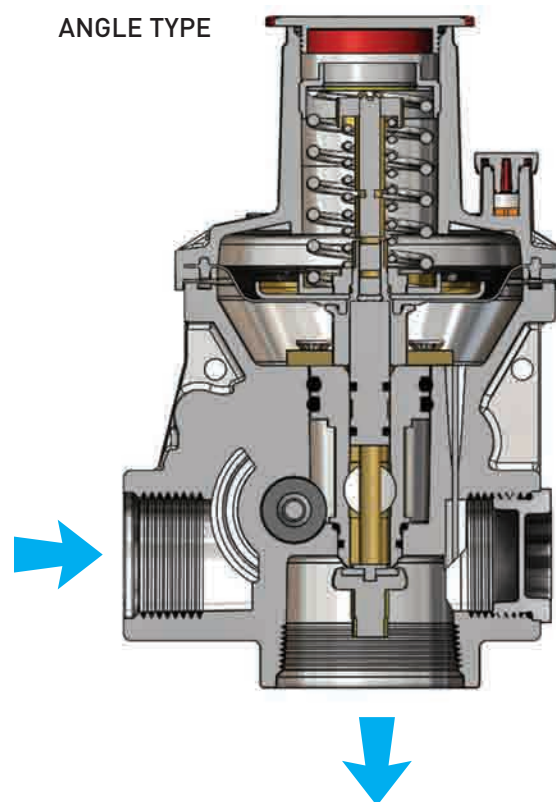


CONNECTION TYPES

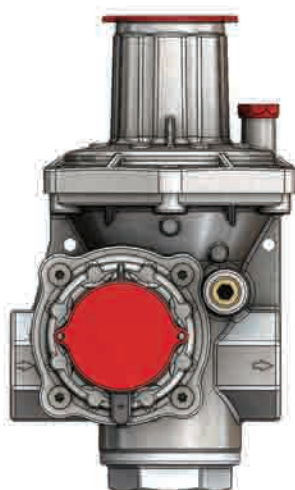

Without Connection

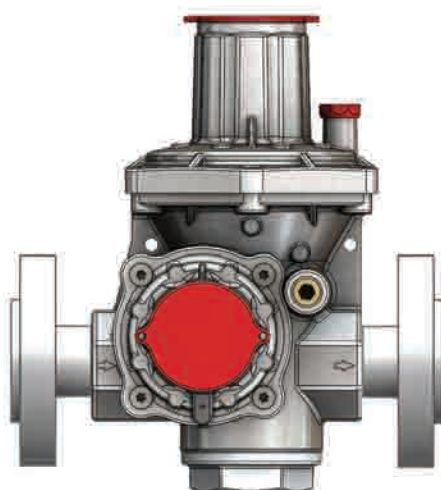

With Flanged Connection

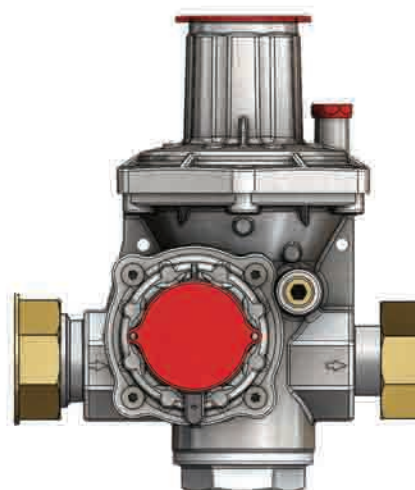

With Loose Connection


SAFETY AND ACCESSORIES

Relief System

Regulator can be produced with a relief valve. Relief valve monitors outlet pressure continuously and when it detects pressure level higher than regulator's nominal outlet pressure, it activates and discharges gas to the atmosphere.

Relief valve has limited discharge capacity. Usually calibration point is lower than OPSO system. Under certain conditions such as gas expansion during hot weather seasons, Relief Valve is activated before OPSO closes the gas lines. It prevents random shut-off regarding pressure increase on outlet side.


Relief valve can be recalibrated by using proper tools.

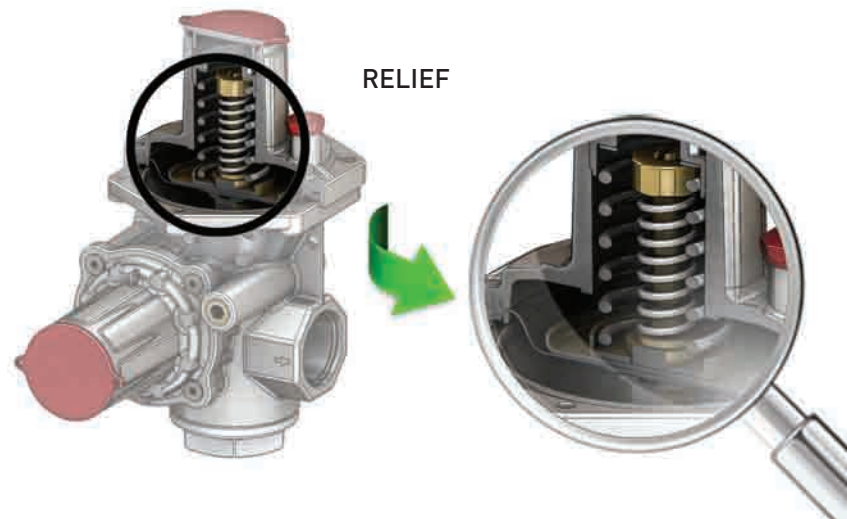

Over Pressure Shut-Off System

OPSO system is very useful during major breakdown situations and keeps the customer side safe. System works as a security valve and activates itself when the outlet pressure passes OPSO calibration point. OPSO system cuts the gas off, and manual reset is needed to activate the regulator again.

System has an independent shut-off mechanism and orifice and it monitors outlet pressure changes continuously, so activation time is below 2 seconds.

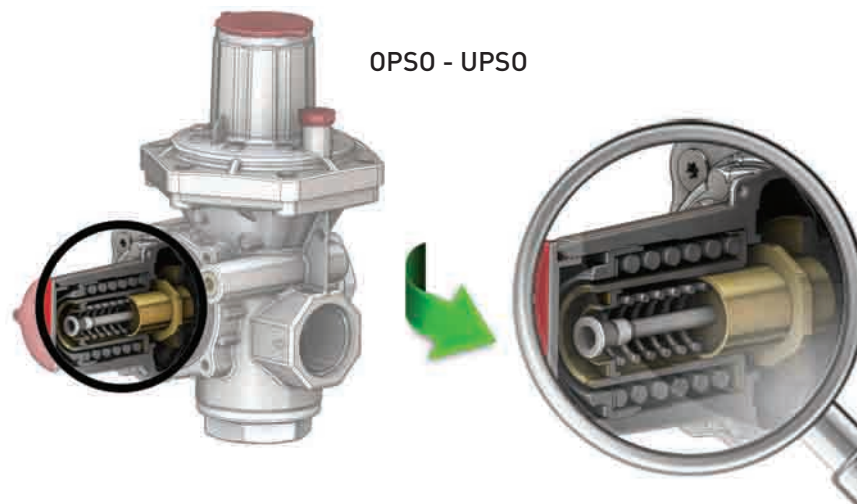

Under Pressure Shut-Off System.

- UPSO system on ERG-H1 series regulator is pressure based. It cuts the gas off when the outlet pressure drops below the UPSO calibration point.
- UPSO valve continuously monitors outlet pressure changes. Scenarios like, pipeline breakdown on outlet sides, or consumption is exceeding the total capacity of regulator or lack of inlet pressure situations etc...the outlet pressure drops and the regulator cuts the gas off once UPSO system is activated.

SPECIFICATIONS

Medium	: Natural Gas, LPG and Non-Corrosive Gases
Operating temperature	: -20... + 60°C (optional : -40... +60°C)
Assembly	: Vertical and Horizontal Position
Maximum inlet pressure	: 6 bar (Optional 10 bar, 20 bar)
Outlet pressure range	: 100 mbar to 4 bar.
Conforming	: 2014/68/EU
Filter	: As a standard 100 micron pore diameter.

DESIGN

The ERG-H1 Series pressure regulator body consists of :

- Valve housing
- Internal thread
- Filter
- Set up tool
- Breather consol.
- Optional pressure test point.
- Over pressure shut off OPSO
- Under pressure shut off UPSO
- Integrated bypass

MATERIALS

- Body Aluminum
- Rubber components have gas approval according to EN 549
- Brass materials are suitable according to EN12164 - EN12165 Standard.

CAPACITIES

Flow Rate SCMH Methane	Pin mbar
50	Pd + 0,3 bar
75	Pd + 0,5 bar
100	Pd + 1 bar
180	Pd + 2,5 bar
250	Pd + 3,5 bar

Pd = Outlet pressure



DOUBLE STAGE

GAS PRESSURE REGULATOR

ESKA

www.eskavalve.com



ERG-SX
SERIES

ERG-SX Series double stage pressure regulator is used on gas line to reduce inlet pressure to desired outlet pressure. It is suitable for both commercial and domestic usage where can be directly installed to gas meters with high operational reliability and accurate outlet pressure accuracy.

Simple installation procedure.

Due to different inlet and outlet connection range, ERG-SX Series can be used along with pipe diameter from DN15 to DN50 with different thread standards as well as BSP, BSPT, NPT, NPP.

The modular concept of ERG-SX and wide range availability of inlet and outlet connections allow to match particular customer requirements.

The regulators are manufactured according to **Ped Directive 2014/68/EU**. The functional tests are performed according to **EN334**.


FEATURES

- For medium pressure domestic or commercial second group gas lines.
- Optional metallic mesh filter for easy change and guarantees longer operation life of regulator.
- Outlet pressure tolerance is $\pm 10\%$ (AC10) up $\pm 5\%$ (AC5)
- Lock-up pressure tolerance is $\pm 20\%$ (SG20) up to 100 mbar outlet pressure, more than 100 mbar outlet pressure SG20 and SG10 possible.
- Up to 6 bar inlet pressure.
- 18 - 500 mbar outlet pressure range with interchangeable springs

Optional ;

- Incorporated Under Pressure Shut Off Valve.
- Internal Relief Valve

DIMENSIONS

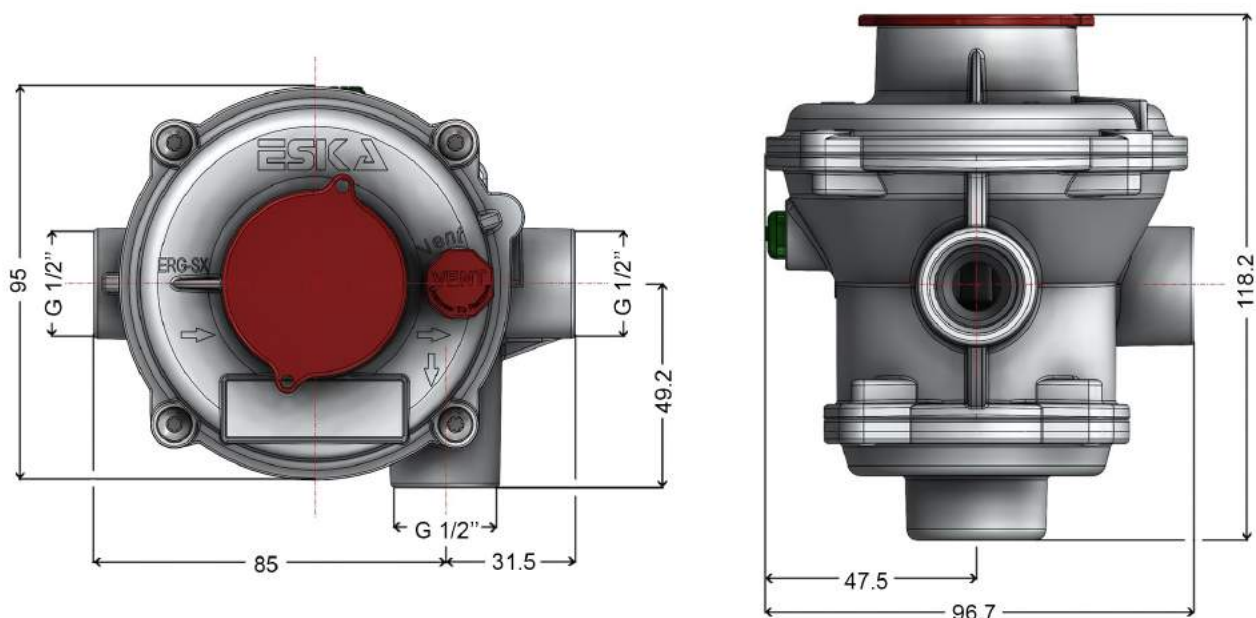


SAFETY AND ACCESSORIES

Relief System

Regulator can be produced with a relief valve. Relief valve monitors outlet pressure continuously and when it detects pressure level higher than regulator's nominal outlet pressure, it activates and discharges gas to the atmosphere.

Relief valve has limited discharge capacity. Usually calibration point is lower than OPSO system. Under certain conditions such as gas expansion during hot weather seasons, Relief Valve is activated before OPSO closes the gas lines. It prevents random shut-off regarding pressure increase on outlet side.

Relief valve can be recalibrated by using proper tools.

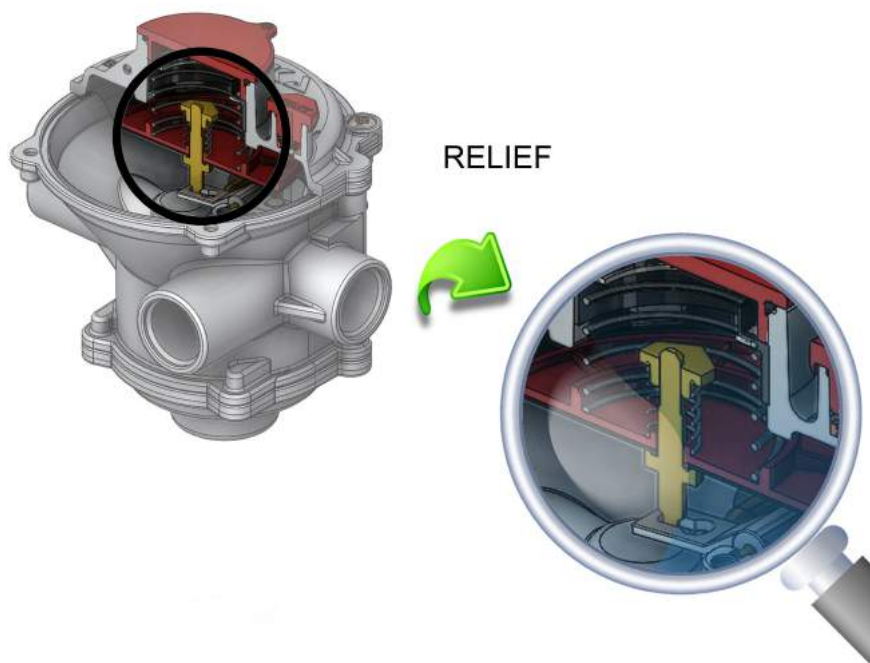


Under Pressure Shut-Off System.


UPSO system on ERG- SX series regulator acts under those circumstances;

- When there is no pressure inlet side.
- When the consumption exceed regulator's maximum capacity. [%101*Q to %150*Q]
- When the pressure drop outlet side due to consumption.

UPSO valve continuously monitors outlet pressure changes. Scenarios like, pipeline breakdown on outlet sides, or consumption is exceeding the total capacity of regulator or lack of inlet pressure situations etc...the outlet pressure drops and the regulator cuts the gas off once UPSO system is activated.

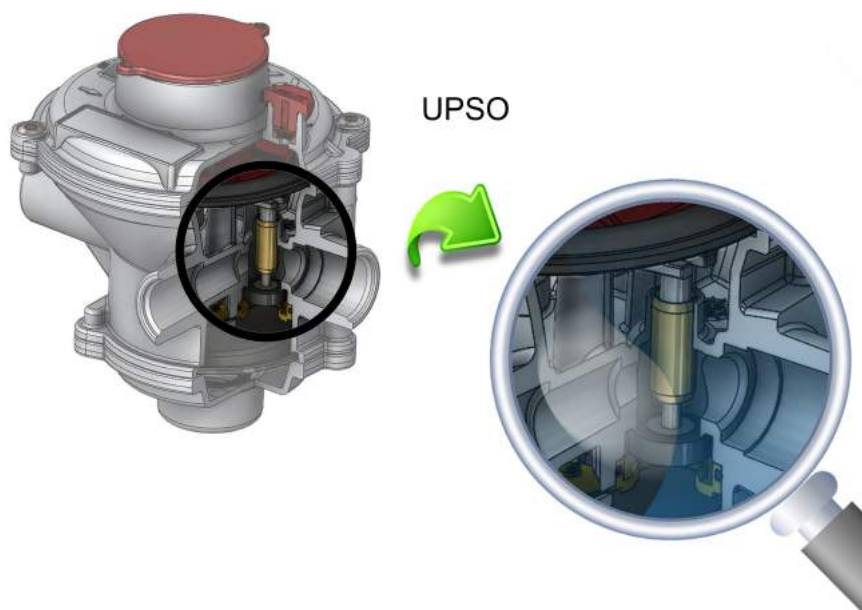

CONFIGURATIONS

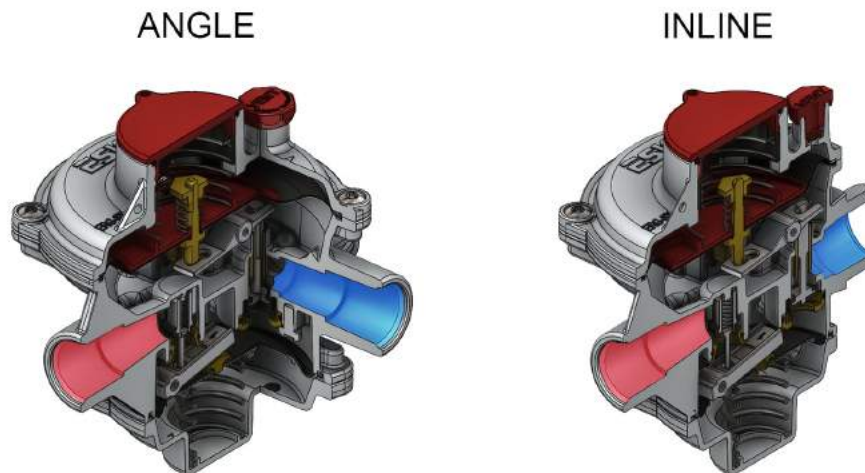

SPECIFICATIONS

Medium	: Natural Gas, LPG and Non-Corrosive Gases
Operating temperature	: -20... + 60°C (optional : -40... +60°C)
Assembly	: Vertical and Horizontal Position
Maximum inlet pressure	: 5 bar
Minimum inlet pressure	: Depending on customer request can start as low as 0,3 bar.
Outlet pressure range	: 12 to 35 mbar.
Filter	: Included

DESIGN

The ERG-SX Series pressure regulator body may consists of:

- Valve housing
- Connections
- Filter
- Ventilation console
- Outlet pressure test point
- Integrated security valves (UPS0 / Relief)

MATERIALS

- Body and covers Aluminum according to EN1706 standard.
- Rubber components are Nitril Rubber comply to EN 549.
- Brass materials are suitable according to EN12164 - EN12165 Standard.
- Filter material is metallic mesh filter.

MODELS

MODEL	FLOW RATE			UNIT WEIGHT (kgs)	BOX SIZE (LxWxH cm)	PACKAGING (pieces/ carton)	CARTON SIZE (LxWxH cm)	CARTON (weight)	TOTAL CARTON (weight)
	LPO 18-75 mbar	MPO 75-150 mbar	HPO 150-500 mbar						
ERG-SX 06	6			1,29	12,3x12,7x16,3	24	50x50x29	1.69kg	32.65 kg
ERG-SX 10	10			1,29	12,3x12,7x16,3	24	50x50x29	1.69kg	32.65 kg
ERG-SX 15	15			1,29	12,3x12,7x16,3	24	50x50x29	1.69kg	32.65 kg

ESKA

www.eskavalve.com



ERG-S
SERIES

ERG-S Series double stage pressure regulator is used on gas line to reduce inlet pressure to desired outlet pressure. It is suitable for both commercial and domestic usage where can be directly installed to gas meters with high operational reliability and accurate outlet pressure accuracy.

Simple installation procedure.

Due to different inlet and outlet connection range, ERG-S Series can be used along with pipe diameter from DN15 to DN50 with different thread standards as well as BSP, BSPT, NPT, NPP.

The modular concept of ERG-S and wide range availability of inlet and outlet connections allow to match particular customer requirements.

The regulators are manufactured according to **Ped Directive 2014/68/EU**. The functional tests are performed according to **EN334**.


FEATURES

- For medium pressure domestic or commercial second group gas lines.
- Optional metallic mesh filter for easy change and guarantees longer operation life of regulator.
- Outlet pressure tolerance is $\pm 10\%$ (AC10) up $\pm 5\%$ (AC5)
- Lock-up pressure tolerance is $\pm 20\%$ (SG20) up to 100 mbar outlet pressure, more than 100 mbar outlet pressure SG20 and SG10 possible.
- Up to 6 bar inlet pressure.
- 18 - 500 mbar outlet pressure range with interchangeable springs



Optional ;

- Incorporated Under Pressure Shut Off Valve.
- Internal Relief Valve

DIMENSIONS

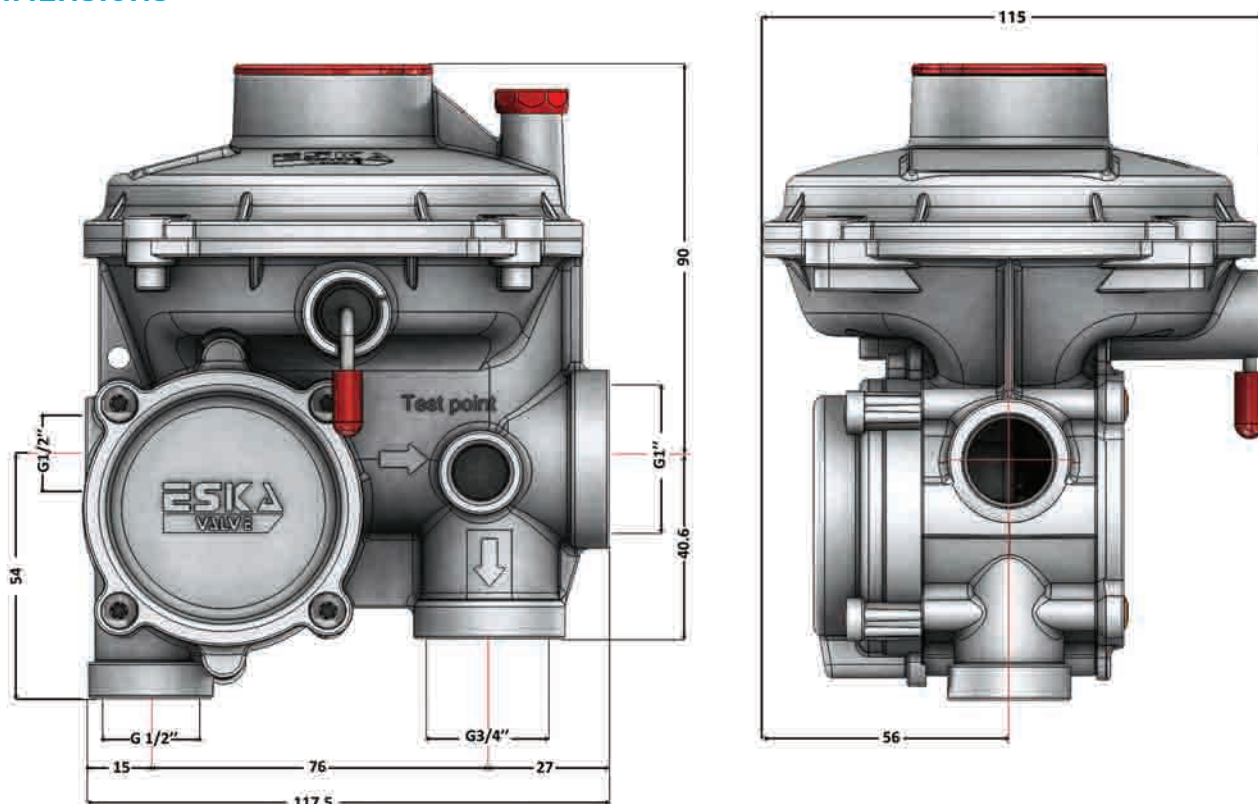

CONNECTION TYPES

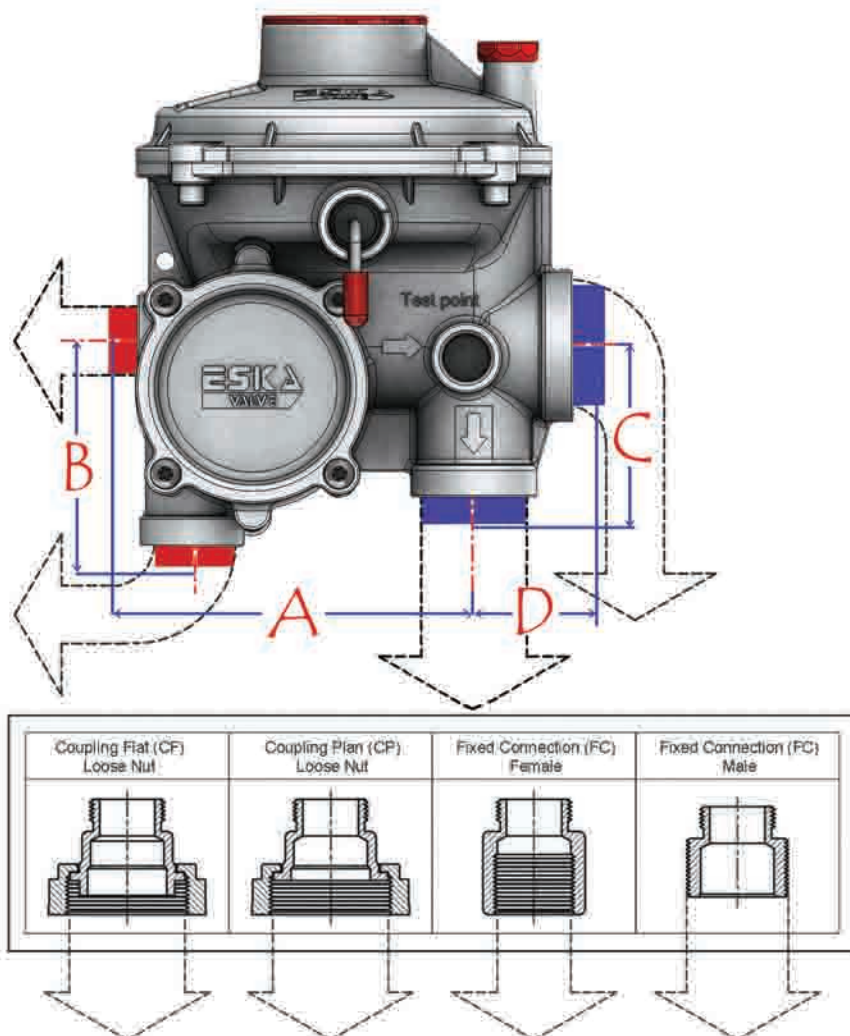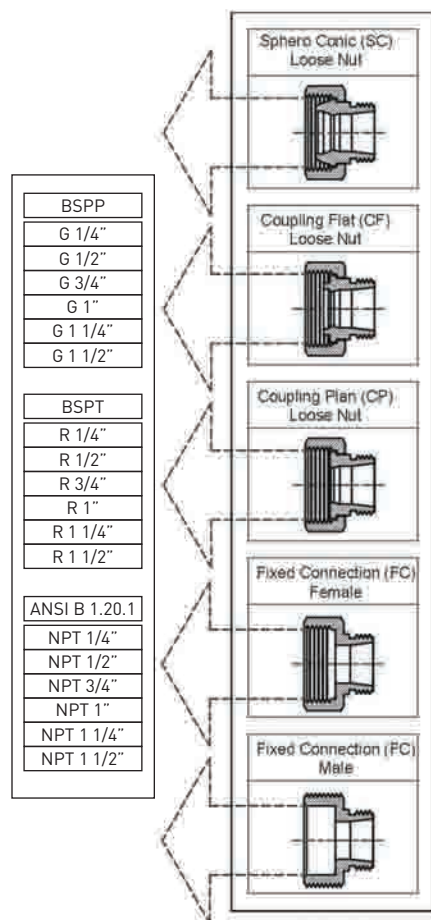

BSPP	BSPT	ANSI B 1.20.1
G 1/4"	R 1/4"	NPT 1/4"
G 1/2"	R 1/2"	NPT 1/2"
G 3/4"	R 3/4"	NPT 3/4"
G 1"	R 1"	NPT 1"
G 1 1/4"	R 1 1/4"	NPT 1 1/4"
G 1 1/2"	R 1 1/2"	NPT 1 1/2"

INLET	1/2" Tapa	1/2" CF	3/4" SC	3/4" CF	7/8"	1" FC (Female)	1" CF	1 1/4" CF
OUTLET	3/4" Tapa	1/2" CF	3/4" CF	7/8"	1" CF	1" FC (Female)	1 1/4" CF	1 1/4" CF
OUTLET	1" Tapa	1/2" CF	3/4" CF	7/8"	1" CF			


SAFETY AND ACCESSORIES

Relief System

Regulator can be produced with a relief valve. Relief valve monitors outlet pressure continuously and when it detects pressure level higher than regulator's nominal outlet pressure, it activates and discharges gas to the atmosphere.

Relief valve has limited discharge capacity. Usually calibration point is lower than OPSO system. Under certain conditions such as gas expansion during hot weather seasons, Relief Valve is activated before OPSO closes the gas lines. It prevents random shut-off regarding pressure increase on outlet side.

Relief valve can be recalibrated by using proper tools.

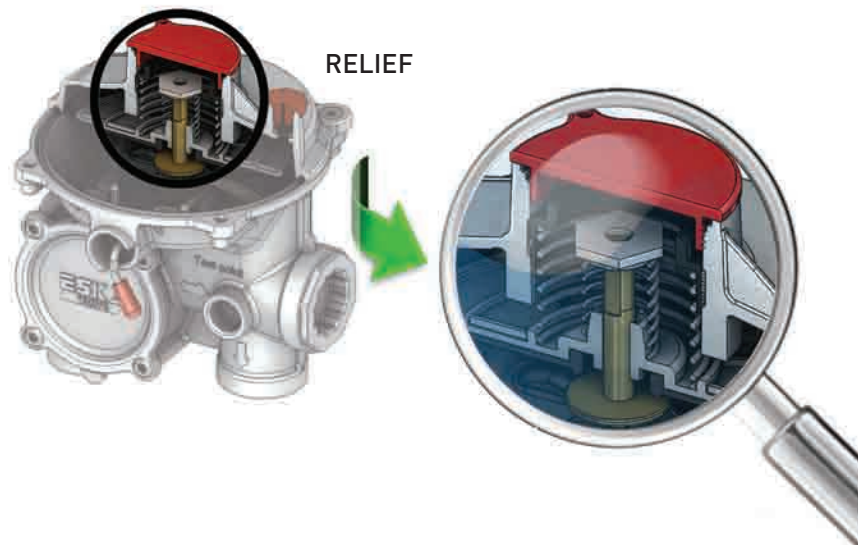


Under Pressure Shut-Off System.


UPSO system on ERG- S series regulator acts under those circumstances;

- When there is no pressure inlet side.
- When the consumption exceed regulator's maximum capacity. ($\%101 \cdot Q$ to $\%150 \cdot Q$)
- When the pressure drop outlet side due to consumption.

UPSO valve continuously monitors outlet pressure changes. Scenarios like, pipeline breakdown on outlet sides, or consumption is exceeding the total capacity of regulator or lack of inlet pressure situations etc...the outlet pressure drops and the regulator cuts the gas off once UPSO system is activated.

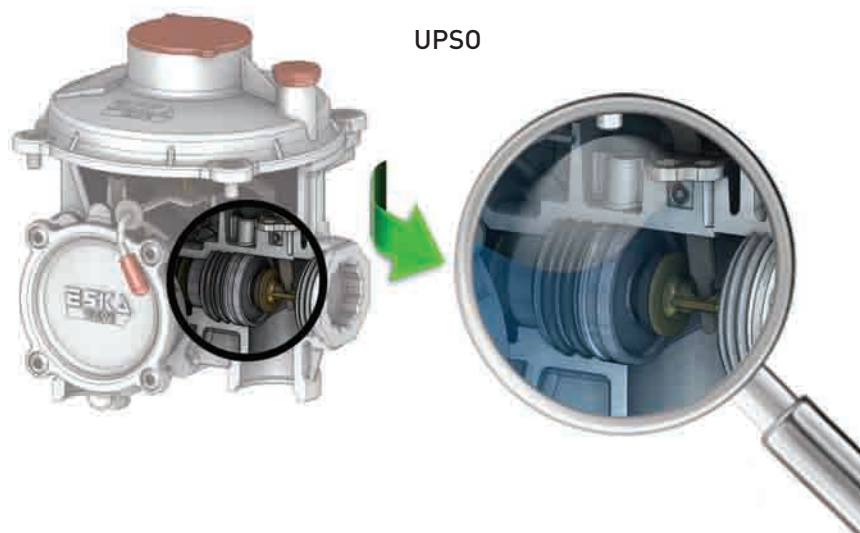

CONFIGURATIONS

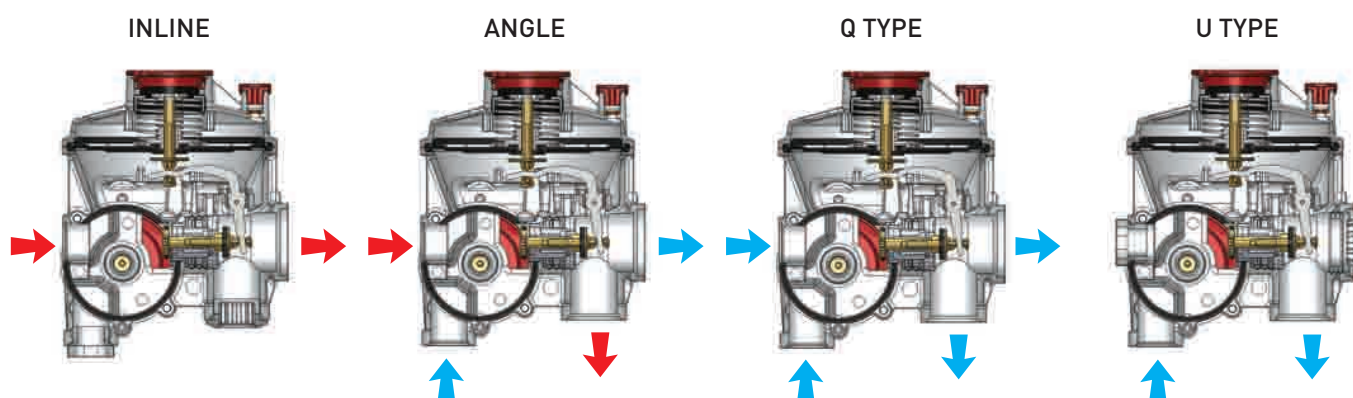

SPECIFICATIONS

Medium	: Natural Gas, LPG and Non-Corrosive Gases
Operating temperature	: -20... + 60°C (optional : -40... +60°C)
Assembly	: Vertical and Horizontal Position
Maximum inlet pressure	: 6 bar
Minimum inlet pressure	: Depending on customer request can start as low as 0,1 bar.
Outlet pressure range	: 18 to 500 mbar.
Filter	: Included

DESIGN

The ERG-S Series pressure regulator body may consists of:

- Valve housing
- Connections
- Filter
- Ventilation console
- Outlet pressure test point
- Integrated security valves (UPSO / Relief)

MATERIALS

- Body and covers Aluminum according to EN1706 standard.
- Rubber components are Nitril Rubber comply to EN 549.
- Brass materials are suitable according to EN12164 - EN12165 Standard.
- Filter material is metallic mesh filter.


MODELS

MODEL	FLOW RATE			UNIT WEIGHT (kgs)	BOX SIZE (LxWxH cm)	PACKAGING (pieces/ carton)	CARTON SIZE (LxWxH cm)	CARTON (weight)	TOTAL CARTON (weight)
	LPO 18-75 mbar	MPO 75-150 mbar	HPO 150-500 mbar						
ERG-S 06	6			1,10	15x14.5x16	16	33x58x35	0.65kg	18.2 kg
ERG-S 10	10			1,10	15x14.5x16	16	33x58x35	0.65kg	18.2 kg
ERG-S 25	25			1,10	15x14.5x16	16	33x58x35	0.65kg	18.2 kg
ERG-S 50	50			1,10	15x14.5x16	16	33x58x35	0.65kg	18.2 kg

BESIDE STANDARD FLOW RATES ABOVE, 1,6 / 2,5 / 15 / 30 / 40 / 60 / 65 SCMH ARE AVAILABLE UPON REQUEST.

ESKA

www.eskavalve.com

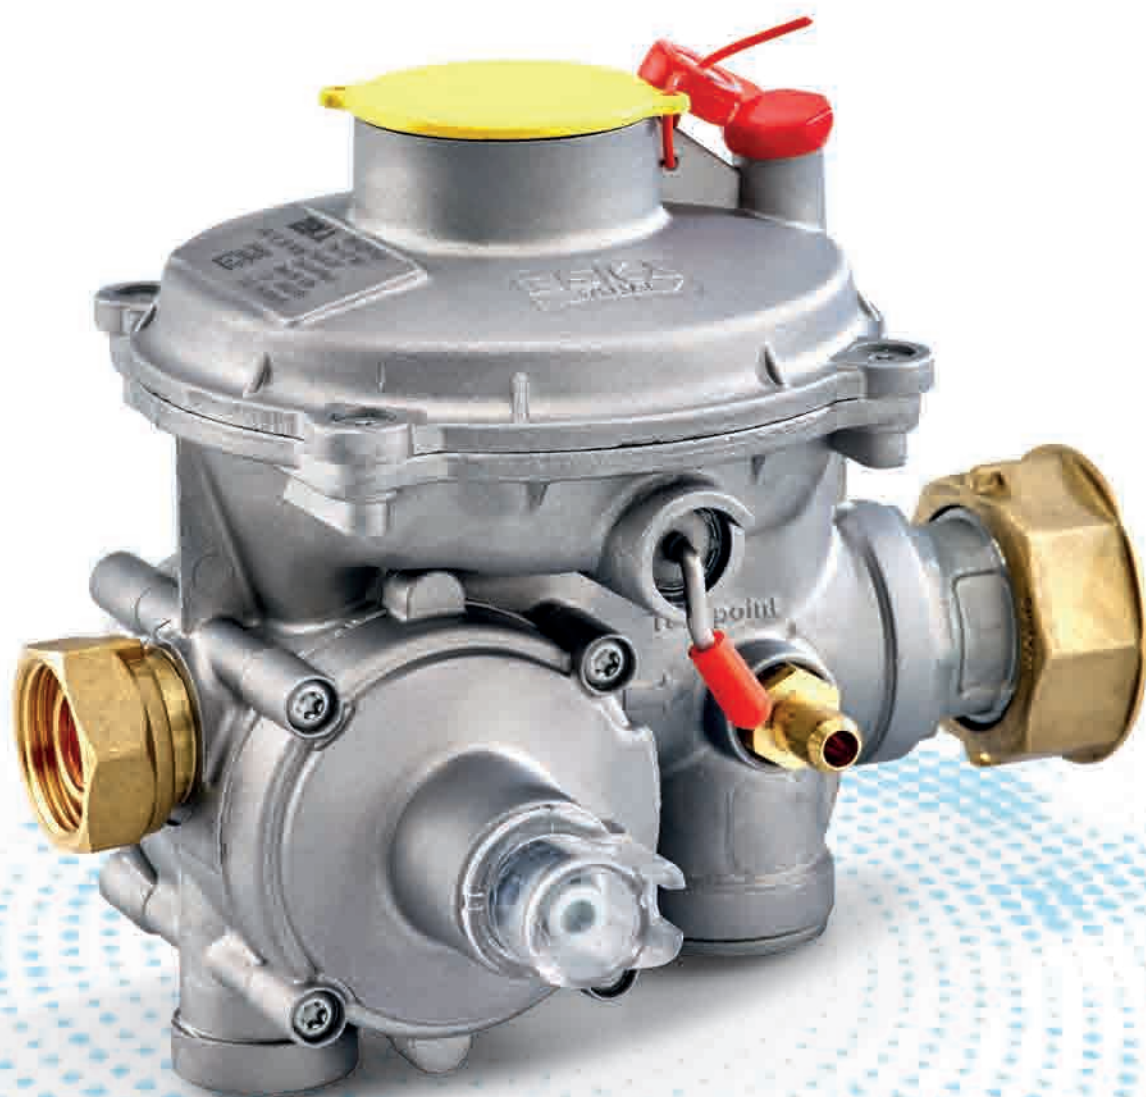

ERG-SE
SERIES

ERG-SE Series double stage pressure regulator is used on gas line to reduce inlet pressure to desired outlet pressure. It is suitable for both commercial and domestic usage where can be directly installed to gas meters with high operational reliability and accurate outlet pressure accuracy.

Simple installation procedure.

Due to different inlet and outlet connection range, ERG-SE Series can be used along with pipe diameter from DN15 to DN50 with different thread standards as well as BSP, BSPT, NPT, NPP.

The modular concept of ERG-SE and wide range availability of inlet and outlet connections allow to match particular customer requirements.

The regulators are manufactured according to **Ped Directive 2014/68/EU**. The functional tests are performed according to **EN334**.


FEATURES

- For medium pressure domestic or commercial second group gas lines.
- Optional metallic mesh filter for easy change and guarantees longer operation life of regulator.
- Outlet pressure tolerance is $\pm 10\%$ (AC10) up $\pm 5\%$ (AC5)
- Lock-up pressure tolerance is $\pm 20\%$ (SG20) up to 100 mbar outlet pressure, more than 100 mbar outlet pressure SG20 and SG10 possible.
- Up to 6 bar inlet pressure.
- 18 - 500 mbar outlet pressure range with interchangeable springs




Optional ;

- Incorporated Over Pressure Shut Off Valve.
- Incorporated Under Pressure Shut Off Valve.
- Internal Relief Valve

DIMENSIONS

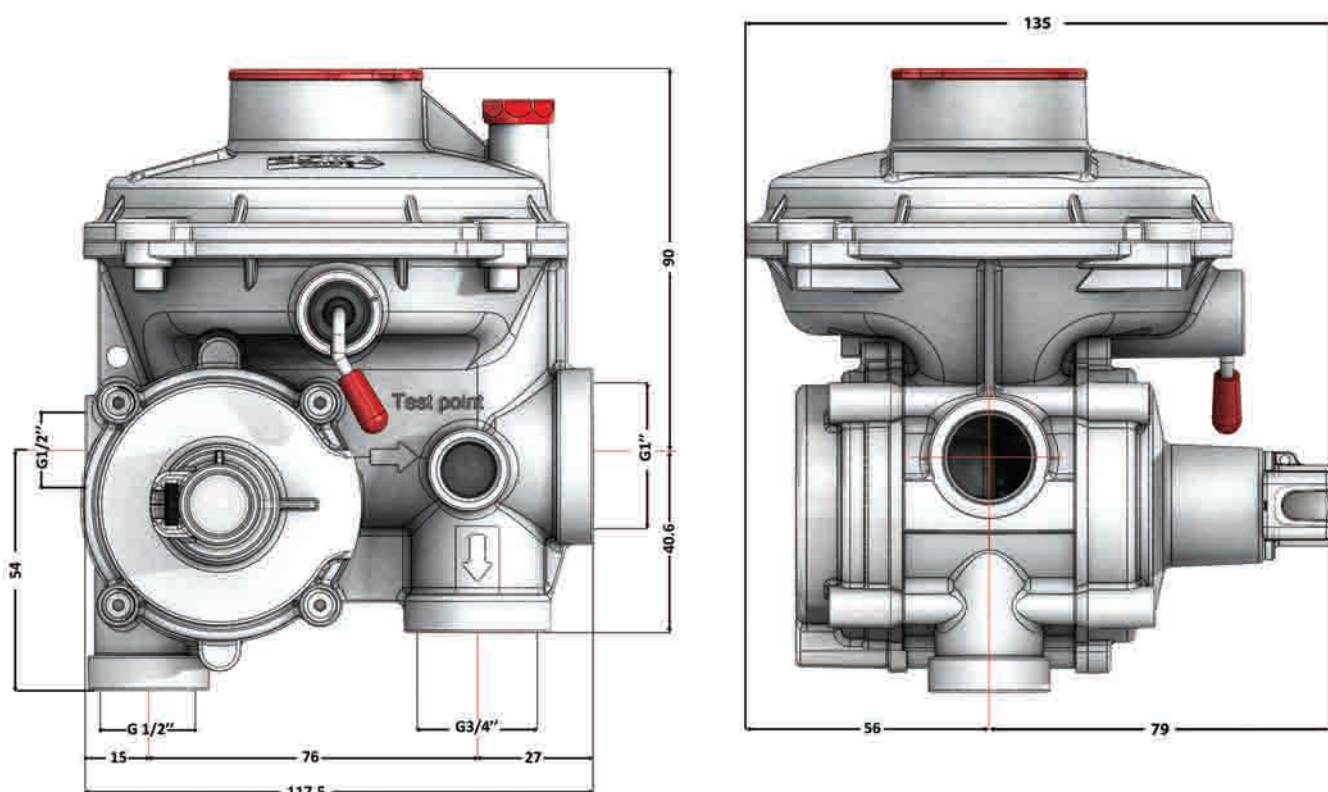

CONNECTION TYPES

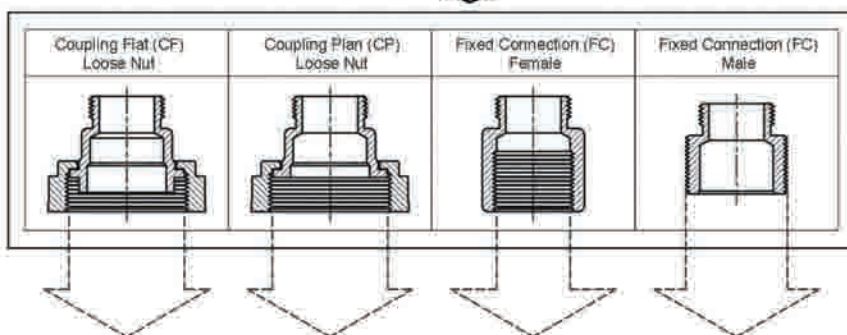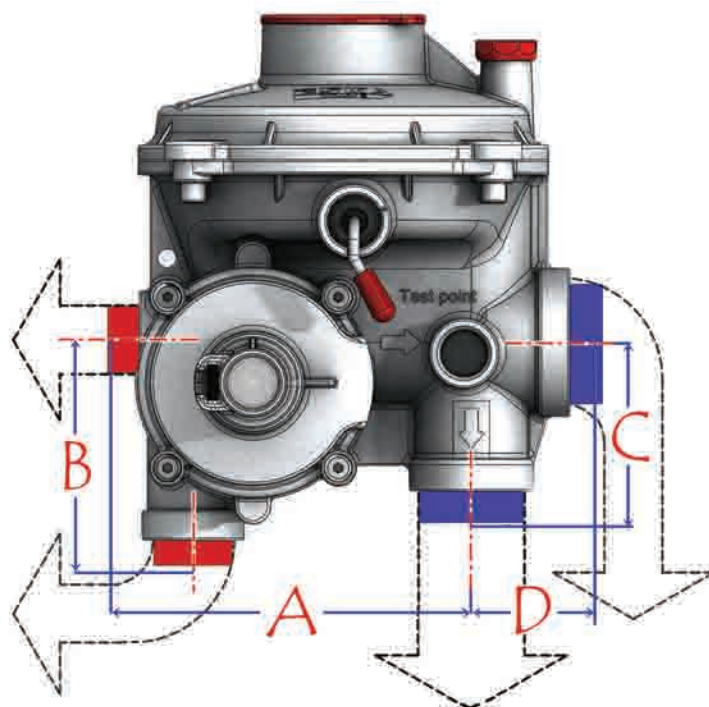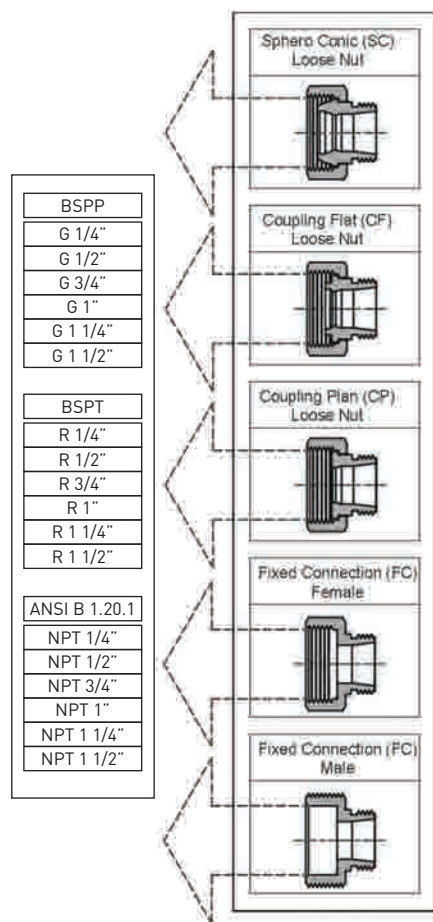

BSPP	BSPT	ANSI B 1.20.1
G 1/4"	R 1/4"	NPT 1/4"
G 1/2"	R 1/2"	NPT 1/2"
G 3/4"	R 3/4"	NPT 3/4"
G 1"	R 1"	NPT 1"
G 1 1/4"	R 1 1/4"	NPT 1 1/4"
G 1 1/2"	R 1 1/2"	NPT 1 1/2"

INLET	1/2" Tapa	1/2" CF	3/4" SC	3/4" CF	7/8"	1" FC (Female)	1" CF	1 1/4" CF
OUTLET	3/4" Tapa	1/2" CF	3/4" CF	7/8"	1" CF	1" FC (Female)	1 1/4" CF	1 1/4" CF
	1" Tapa	1/2" CF	3/4" CF	7/8"	1" CF			


SAFETY AND ACCESSORIES

Relief System

Regulator can be produced with a relief valve. Relief valve monitors outlet pressure continuously and when it detects pressure level higher than regulator's nominal outlet pressure, it activates and discharges gas to the atmosphere.

Relief valve has limited discharge capacity. Usually calibration point is lower than OPSO system. Under certain conditions such as gas expansion during hot weather seasons, Relief Valve is activated before OPSO closes the gas lines. It prevents random shut-off regarding pressure increase on outlet side.


Relief valve can be recalibrated by using proper tools.

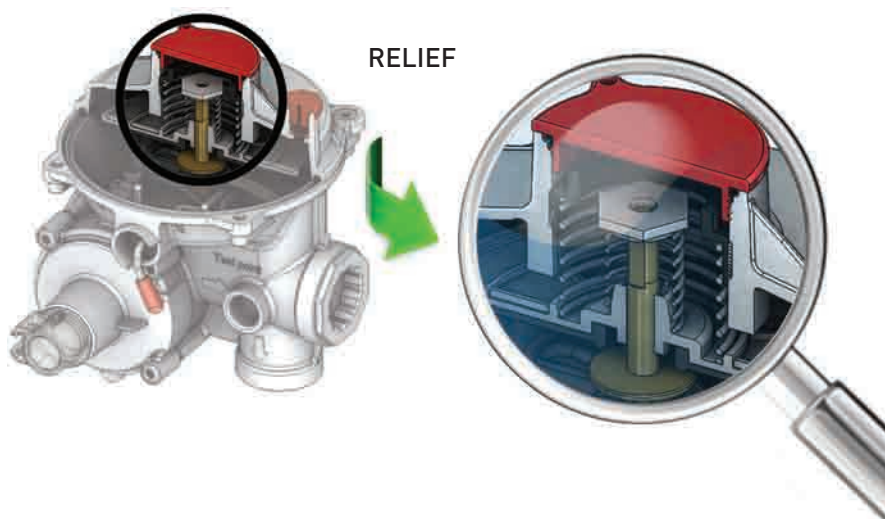

Over Pressure Shut-Off System

OPSO system is very useful during major breakdown situations and keeps the customer side safe. System works as a security valve and activates itself when the outlet pressure passes OPSO calibration point. OPSO system cuts the gas off, and manual reset is needed to activate the regulator again.

System has an independent shut-off mechanism and orifice and it monitors outlet pressure changes continuously, so activation time is below 2 seconds.

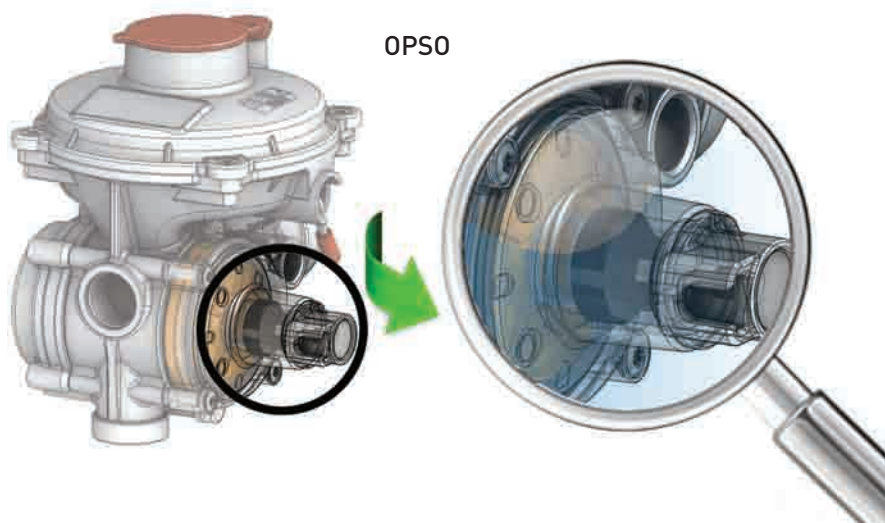


Under Pressure Shut-Off System.


UPSO system on ERG- SE series regulator acts under those circumstances;

- When there is no pressure inlet side.
- When the consumption exceed regulator's maximum capacity. [$101 \cdot Q$ to $150 \cdot Q$]
- When the pressure drop outlet side due to consumption.

UPSO valve continuously monitors outlet pressure changes. Scenarios like, pipeline breakdown on outlet sides, or consumption is exceeding the total capacity of regulator or lack of inlet pressure situations etc...the outlet pressure drops and the regulator cuts the gas off once UPSO system is activated.

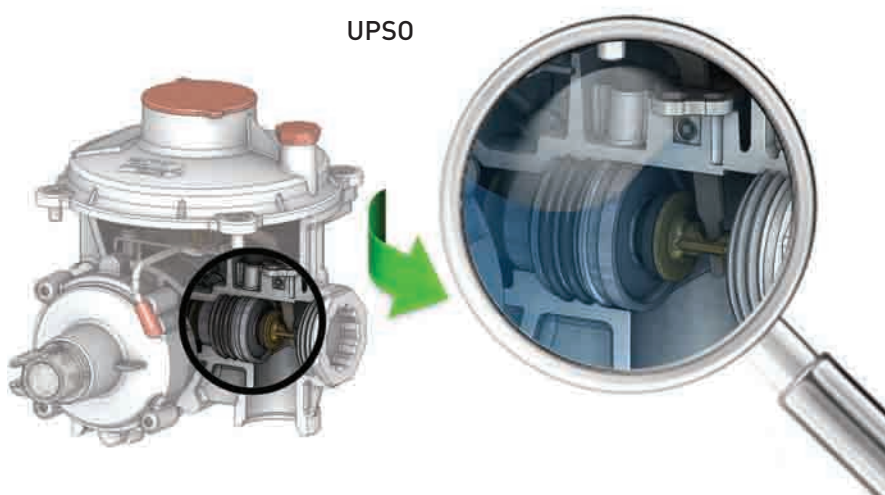

CONFIGURATIONS

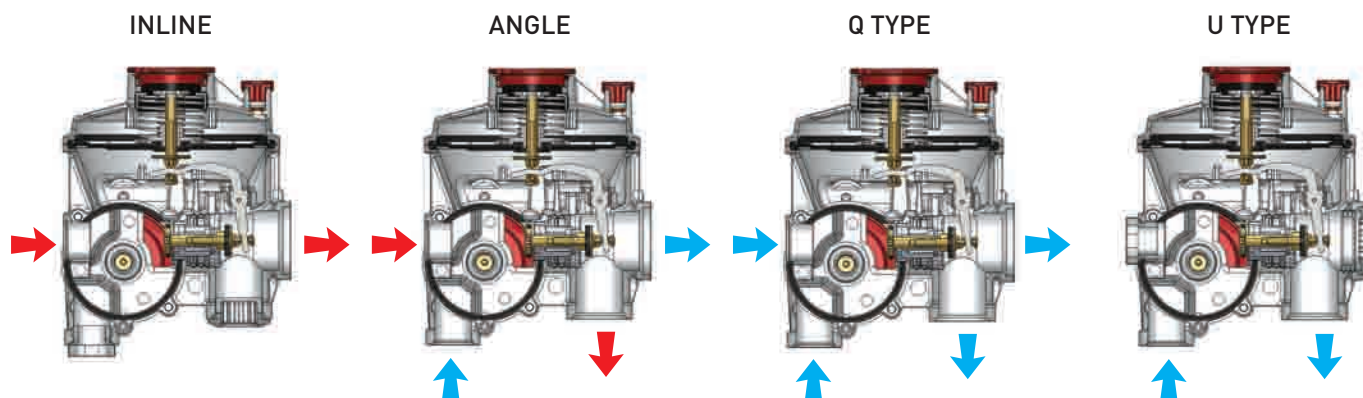

SPECIFICATIONS

Medium	: Natural Gas, LPG and Non-Corrosive Gases
Operating temperature	: -20... + 60°C (optional : -40... +60°C)
Assembly	: Vertical and Horizontal Position
Maximum inlet pressure	: 6 bar
Minimum inlet pressure	: Depending on customer request can start as low as 0,1 bar.
Outlet pressure range	: 18 to 500 mbar.
Filter	: Included

DESIGN

The ERG-SE Series pressure regulator body may consists of:

- Valve housing
- Connections
- Filter
- Ventilation console
- Outlet pressure test point
- Integrated security valves (OPSO / UPSO / Relief)

MATERIALS

- Body and covers Aluminum according to EN1706 standard.
- Rubber components are Nitril Rubber comply to EN 549.
- Brass materials are suitable according to EN12164 - EN12165 Standard.
- Filter material is metallic mesh filter.

MODELS

MODEL	FLOW RATE			UNIT WEIGHT (kgs)	BOX SIZE (LxWxH cm)	PACKAGING (pieces/ carton)	CARTON SIZE (LxWxH cm)	CARTON (weight)	TOTAL CARTON (weight)
	LPO 18-75 mbar	MPO 75-150 mbar	HPO 150-500 mbar						
ERG-SE 06	6			1,15	15x14.5x16	16	33x58x35	0.65kg	19.5 kg
ERG-SE 10	10			1,15	15x14.5x16	16	33x58x35	0.65kg	19.5 kg
ERG-SE 25	25			1,15	15x14.5x16	16	33x58x35	0.65kg	19.5 kg
ERG-SE 50	50			1,15	15x14.5x16	16	33x58x35	0.65kg	19.5 kg

BESIDE STANDARD FLOW RATES ABOVE, 1,6 / 2,5 / 15 / 30 / 40 / 60 / 65 SCMH ARE AVAILABLE UPON REQUEST.

ESKA

www.eskavalve.com



ERG-SR
SERIES

ERG-SR Series pressure regulator is used on gas line to reduce inlet pressure to desired outlet pressure. It is suitable for both commercial and residential usage where can be directly installed to gas meters with high operational reliability and accurate outlet pressure accuracy.

Simple installation procedure. Direction of the line can be inline or angle.

Due to different inlet and outlet connection range, ERG-SR Series can be used along with pipe diameter from DN20 to DN50 with different thread standards as well as BSP, BSPT, NPT, NPP. (Also, can be added to flange connection.)


The regulators are manufactured according to **Ped Directive 2014/68/EU**. The functional tests are performed according to **EN334**.

FEATURES


- For medium pressure domestic or commercial second group gas lines.
- Optional metallic mesh filter for easy change and guarantees longer operation life of regulator.
- Outlet pressure tolerance is $\pm 10\%$ (AC10) up $\pm 5\%$ (AC5)
- Lock-up pressure tolerance is $\pm 20\%$ (SG20) up to 100 mbar outlet pressure, more than 100 mbar outlet pressure SG20 and SG10 possible.
- Up to 6 bar inlet pressure.
- 15 - 360 mbar outlet pressure range with interchangeable springs
- OPS0 pressure range 35 - 520 mbar
- UPS0 pressure range 8 - 250 mbar



CONFIGURATIONS

INLINE TYPE

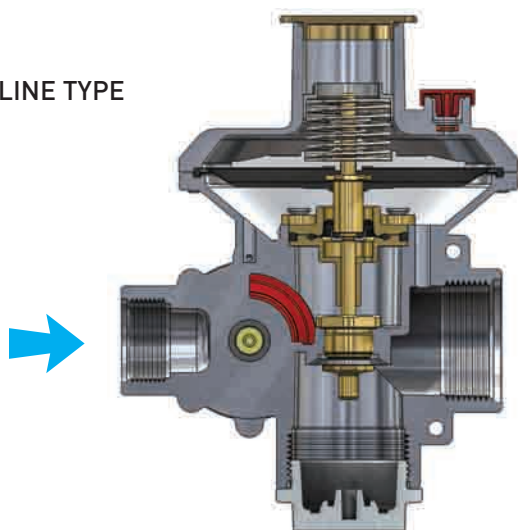

ANGLE TYPE

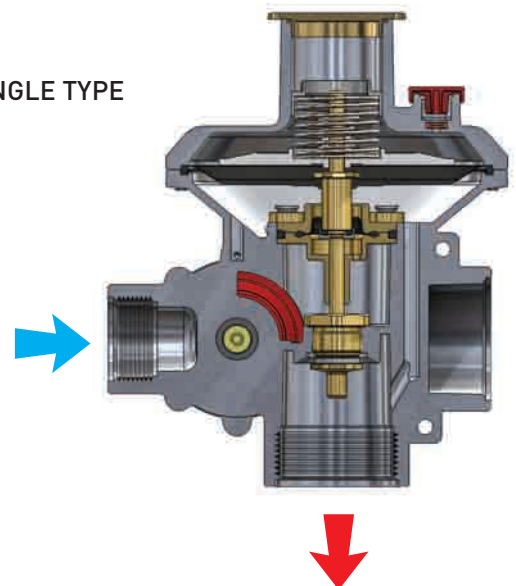

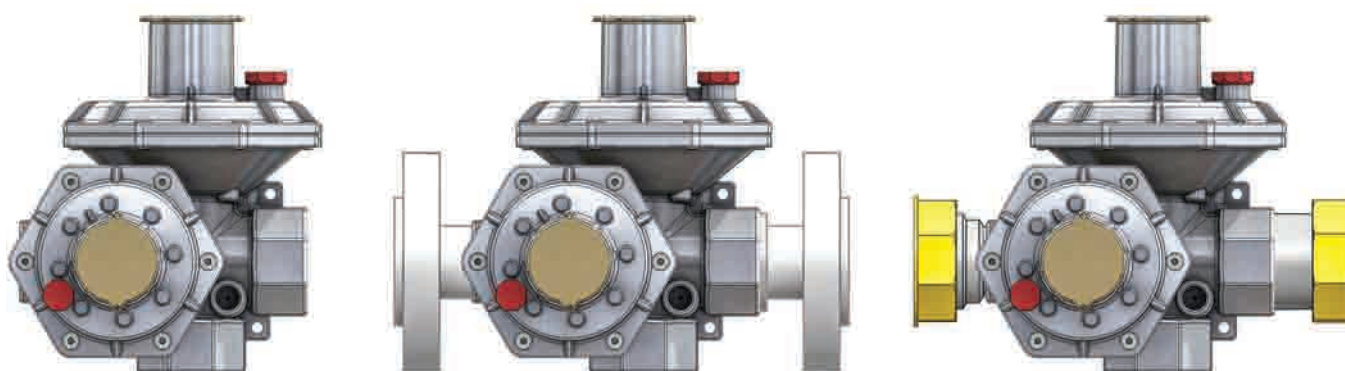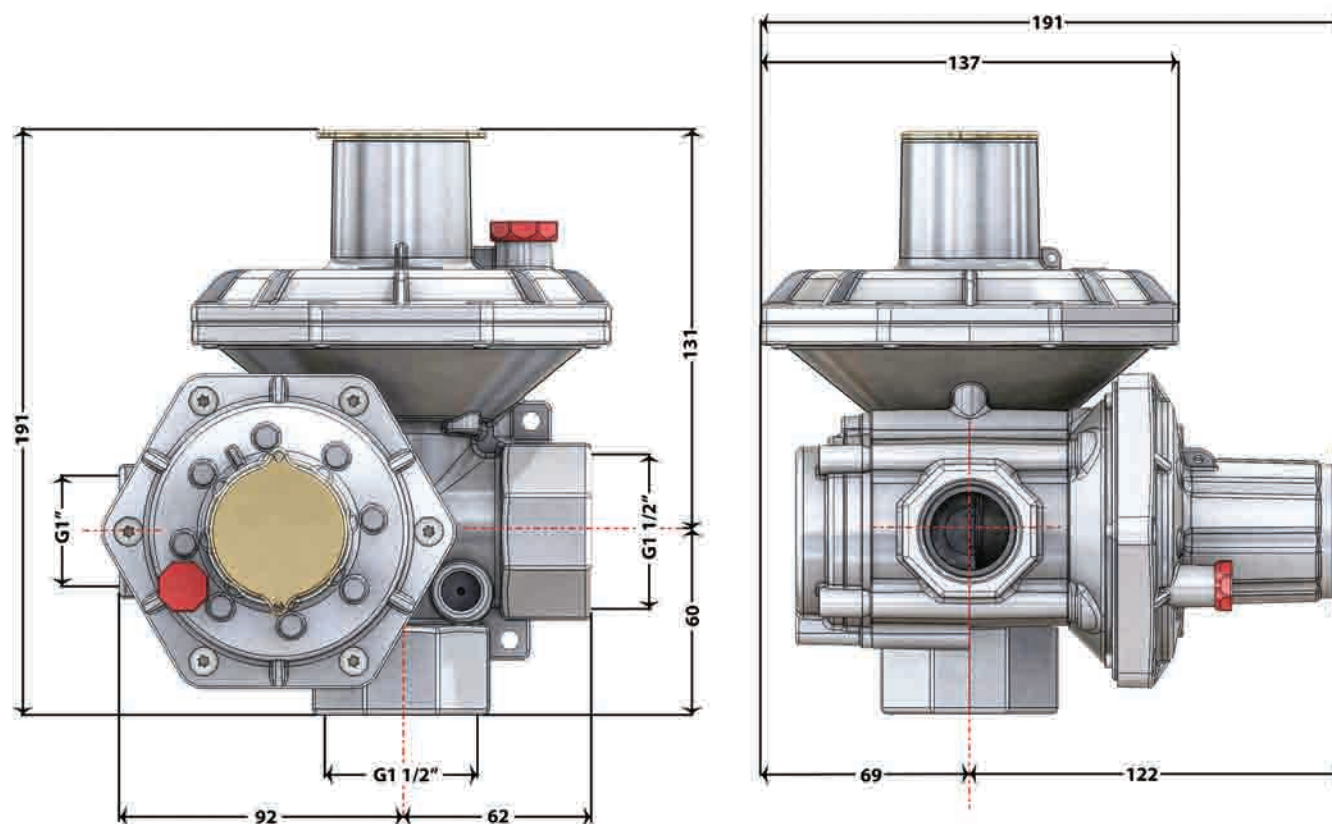

With Loose Connection


SAFETY AND ACCESSORIES

Relief System

Regulator can be produced with a relief valve. Relief valve monitors outlet pressure continuously and when it detects pressure level higher than regulator's nominal outlet pressure, it activates and discharges gas to the atmosphere.

Relief valve has limited discharge capacity. Usually calibration point is lower than OPSO system. Under certain conditions such as gas expansion during hot weather seasons, Relief Valve is activated before OPSO closes the gas lines. It prevents random shut-off regarding pressure increase on outlet side.


Relief valve can be recalibrated by using proper tools.

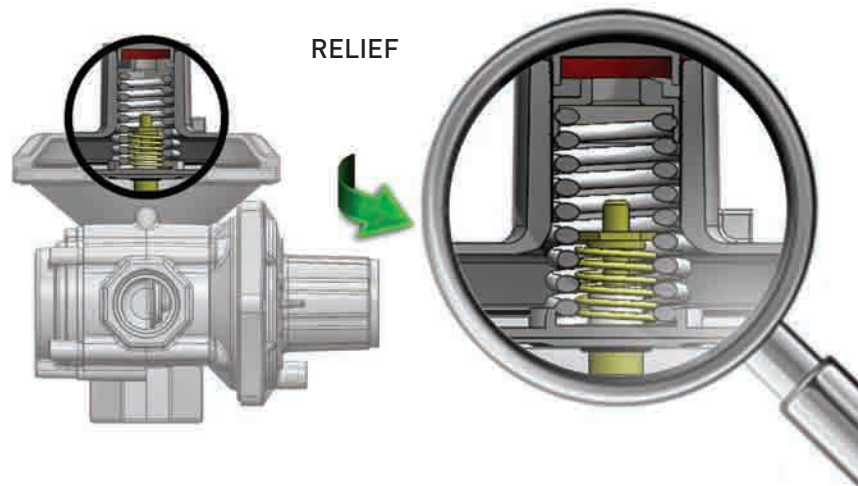

Over Pressure Shut-Off System

OPSO system is very useful during major breakdown situations and keeps the customer side safe. System works as a security valve and activates itself when the outlet pressure passes OPSO set point. OPSO system cuts the gas off, and manual reset is needed to activate the regulator again.

System has an independent shut-off mechanism and orifice and it monitors outlet pressure changes continuously, so the activation time is below 2 seconds.

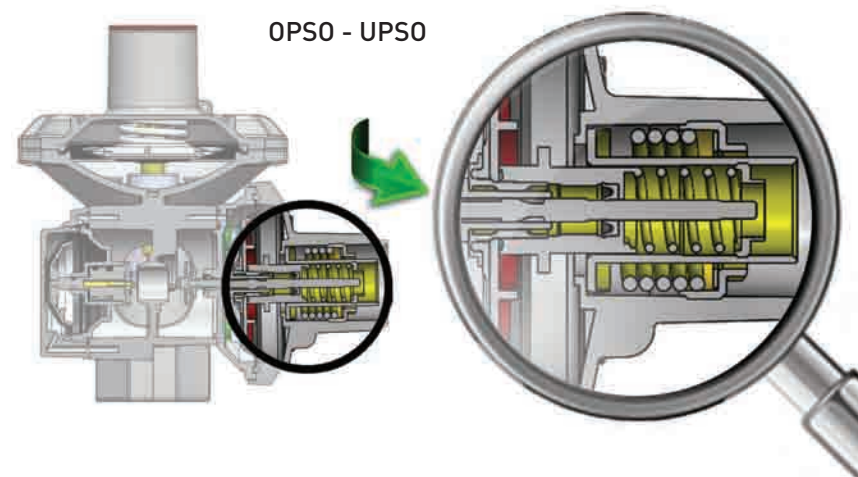

Under Pressure Shut-Off System.

UPSO system on SR series regulator is pressure based. It cuts the gas off when the outlet pressure drops below the UPSO calibration point.

UPSO valve continuously monitors outlet pressure changes. Scenarios like, pipeline breakdown on outlet sides, or consumption is exceeding the total capacity of regulator or lack of inlet pressure situations etc...the outlet pressure drops and the regulator cuts the gas off once UPSO system is activated.

SPECIFICATIONS

Medium	: Natural Gas, LPG and Non-Corrosive Gases
Operating temperature	: -20... + 60 °C (optional : -40... +60 °C)
Assembly	: Vertical and Horizontal Position
Maximum inlet pressure	: 6 bar
Outlet pressure range	: 15 to 360 mbar.
Referring	: Ped 2014/68/EU
Filter	: Included

DESIGN

The ERG-SR Series pressure regulator body consists of:


- Loose nut or body thread or flanged connection
- Filter
- Ventilation console
- Outlet pressure test point
- Integrated security valves

MATERIALS

- Body and covers Aluminum comply with EN1706 standard.
- Rubber components comply with EN549.
- Brass materials comply with EN12164 Standard.
- Filter material is metallic mesh filter.

MODELS

MODEL	NOMINAL CAPACITY	REQUIRED MINIMUM INLET PRESSURE BAR (PSI)
ERG-SR 50	50 STM3/H	OUTLET PRESSURE + 0.5
ERG-SR 75	75 STM3/H	OUTLET PRESSURE + 0.5
ERG-SR 100	100 STM3/H	OUTLET PRESSURE + 0.5

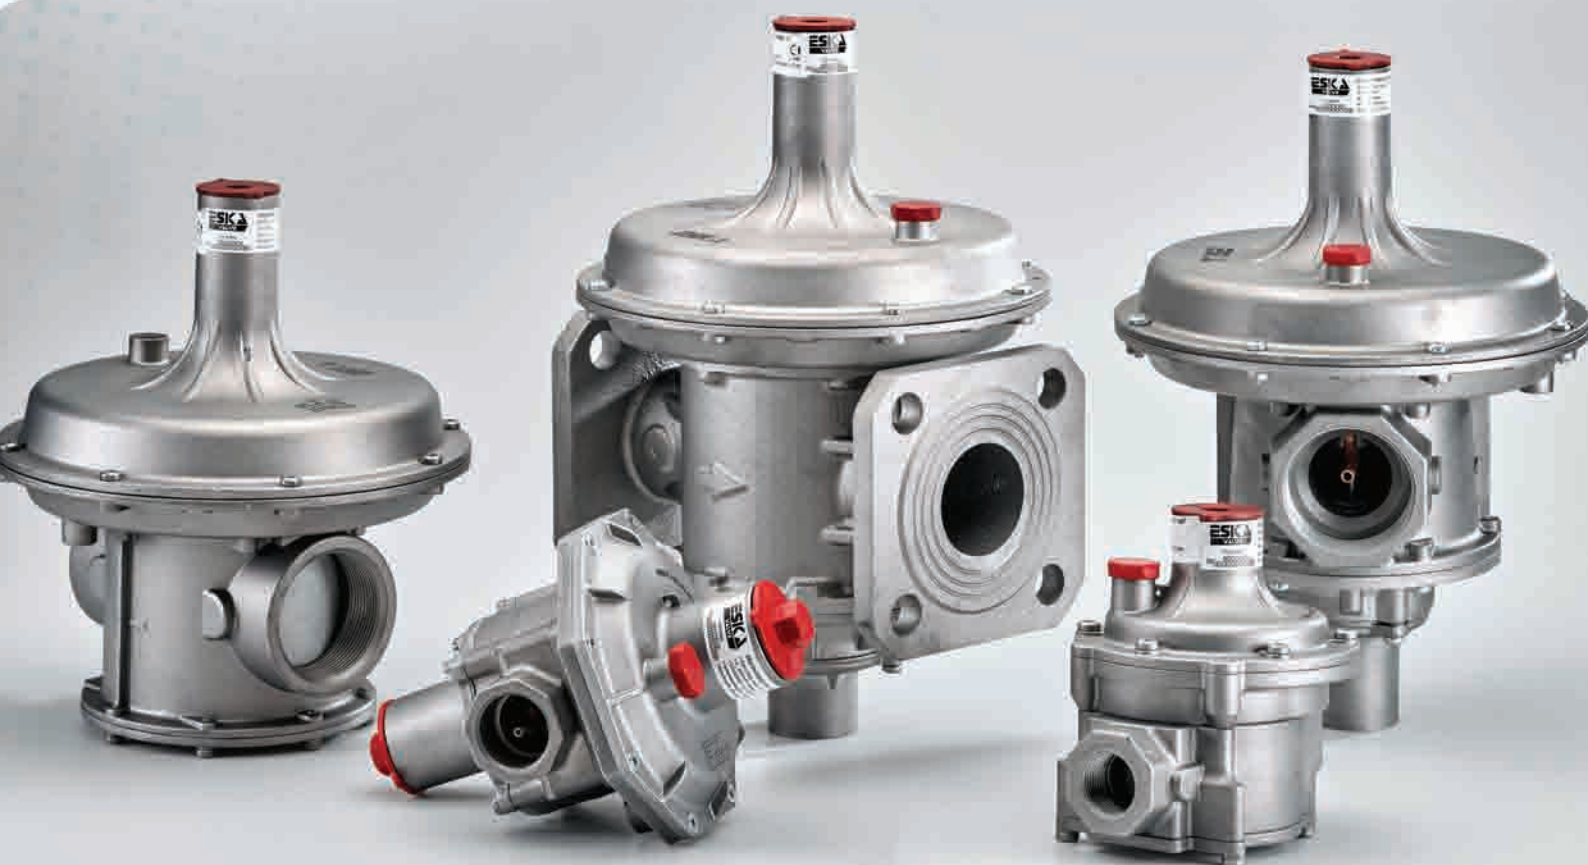

SINGLE STAGE
GAS PRESSURE REGULATOR

ESKA


www.eskavalve.com




ERG
SERIES

INTRODUCTORY

ERG series gas pressure regulators are used in the gas lines in order to reduce maximum 1 bar input pressure to the desired output pressure between 16 and 150 mbar. The range of the output pressure can be set with the choice of a different spring.

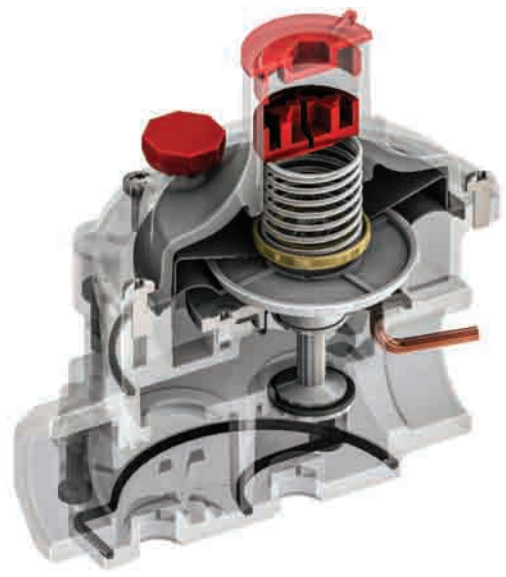

ERG 1015 - 1020 - 1025

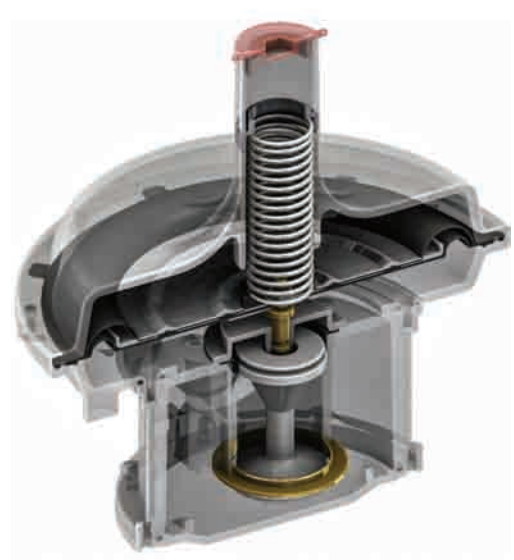


ERG 1032 - 1040 - 1050

TECHNICAL INFORMATION


- Usage : City gas networks and gas pipelines in industrial areas
- Medium : Non-corrosive gases such as Natural Gas (Methane), LPG, Town Gas, Air, etc...
- Pressure Class : PN0.5
- Connection or Port Size : 1/2", 3/4", 1", 1 1/4", 1 1/2", 2" Threaded (Female)
- Inlet Pressure Range : 0.05 up to 0.5 bar
- Outlet Pressure Range : 16 mbar up to 150 mbar
- Filter : Optional
- Number of Stages : Single Stage
- Accuracy Class : AC 10 ($\pm 10\%$) (On Request AC5, AC15, AC20)
- Lock Up Pressure Class : SG30 (+ 30%) (On Request SG10, SG20)
- Ambient Temperature : -20°C up to 60°C (On request -40 °C)
- Material Standard : Aluminum-EN 1706 / Brass-EN 12164 and EN 12165 / Rubber-EN 549
- According to Directives : 2014/68/EU

ERG SERIES CAPACITY GRAPH

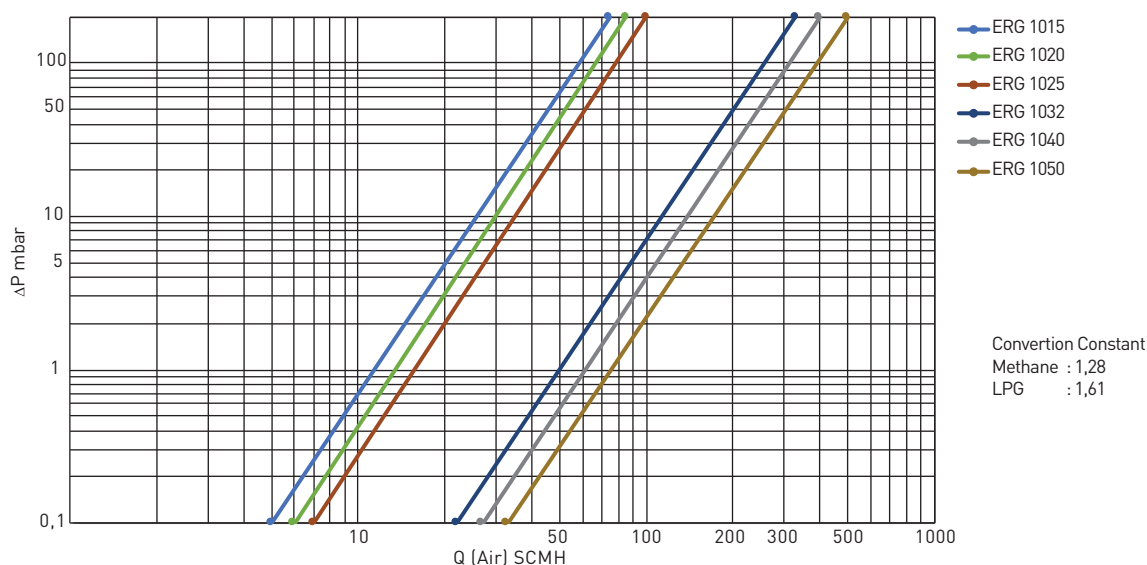


CONFIGURATIONS

INLINE

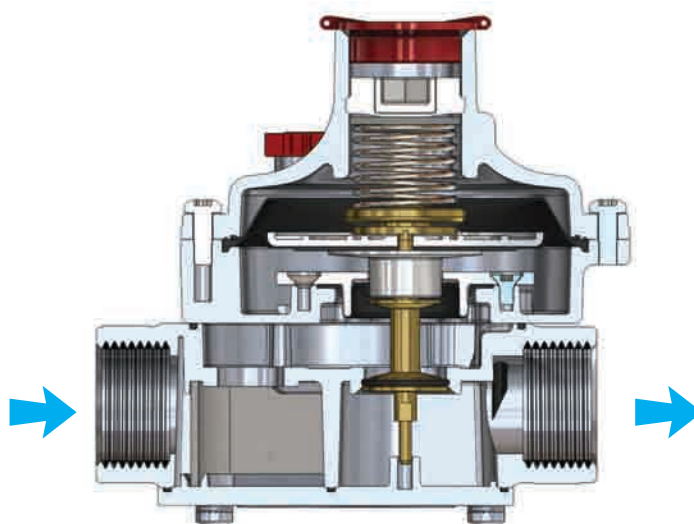

ERG 1015 - 1020 - 1025

INLINE

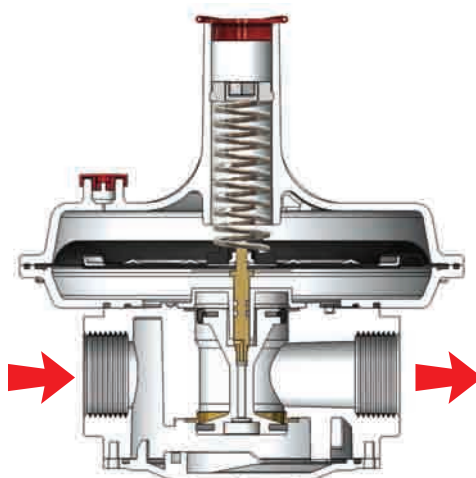


ERG 1032 - 1040 - 1050


CONNECTION	OUTLET PRESSURE (21mbar)
1/2"	20 m ³ /h
3/4"	25 m ³ /h
1"	35 m ³ /h
1 1/4"	85 m ³ /h
1 1/2"	100 m ³ /h
2"	120 m ³ /h

FLOW RATE TABLE (FOR NATURAL GAS) AT INLET PRESSURE 300 mbar ACCURACY CLASS AC10

DIMENSIONS

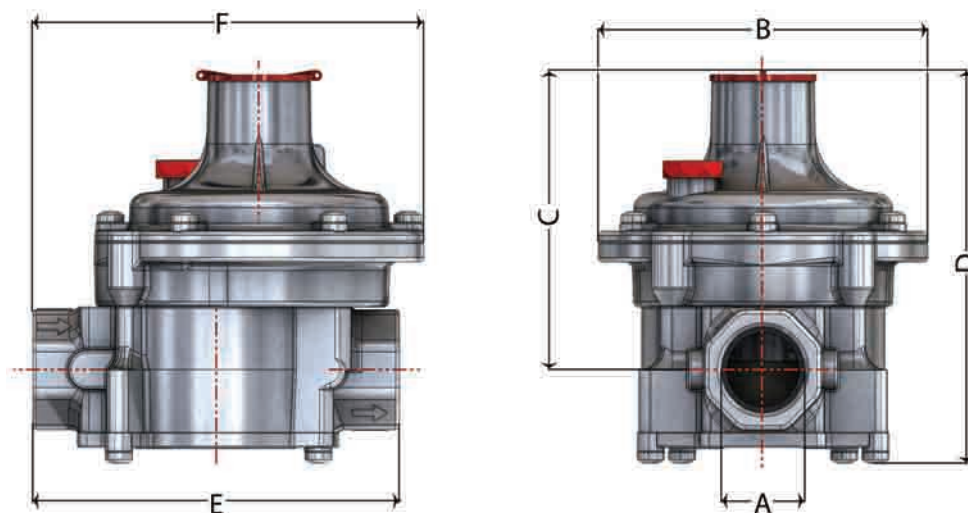

MODEL	A	B	C	D	E	F
ERG 1015	1/2"	122	107	141	136	145
ERG 1020	3/4"	122	107	141	136	145
ERG 1025	1"	122	107	141	136	145

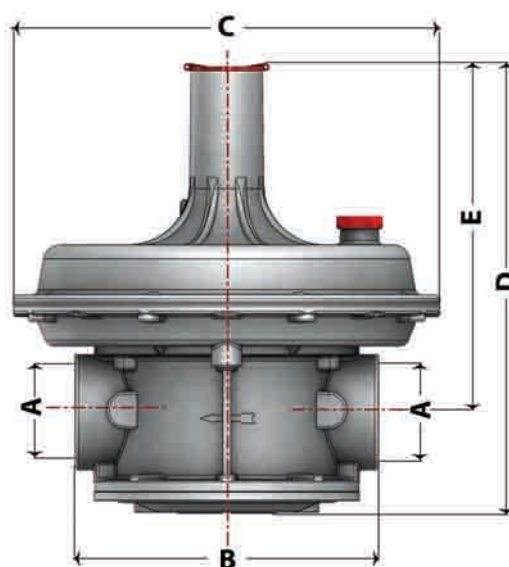

MODEL	A	B	C	D	E
ERG 1032	1 1/4"	160	225	237	183
ERG 1040	1 1/2"	160	225	237	183
ERG 1050	2"	162	225	259	192

ESKA

www.eskavalve.com



ERG-E
SERIES

INTRODUCTORY

ERG-E series gas pressure regulators are used in the gas lines in order to reduce maximum 1 bar input pressure to the desired output pressure between 16 and 150 mbar. The range of the output pressure can be set with the choice of a different spring. The regulator with safety stopping gets automatically active and stops the gas flow in case that the input pressure gets higher or lower than the adjusted value in order to ensure the safety of the devices used in the system thanks to the safe stopping system it includes.



ERG-E 1015 - 1020 - 1025




ERG-E 1032 - 1040 - 1050


TECHNICAL INFORMATION

- Usage : City gas networks and gas pipelines in industrial areas
- Medium : Non-corrosive gases such as Natural Gas (Methane), LPG, Town Gas, Air, etc...
- Pressure Class : PN0.5
- Connection or Port Size : 1/2", 3/4", 1", 1 1/4", 1 1/2", 2" Threaded (Female)
- Inlet Pressure Range : 0.05 up to 0.5 bar
- Outlet Pressure Range : 16 mbar up to 150 mbar
- Filter : Optional
- Number of Stages : Single Stage
- Accuracy Class : AC 10 ($\pm 10\%$) (On Request AC5, AC15, AC20)
- Lock Up Pressure Class : SG30 (+ 30%) (On Request SG10, SG20)
- Ambient Temperature : -20°C up to 60°C (On request -40 °C)
- OPSO Pressure Range : 30 mbar up to 200 mbar
- OPSO Pressure Tolerance : 20%
- UPSO Pressure Range : 12 mbar up to 40 mbar
- UPSO Pressure Tolerance : 20%
- Shut Off Time : Less than 1 second
- Structural Additional Features : With Shutoff
- Material Standard : Aluminum-EN 1706 / Brass-EN 12164 and EN 12165 / Rubber-EN 549
- According to Directives : 2014/68/EU


ERG-E SERIES CAPACITY GRAPH

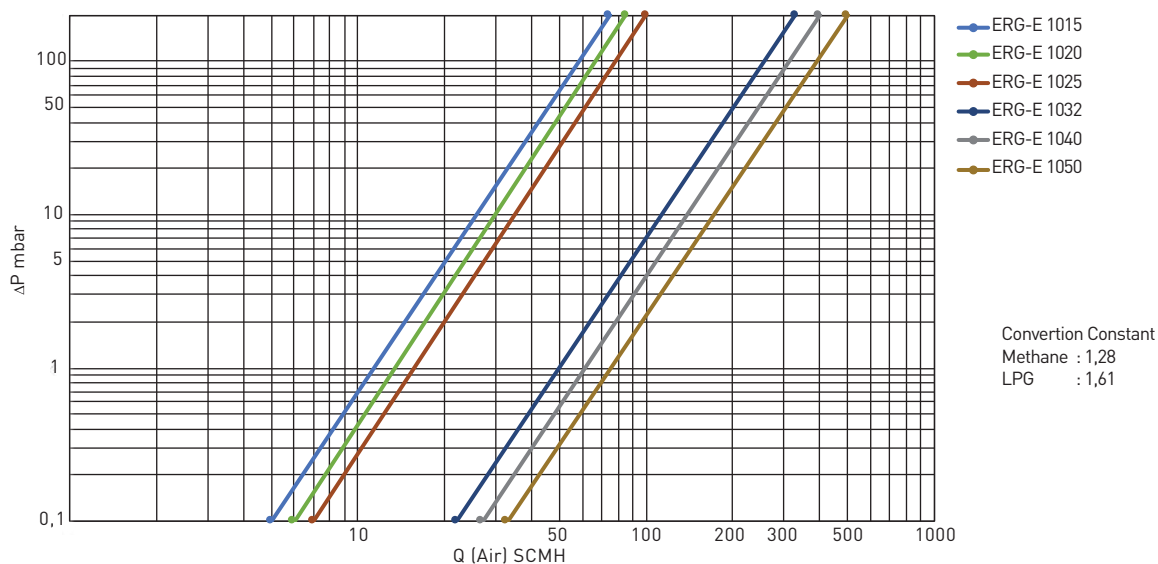

CONFIGURATIONS AND CONNECTION TYPES

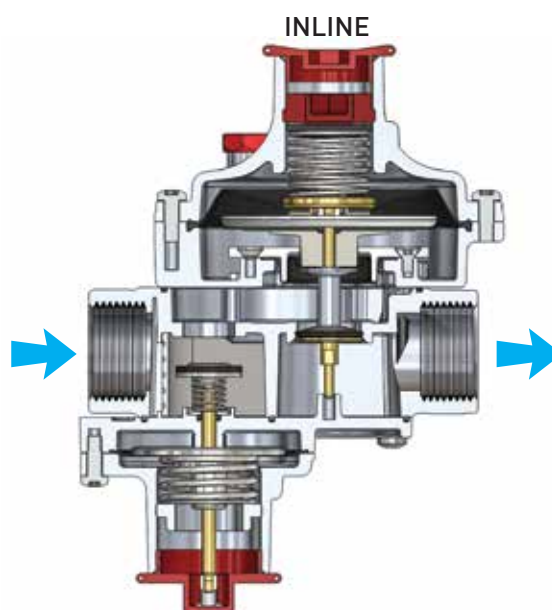

ERG-E 1015 - 1020 - 1025

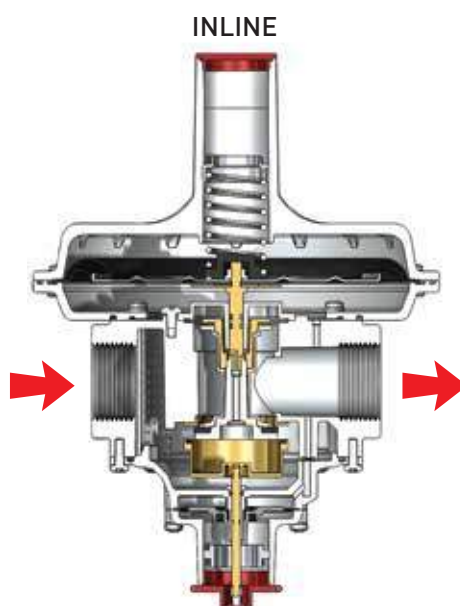


ERG-E 1032 - 1040 - 1050


CONNECTION	OUTLET PRESSURE (21mbar)
1/2"	20 m ³ /h
3/4"	25 m ³ /h
1"	35 m ³ /h
1 1/4"	85 m ³ /h
1 1/2"	100 m ³ /h
2"	120 m ³ /h

FLOW RATE TABLE (FOR NATURAL GAS) AT INLET PRESSURE 300 mbar ACCURACY CLASS AC10

DIMENSIONS

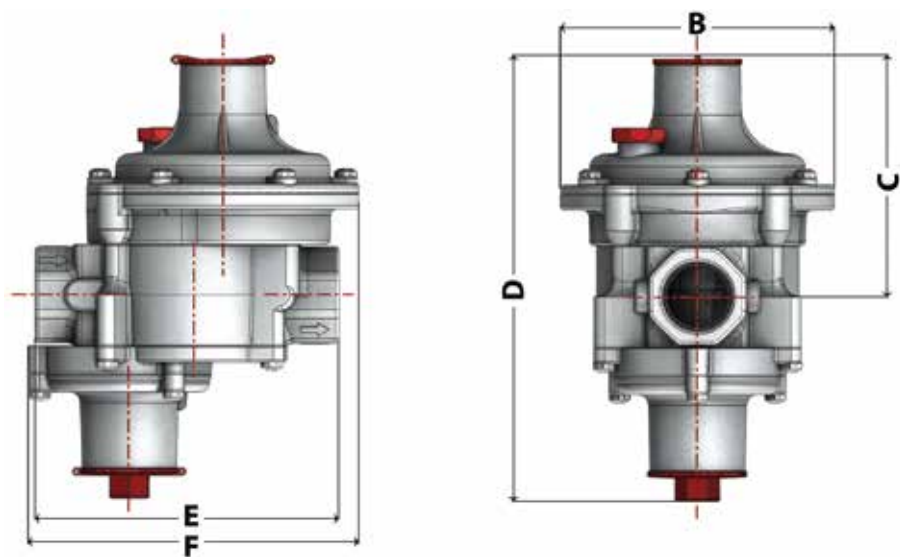

MODEL	A	B	C	D	E	F
ERG-E 1015	1/2"	122	106	198	136	146
ERG-E 1020	3/4"	122	106	198	136	146
ERG-E 1025	1"	122	106	198	136	146

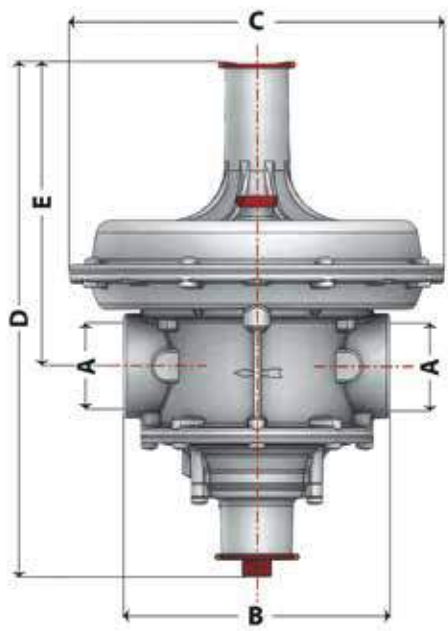

MODEL	A	B	C	D	E
ERG-E 1032	1 1/4"	160	225	311	183
ERG-E 1040	1 1/2"	160	225	311	183
ERG-E 1050	2"	162	225	333	192

ESKA

www.eskavalve.com




ERG-H
SERIES


INTRODUCTORY

ESKA ERG-H series gas pressure regulators are used in the gas lines in order to reduce maximum 5 bar input pressure to the desired output pressure between 16 and 500 mbar. The range of the output pressure can be set with the choice of different springs.

The regulators are manufactured according to PED Directive 2014/68/EU. The functional tests are performed according to EN334.

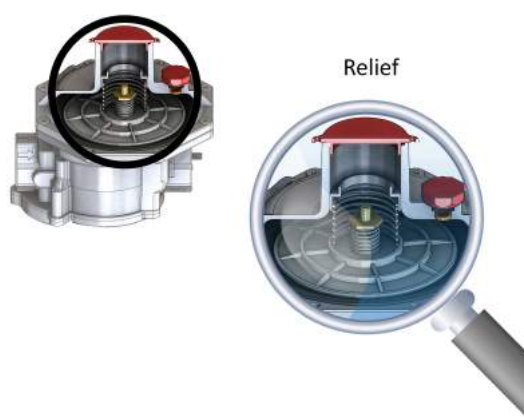


ERG-H 1015 - 1020 - 1025

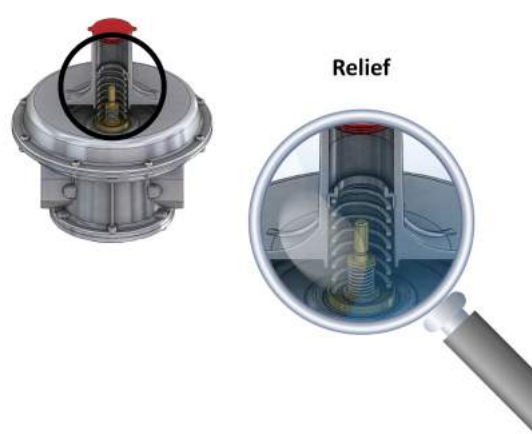


ERG-H 1032 - 1040 - 1050

CONFIGURATIONS

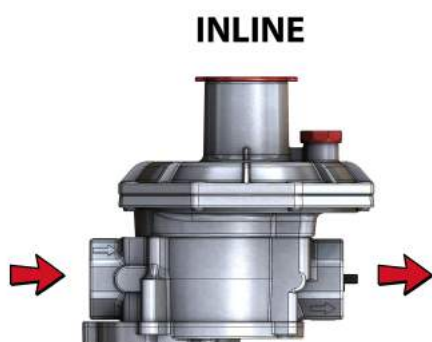

ERG-H 1015 - 1020 - 1025

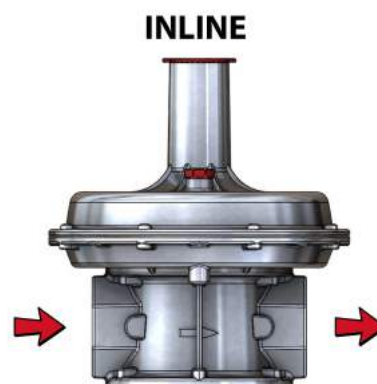

ERG-H 1032 - 1040 - 1050


TECHNICAL INFORMATION

- Usage : City gas networks and gas pipelines in industrial areas
- Medium : Non-corrosive gases such as Natural Gas (Methane), LPG, Town Gas, Air, etc...
- Pressure Class : PN5
- Connection or Port Size : 1/2", 3/4", 1", 1 1/4", 1 1/2", 2" Threaded and (Flanged)
- Inlet Pressure Range : 0.5 up to 5 bar
- Outlet Pressure Range : 16 mbar up to 500 mbar
- Filter : Optional
- Number of Stages : Single Stage
- Accuracy Class : AC 10 ($\pm 10\%$) (On Request AC5, AC15, AC20)
- Ambient Temperature : -20°C up to 60°C (On request -40 °C)
- Shut Off Time : Less than 1 second


- Material Standard : Aluminum-EN 1706 / Brass-EN 12164 and EN 12165 / Rubber-EN 549
- According to Directives : 2014/68/EU
- Capacity : Up to 1000m³/h



DIMENSIONS

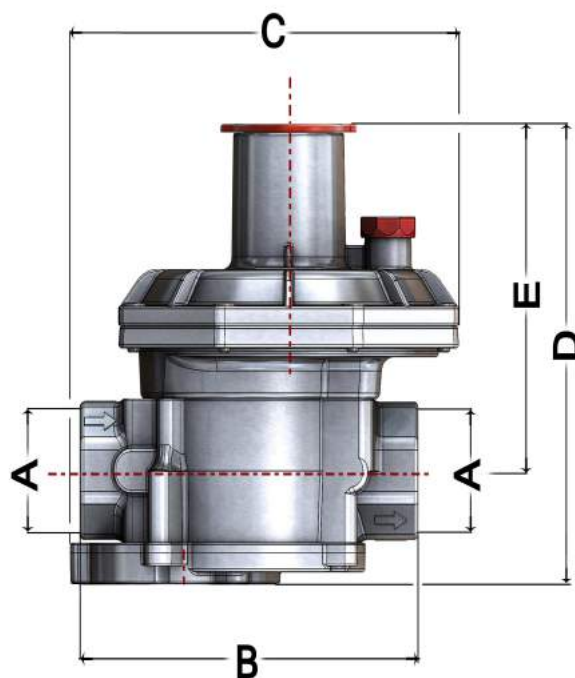

MODEL	A	B	C	D	E
ERG-H 1015	1/2"	136	156	144	110
ERG-H 1020	3/4"	136	156	144	110
ERG-H 1025	1"	136	156	144	110

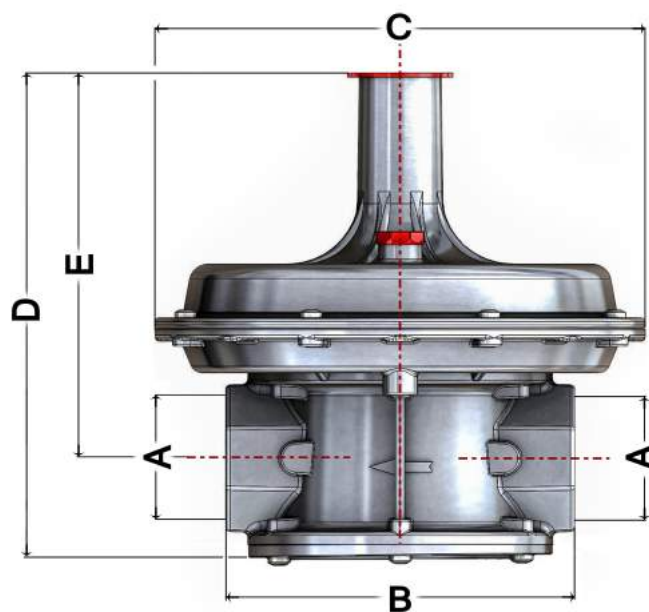

MODEL	A	B	C	D	E
ERG-H 1032	1 1/4"	160	225	238	183
ERG-H 1040	1 1/2"	160	225	238	183
ERG-H 1050	2"	162	225	238	192

ESKA

www.eskavalve.com



ERG-EH
SERIES

INTRODUCTORY

ERG-EH series gas pressure regulators are used in the gas lines in order to reduce maximum 5 bar input pressure to the desired output pressure between 16 and 500 mbar. The range of the output pressure can be set with the choice of a different spring. The regulator with safety stopping gets automatically active and stops the gas flow in case that the input pressure gets higher or lower than the adjusted value in order to ensure the safety of the devices used in the system thanks to the safe stopping system it includes.




ERG-EH 1015 - 1020 - 1025




ERG-EH 1032 - 1040 - 1050

CONFIGURATIONS

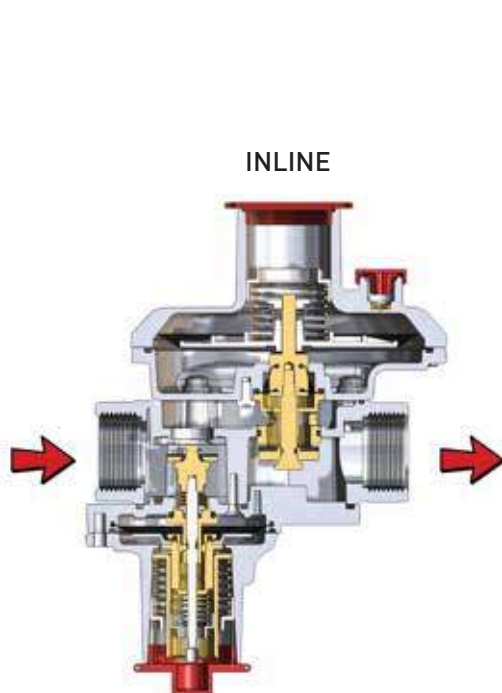

ERG-EH 1015 - 1020 - 1025

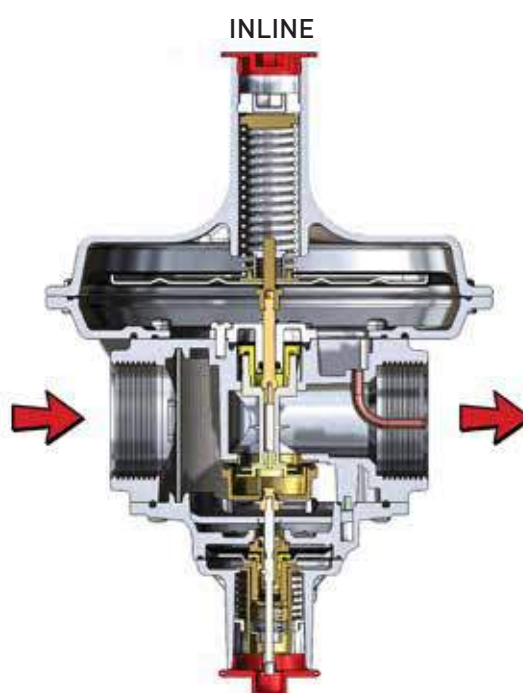


ERG-EH 1032 - 1040 - 1050


TECHNICAL INFORMATION

- Usage : City gas networks and gas pipelines in industrial areas
- Medium : Non-corrosive gases such as Natural Gas (Methane), LPG, Town Gas, Air, etc...
- Pressure Class : PN5
- Connection or Port Size : 3/4", 1", 1 1/4", 1 1/2", 2" Threaded and (Flanged)
- Inlet Pressure Range : 0.5 up to 5 bar
- Outlet Pressure Range : 16 mbar up to 500 mbar
- Filter : Optional
- Number of Stages : Single Stage
- Accuracy Class : AC 10 ($\pm 10\%$) (On Request AC5, AC15, AC20)
- Lock Up Pressure Class : SG30 (+ 30%) (On Request SG10, SG20)
- Ambient Temperature : -20°C up to 60°C (On request -40 °C)
- OPSO Pressure Range : 30 mbar up to 200 mbar
- OPSO Pressure Tolerance : 20%
- UPSO Pressure Range : 12 mbar up to 150 mbar
- UPSO Pressure Tolerance : 20%
- Shut Off Time : Less than 1 second
- Structural Additional Features : With Shutoff
- Material Standard : Aluminum-EN 1706 / Brass-EN 12164 and EN 12165 / Rubber-EN 549
- According to Directives : 2014/68/EU
- Capacity : Up to 1000m³/h

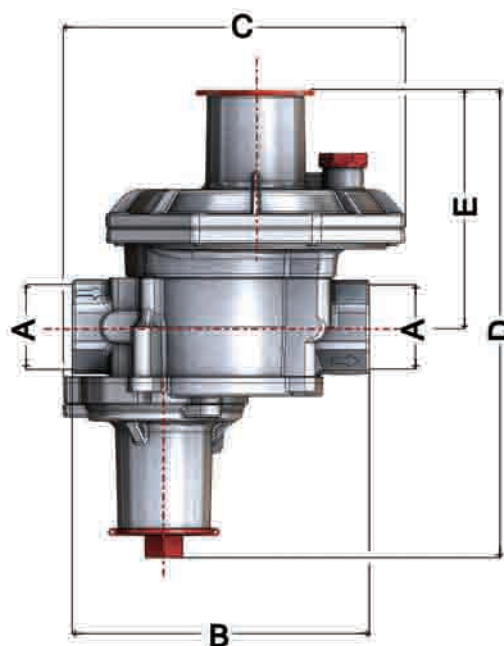

DIMENSIONS


MODEL	A	B	C	D	E
ERG-EH 1015	1/2"	136	156	215	110
ERG-EH 1020	3/4"	136	156	215	110
ERG-EH 1025	1"	136	156	215	110

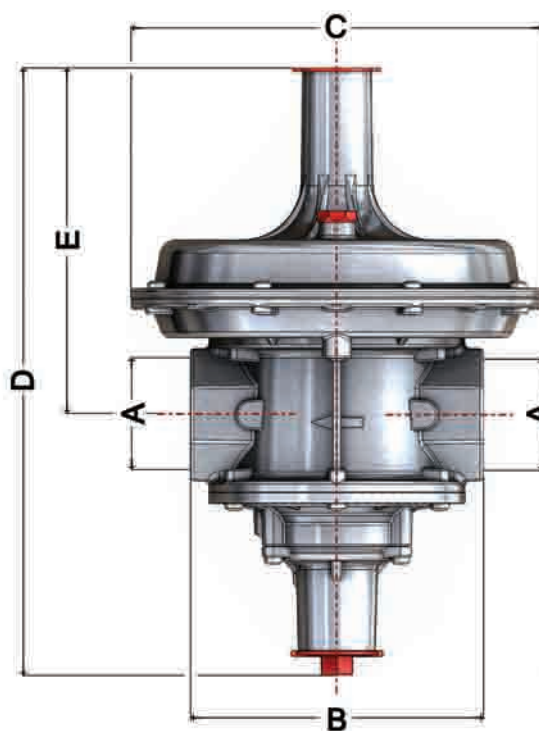

MODEL	A	B	C	D	E
ERG-EH 1032	1 1/4"	160	225	332	183
ERG-EH 1040	1 1/2"	160	225	332	183
ERG-EH 1050	2"	160	225	332	183



G A S
FILTER

ESKA


www.eskavalve.com




E G F
SERIES

INTRODUCTORY


EGF model gas filters are the elements that separates the dust particles carried by the gas or very small particles spread within the gas (for example: dust and rust), holds these and protects the burner, gas counter and adjustment devices which may possibly be damaged. Dust, woodchips, smut and other physical substances and dirt in the gas are held by the fiber. When the dust tank capacity is exceeded or a very high pressure difference effected, the filter loses its filter protection function. The filters are resistant against the mechanical and thermal stress that occur under operational conditions. The device must be kept away from rain and water as much as possible.

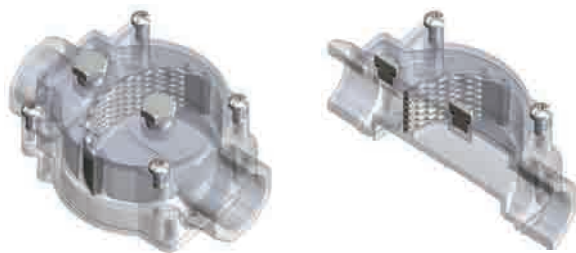

EGF 1015 - 1020 - 1025

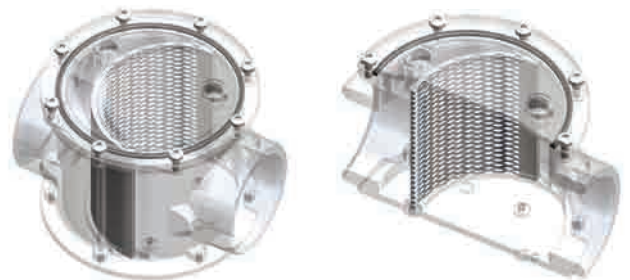

EGF 1032 - 1040 - 1050

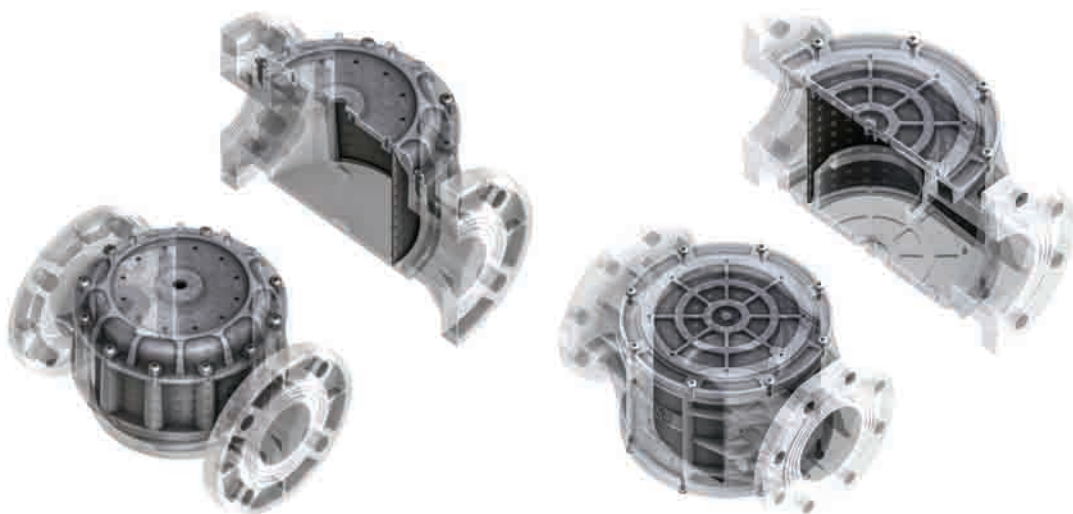


EGF 1065 - 1080 - 1100


TECHNICAL INFORMATION

- | | | | |
|---------------------------|--|-----------------------------|--|
| • Usage | : City gas networks and gas pipelines in industrial areas | • Filter | : Pore dimensions as standard 50 micron (10-20 microns on request) |
| • Fluid Type | : Non-corrosive gases such as Natural Gas (Methane), LPG, Town Gas, Air, etc... | • Ambient Temperature Range | : -20°C up to 60°C |
| • Pressure Class | : PN1 | • Pressure Test Connection | : 1/4" Threaded (Female) |
| • Connection or Port Size | : 1/2", 3/4", 1", 1 1/4", 1 1/2", 2" Threaded (Female) and DN65, DN80, DN100 Flanged | • Material Standard | : Aluminum EN 1706, Rubbers EN 549 |


CONFIGURATION

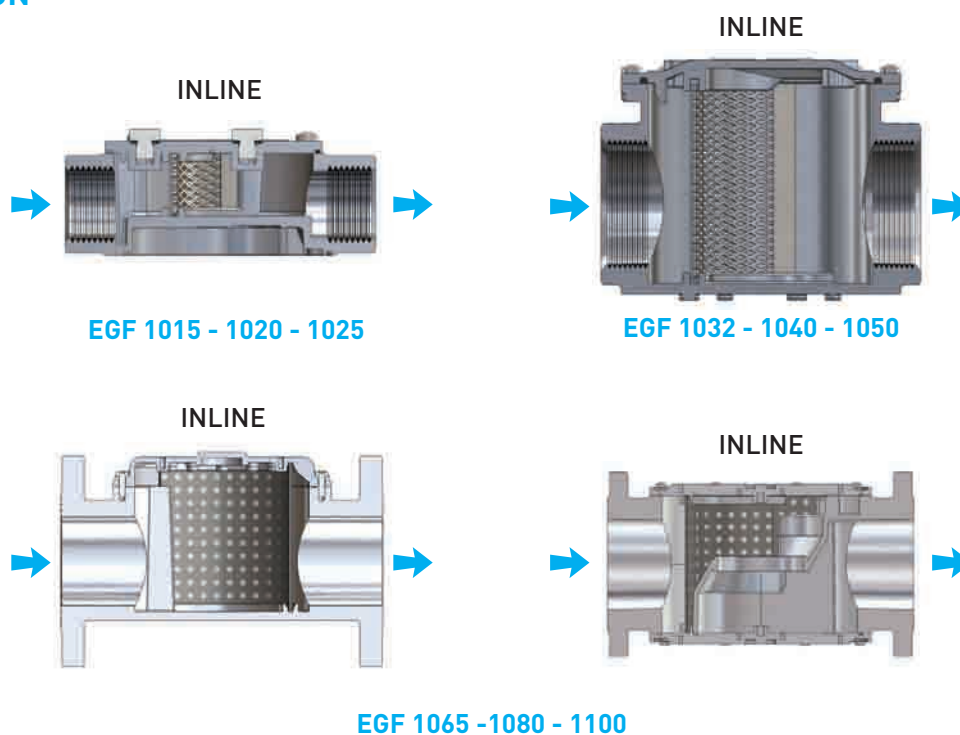


EGF SERIES CAPACITY GRAPH

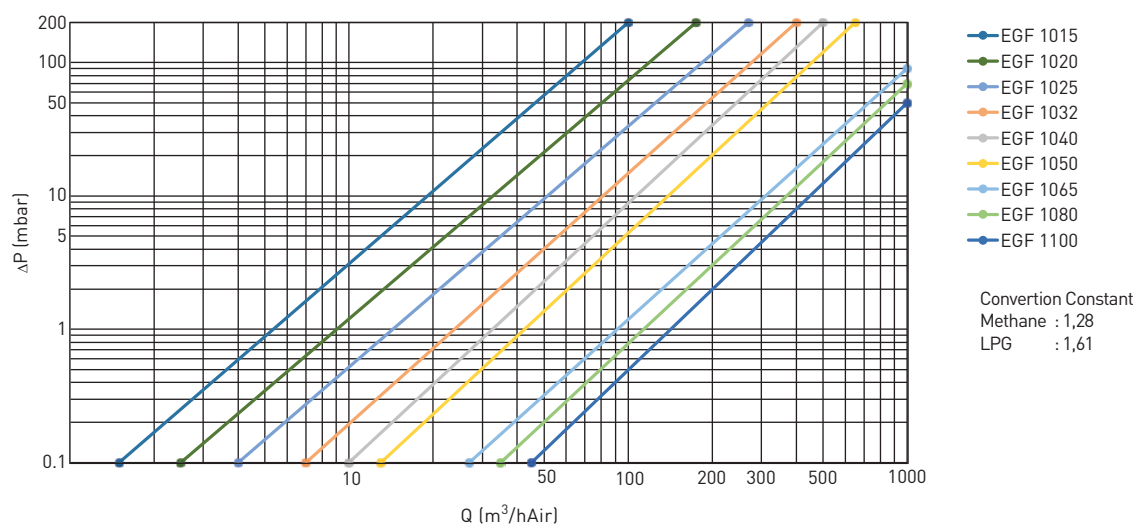

DIMENSIONS




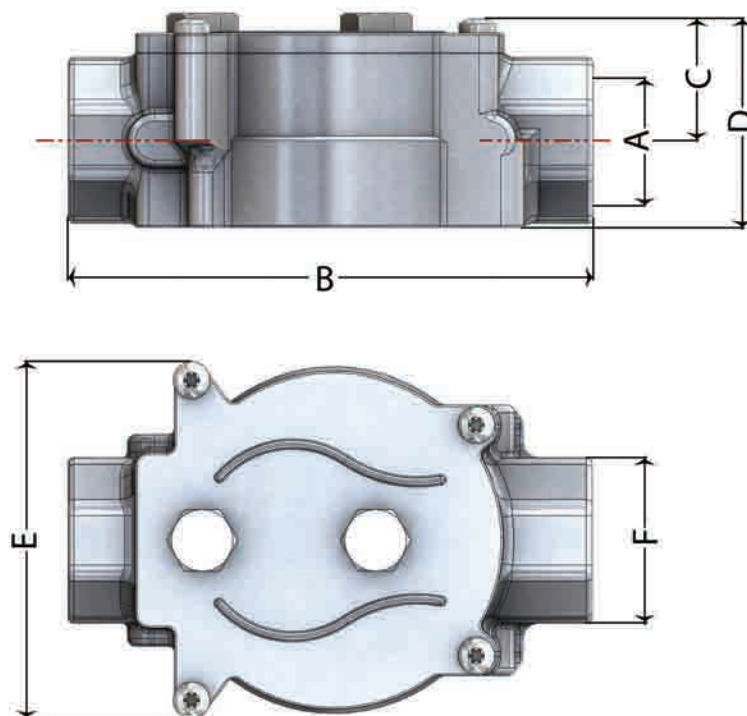


MODEL	DN	A	B	C	D	E	F
EGF 1015	15	1/2"	136	32	54,5	93	AA43
EGF 1020	20	3/4"	136	32	54,5	93	AA43
EGF 1025	25	1"	136	32	54,5	93	AA43

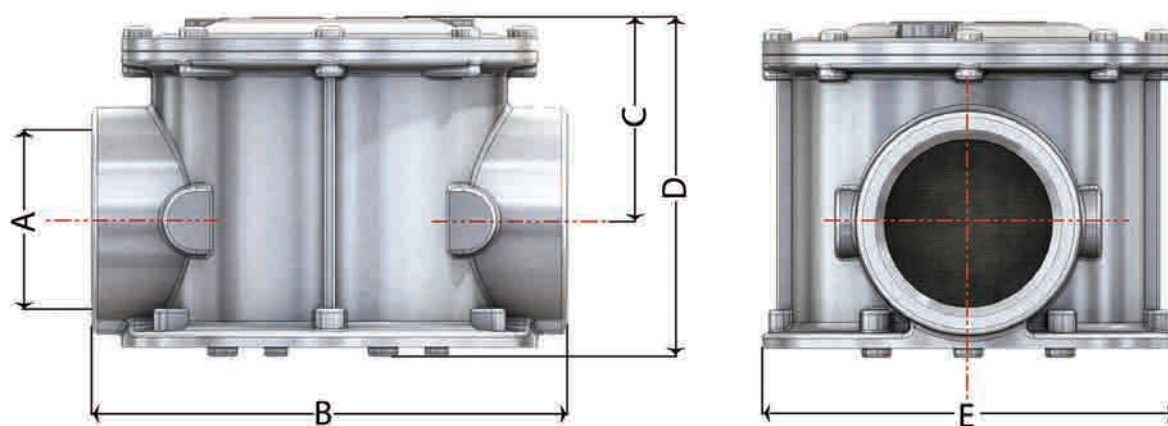

MODEL	DN	A	B	C	D	E
EGF 1032	32	1 1/4"	160	53,5	91	140
EGF 1040	40	1 1/2"	160	53,5	91	140
EGF 1050	50	2"	160	68,5	114	140

DIMENSIONS

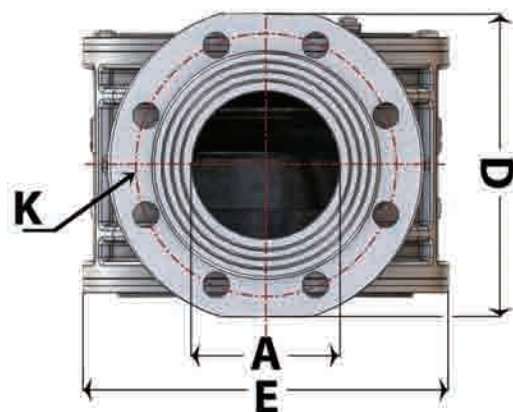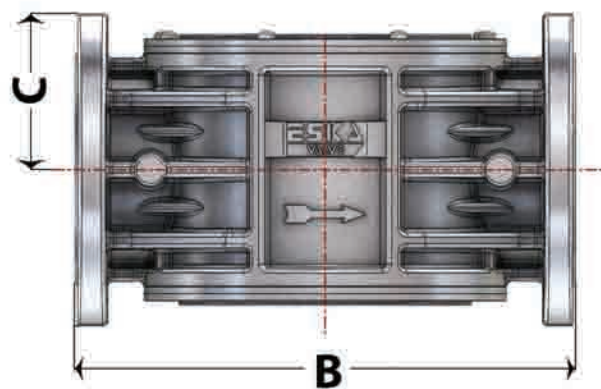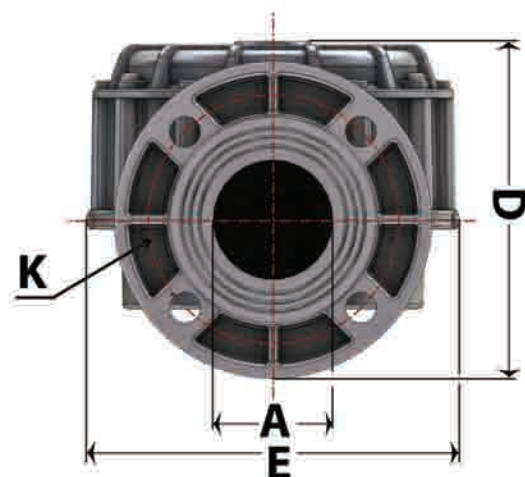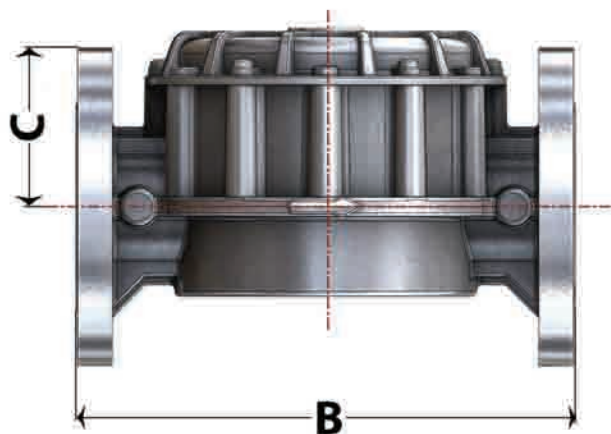

MODEL	DN	A	B	C	D	E	K	Numbers of holes
EGF 1065	65	70	290	93	195	218	145	4
EGF 1080	80	85	310	104	204	218	160	8
EGF 1100	100	100	355	108	211	254	180	8

ESKA

www.eskavalve.com



EGF-H
SERIES


INTRODUCTORY AND TECHNICAL INFORMATION

EGF-H model gas filters are the elements that separates the dust particles carried by the gas or very small particles spread within the gas (for example: dust and rust), holds these and protects the burner, gas counter and adjustment devices which may possibly be damaged. Dust, woodchips, smut and other physical substances and dirt in the gas are held by the fiber. When the dust tank capacity is exceeded or a very high pressure difference effected, the filter loses its filter protection function. The filters are resistant against the mechanical and thermal stress that occur under operational conditions. The device must be kept away from rain and water as much as possible.

- | | | | |
|---------------------------|---|-----------------------------|--|
| • Usage | : City gas networks and gas pipelines in industrial areas | • Filter | : Pore dimensions as standard 50 micron (5-10-20 microns on request) |
| • Fluid Type | : Non-corrosive gases such as Natural Gas (Methane), LPG, Town Gas, Air, etc... | • Ambient Temperature Range | : -20°C up to 60°C |
| • Pressure Class | : PN6 | • Pressure Test Connection | : 1/4" Threaded (Female) |
| • Connection or Port Size | : 1/2", 3/4", 1", 1 1/4", 1 1/2", 2" Threaded (Female) | • Material Standard | : Aluminum EN 1706, Rubbers EN 549 |




EGF-H 1015 - 1020 - 1025

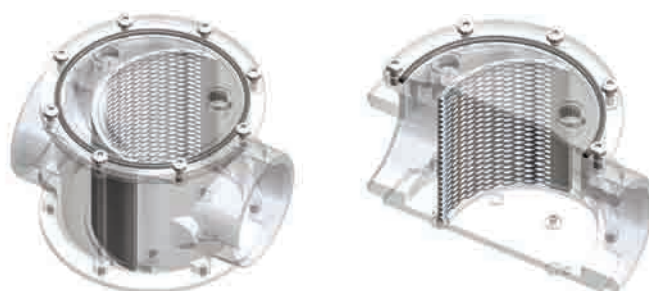


EGF-H 1032 - 1040 - 1050


EGF-H SERIES CAPACITY GRAPH

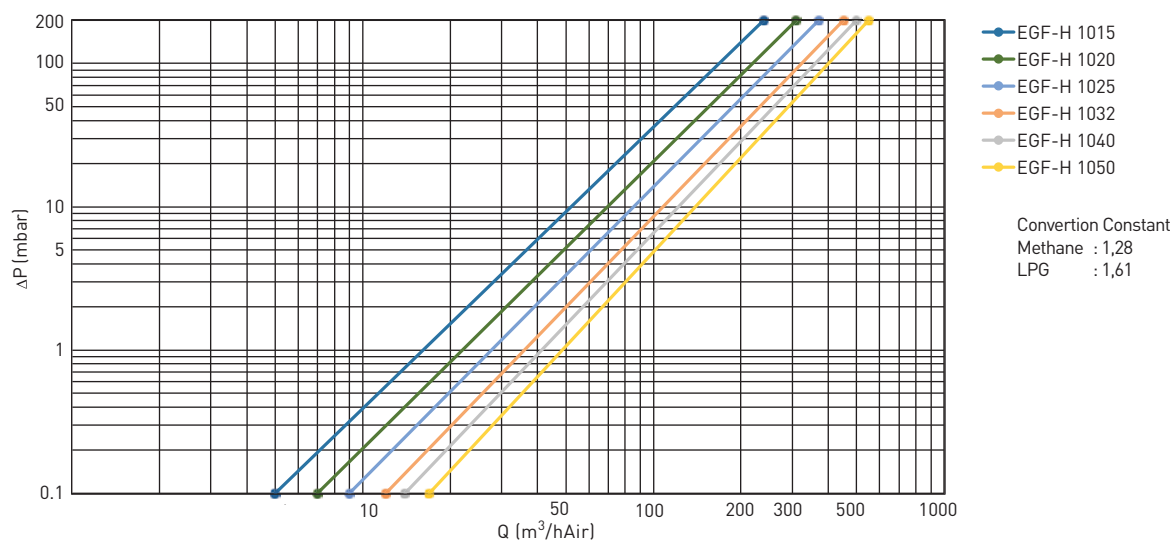


CONFIGURATIONS

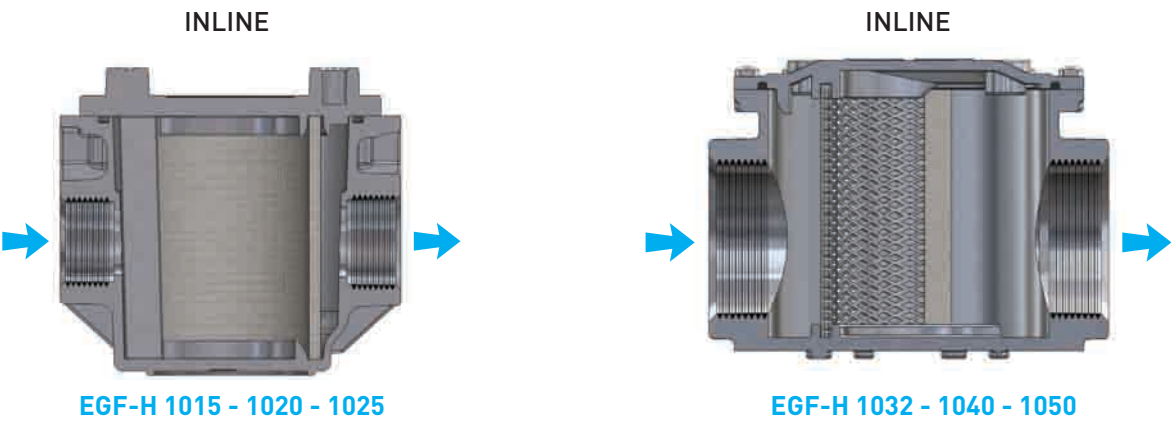

DIMENSIONS

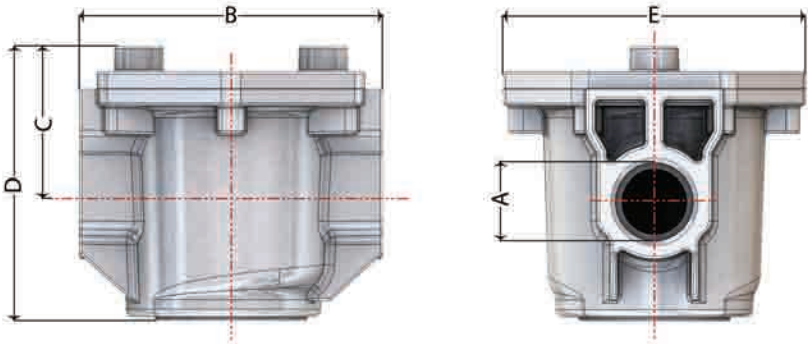

MODEL	DN	A	B	C	D	E
EGF-H 1015	15	1/2"	120	61,5	108,5	120
EGF-H 1020	20	3/4"	120	61,5	108,5	120
EGF-H 1025	25	1"	120	61,5	108,5	120

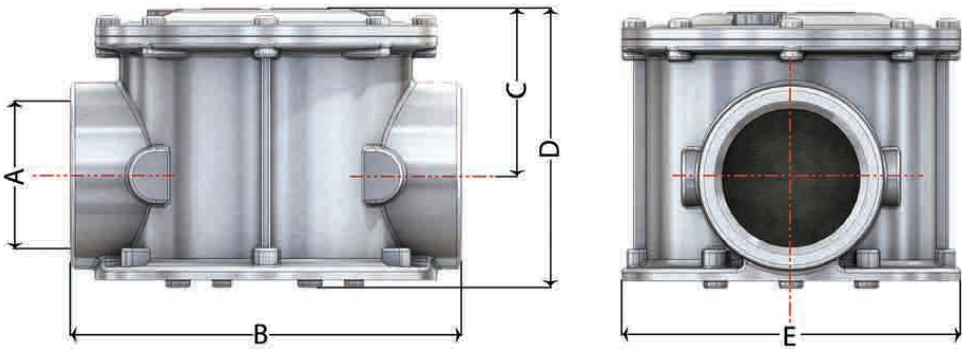

MODEL	DN	A	B	C	D	E
EGF-H 1032	32	1 1/4"	160	53,5	91	140
EGF-H 1040	40	1 1/2"	160	53,5	91	140
EGF-H 1050	50	2"	160	68,5	114	140



MECHANICAL ACTUATED

SEISMIC VALVE SERIES

ESKA

www.eskavalve.com



EMV
SERIES

MECHANICAL ACTUATED SEISMIC VALVE

EMV Series Earthquake Valve is a shut off valve which is activated during seismic oscillation. Activation and non-activation waves are defined in TS 12884 Turkish Standard. This Turkish standard is created based on ANSI Z11 standard in United States. Once mechanical actuation system sense the seismic oscillation, valve will shut the gas off and you should rearm manually in order to reactivated gas flow. This valve basically is a manual reset, normally open gas valve. Main aim to decrease the risk of fire related to gas leakage, in case of earthquake occurs. In countries that this safety system is available, main regulation is done by fire safety department.

TECHNICAL INFORMATION


- | | | | |
|----------------------------|---|-----------------------------|---|
| • Usage | : City gas networks and gas pipelines in industrial areas | • Maximum Working Pressure | : 0,5 bar |
| • Medium | : Non-corrosive gases such as Natural Gas (Methane), LPG, Town Gas, Air, etc... | • Ambient Temperature Range | : -23°C up to 51,5°C |
| • Montage Position | : Vertical | • Reset | : Manually |
| • Position | : Normally Open | • Material Standard | : Aluminum-EN 1706 / Brass-EN12164 and EN12165 / Rubber-EN549 |
| • Connection or Port Size: | 1", 1 1/4", 1 1/2", 2" Threaded (Female) DN65, DN80, DN100 Flanged | | |



EMV 1025







EMV 1032 - 1040 - 1050

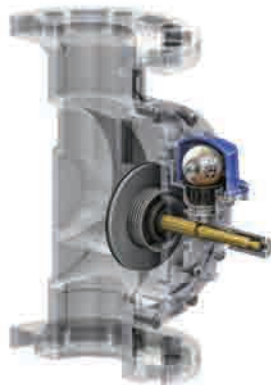


EMV 1065 - 1080 - 1100



CONFIGURATION

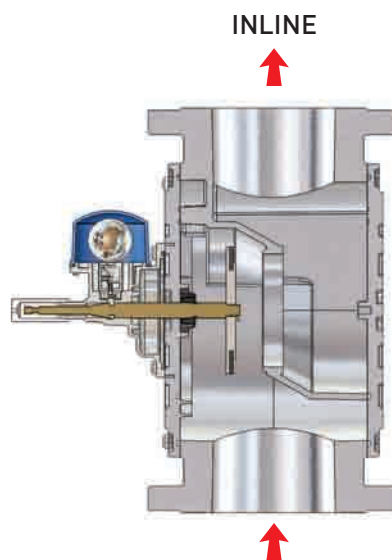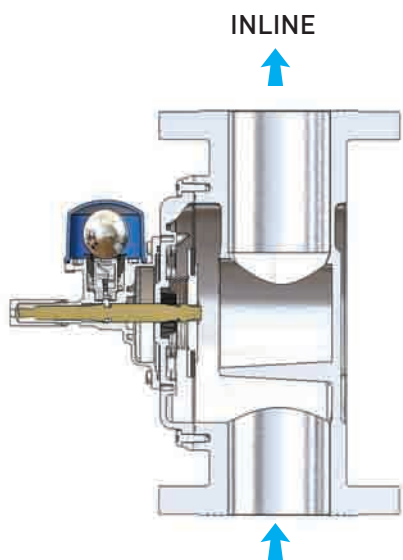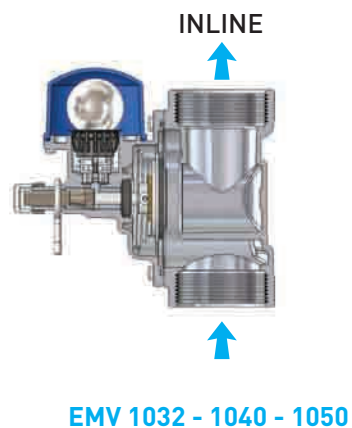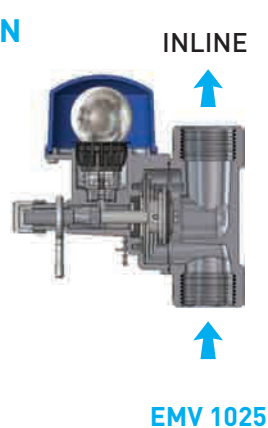



EMV SERIES CAPACITY GRAPH

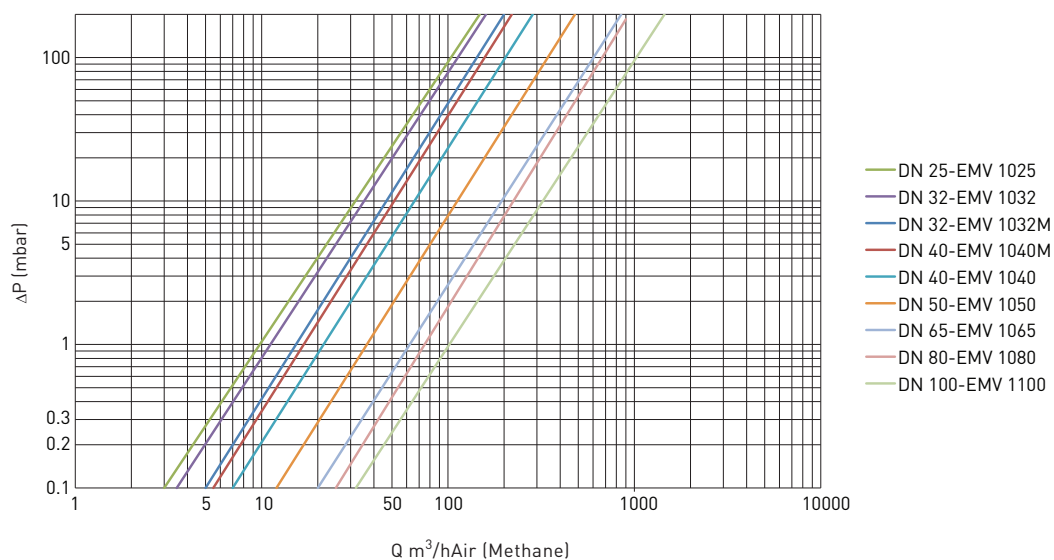





DIMENSIONS

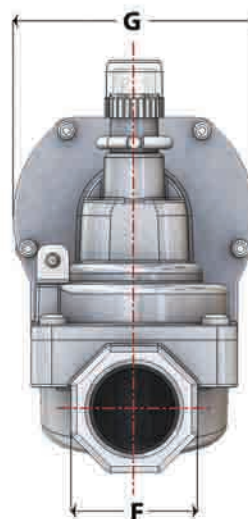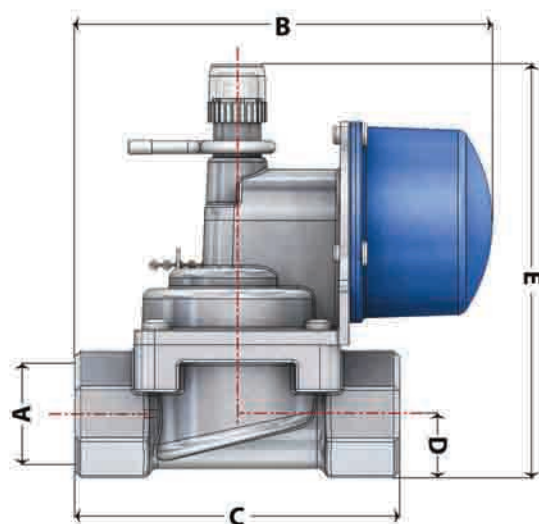

MODEL	DN	A	B	C	D	E	F	G
EMV 1025	25	1"	141	110	21,5	140	AA 43	82

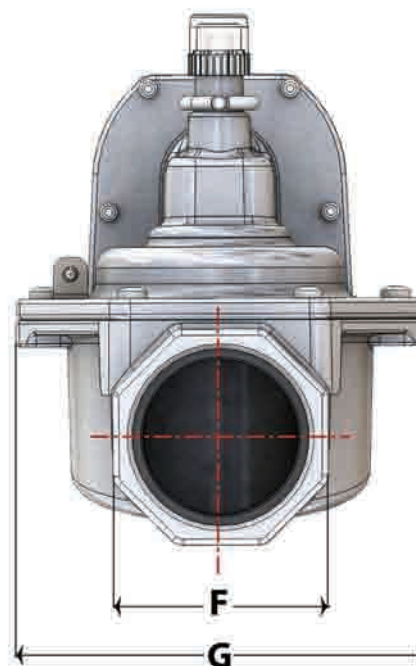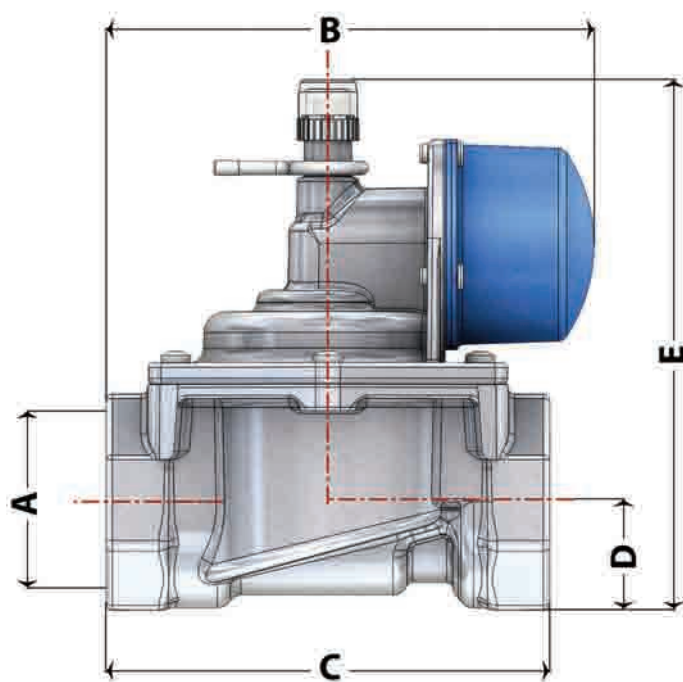

MODEL	DN	A	B	C	D	E	F	G
EMV 1032	32	1 1/4"	141	110	30	160	AA 60	133
EMV 1040	40	1 1/2"	158	144	30	165	AA 60	133
EMV 1050	50	2"	158	144	35	172	AA 70	133

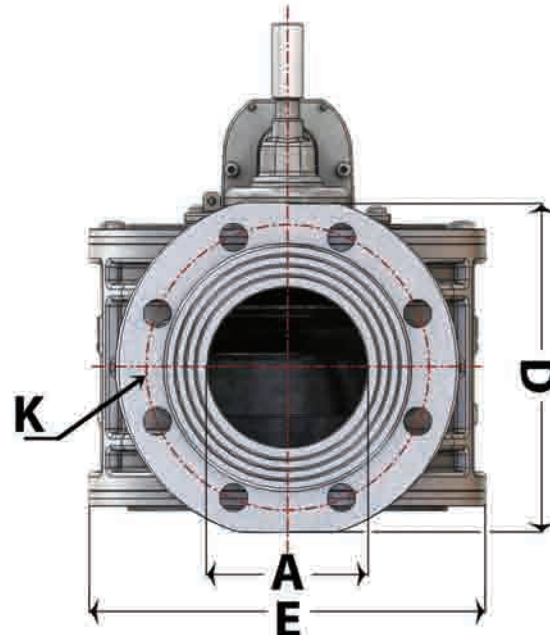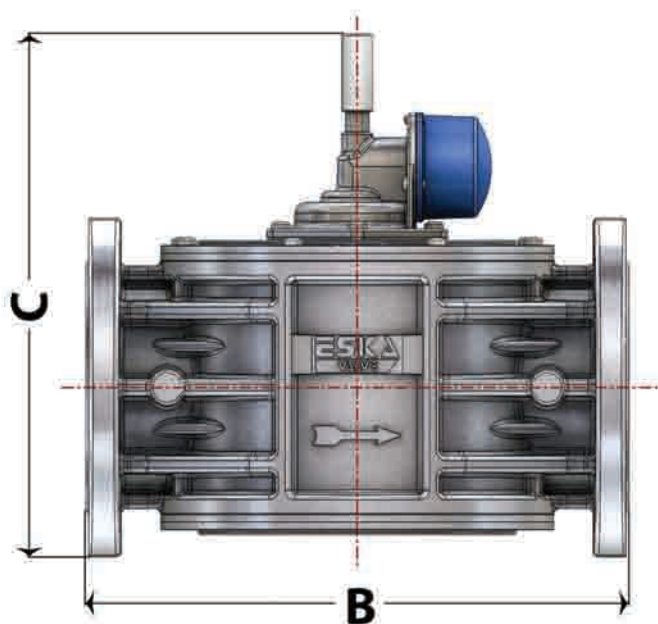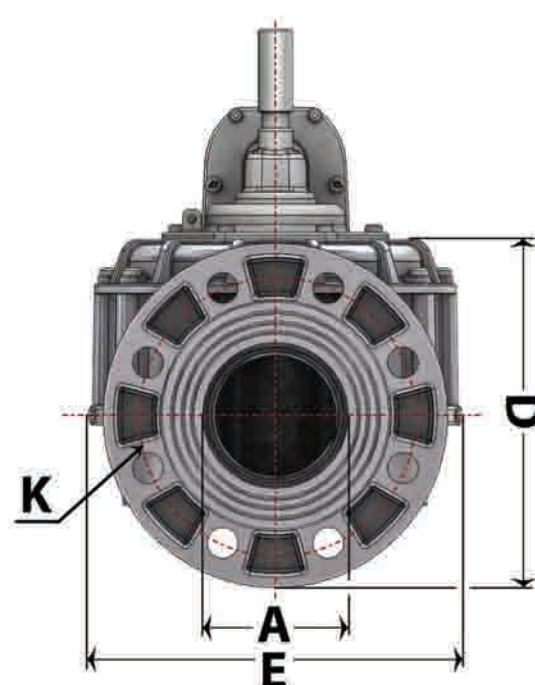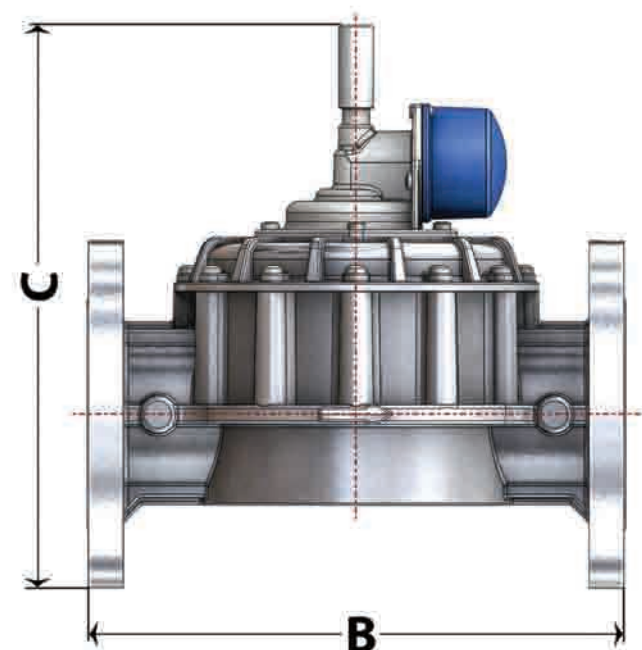DIMENSIONS


MODEL	DN	A	B	C	D	E	K	Number of holes
EMV 1065	65	70	290	316	185	216	145	4
EMV 1080	80	85	310	324	203	216	160	8
EMV 1100	100	100	350	325	211	254	180	8



MANUAL RESET VALVE SERIES

ESKA


www.eskavalve.com




EGV
SERIES

INTRODUCTORY

These are the manually adjusted gas valves used with the safety purposes in the gas lines to automatically stop the gas flow by the effect of the signals given by the third party equipments such as gas alarm detectors, ventilation equipments etc.

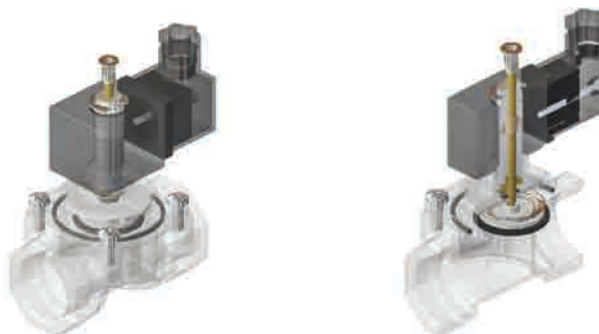

EGV 1015 - 1020 - 1025

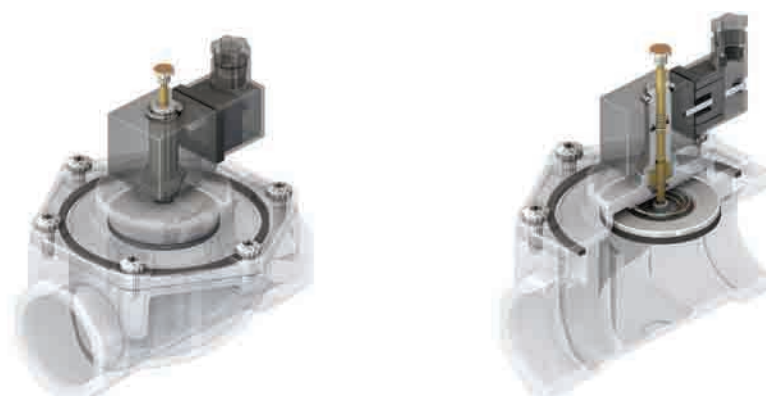

EGV 1032 - 1040 - 1050




EGV 1065 - 1080 - 1100


TECHNICAL INFORMATION

- Usage : City gas networks and gas pipelines in industrial areas
- Medium : Natural Gas (Methane), LPG, Town Gas, Air, etc...
- Position : Normally Open
- Connection or Port Size : 1/2", 3/4, 1", 1 1/4", 1 1/2", 2" Threaded (Female), DN65, DN80 DN100 Flanged
- Maximum Working Pressure : 0,5 bar
- Working Voltage Range : 12V, 220V AC or DC (On request other voltages)
- Ambient Temperature Range : -20°C up to 60°C
- Protection Class : IP54
- Voltage Tolerance : $\pm 10\%$
- Response Time : Less than 1 second
- Reset : Manually
- Material Standard : Aluminum-EN 1706 / Rubber-EN 549


PRESSURE DROP GRAPH

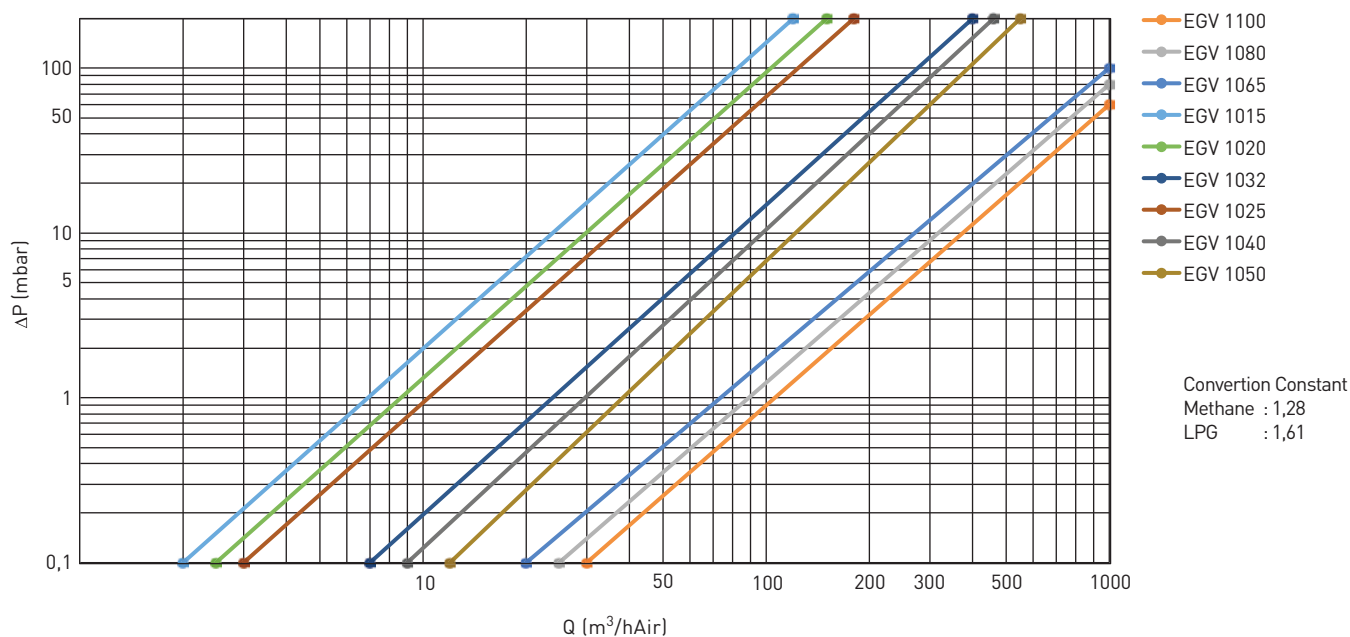

DIMENSIONS




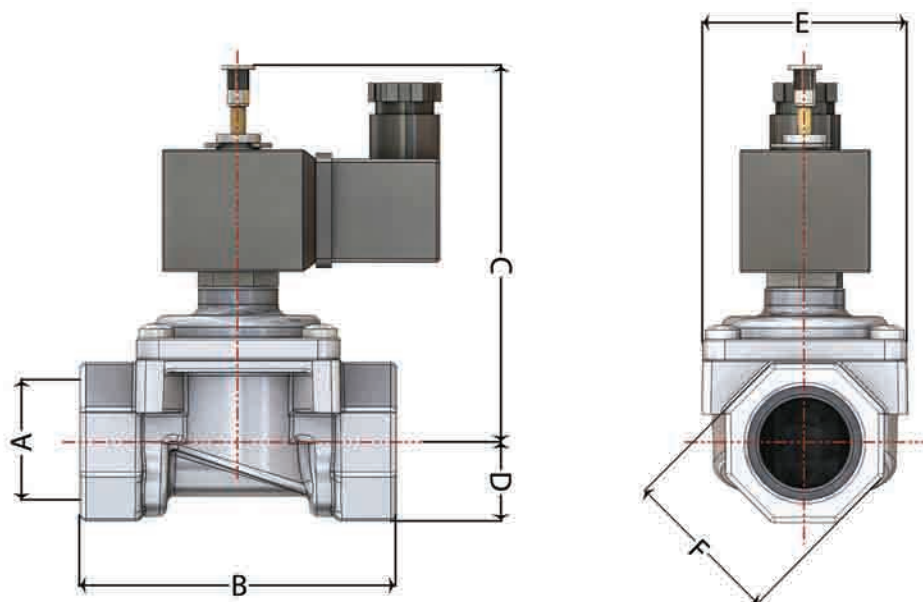


MODEL	DN	A	B	C	D	E	F
EGV 1015	15	1/2"	85,5	102	21,5	55	AA 43
EGV 1020	20	3/4"	85,5	102	21,5	55	AA 43
EGV 1025	25	1"	85,5	102	21,5	55	AA 43

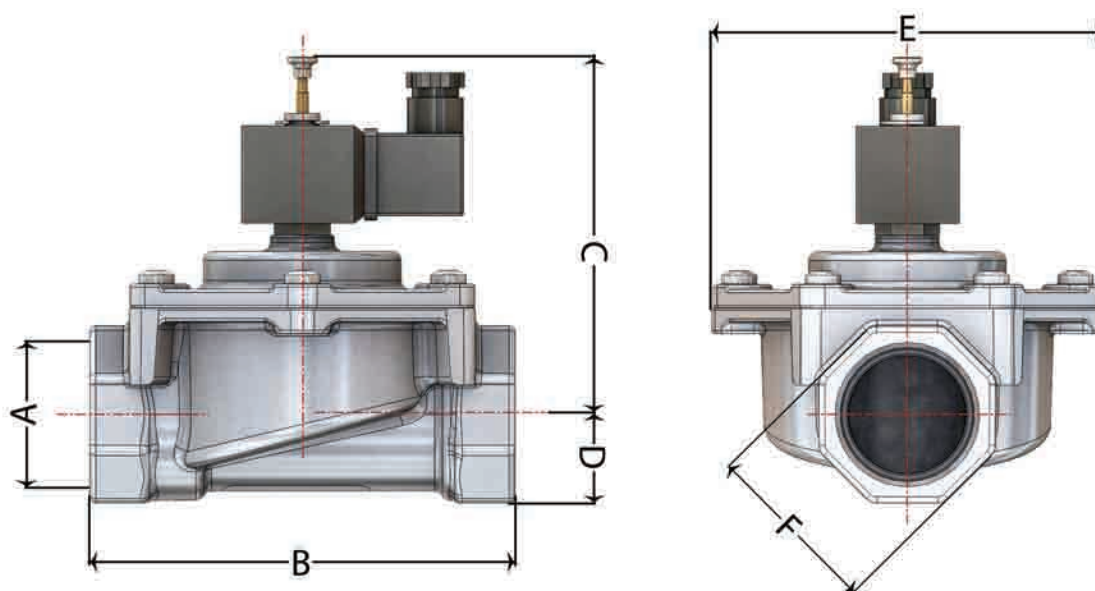

MODEL	DN	A	B	C	D	E	F
EGV 1032	32	1 1/4"	110	112	30	72	AA 60
EGV 1040	40	1 1/2"	144	125	30	133	AA 60
EGV 1050	50	2"	144	123	35	133	AA 70

DIMENSIONS

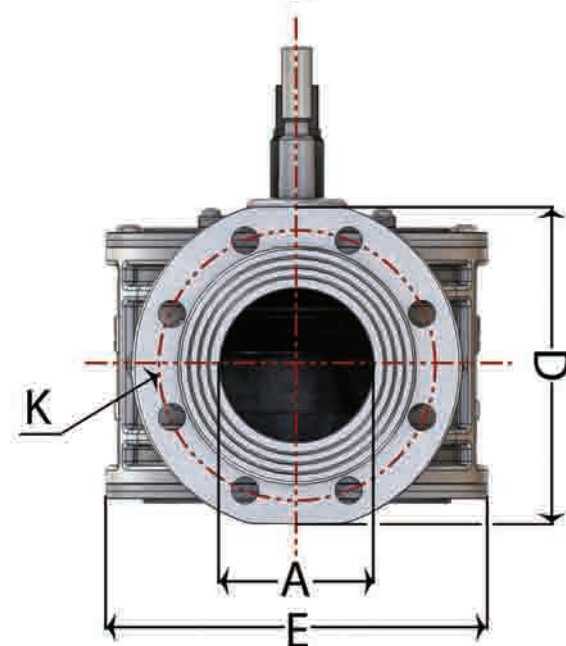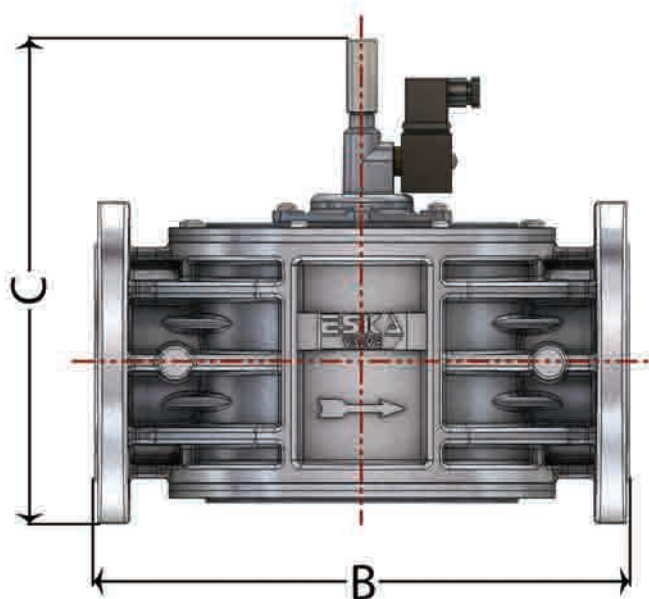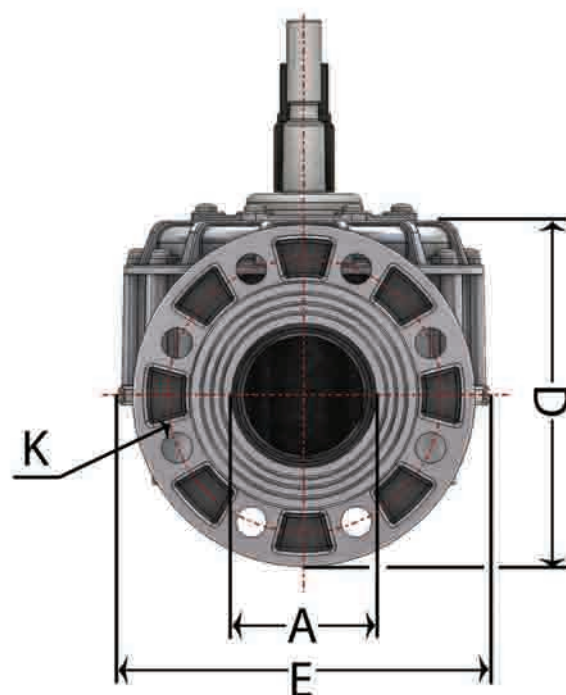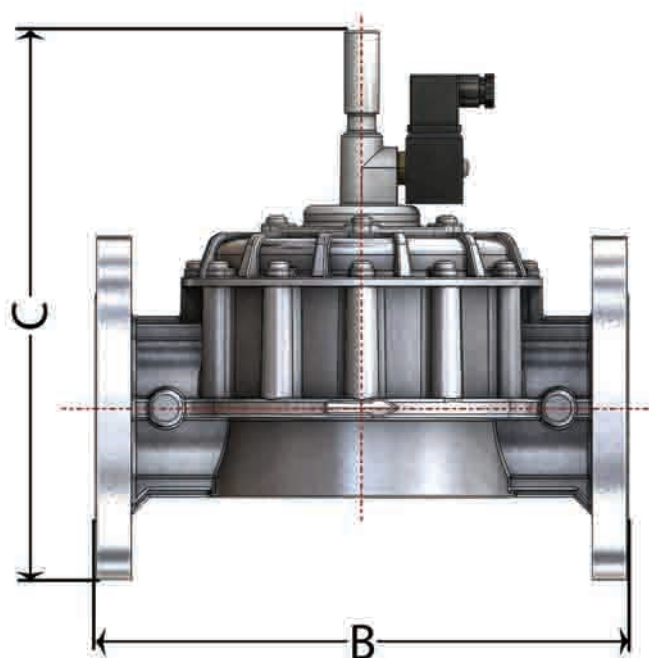

MODEL	DN	A	B	C	D	E	K	Number of holes
EGV 1065	65	70	290	312	185	216	145	4
EGV 1080	80	85	310	320	203	216	160	8
EGV 1100	100	100	352	317	211	254	180	8

ESKA

www.eskavalve.com



E A C SERIES

INTRODUCTORY AND TECHNICAL INFORMATION

EAC model gas alarm device is an A type device, which complies with the EN 50194-1 standard, designed to be used at homes, offices and similar places to detect the explosive gases (natural gas and LPG). It is an electrical alarm device constantly working, set on a stable place and which creates an output signal that activates the stopper and/or auxiliary device with a visual and audial warning. It works with 230V AC 50/60 Hz network voltage. It makes the devices like horn, siren, gas stopping valve in case of an alarm thanks to its output contact.

The limit of the concentration level of the gases in the environment at which explosion or sparking is called Lower Explosion Limit (LEL). the LEL level of the natural gas is 5% and the LEL of the LPG is 2%; the gas alarm device starts audial and lightened (visual) warning before the gas leak reaches one-fifth of this value. Visual and audible alarm is received between the 3% LEL volume rate and 20% LEL volume rate of the gas.

The alarm adjustment level of the device for natural gas is %0,5 (five in a thousand) or 5.000 ppm (five thousand in a million) (5%).

The alarm adjustment level of the device for LPG is % 0,2 (two in a thousand) or 2.000 ppm (two thousand in a million) (5%). The device can't detect the gases with hazardous effects such as carbon monoxide.


The visual and audible alarms of the gas detection device works within 30 seconds at most after the device is exposed to the gas volume it needs to detect..

The operation and feeding voltage of the product is 230VAC. The product can perform all its functions with 10% of the operation voltage.

The device must be kept away from the rain and water.

- | | | | |
|------------------------------------|---|--------------------------------|---|
| • Usage | : Home, Office etc. | • Response Time | : 30 seconds |
| • Detects Gases | : Methane (natural gas), LPG
(liquefied petroleum gas) | • Sound Intensity | : 85Db |
| • Device Type | : Type A (visual alarm, audible
alarm and output signal) | • Body Material | : ABS |
| • Operating Voltage | : 230V AC 50-60 Hz ; \pm %10 | • Ambient
Temperature Range | : -10°C up to 50°C |
| • Power Consumption | : 3VA | • Operating Humidity | : 10% – 90% |
| • Protection Class | : IPX2D | • Visual Warning | : Green-System Enabled Error
Yellow, Red-Alarm |
| • Output Signal
(relay contact) | : 230V AC / 7A (normally open) | • According to
Directives | : 2006/95/EC, 89/336/EC |
| • Sensor Type | : Semiconductor | • According to
Standards | : EN 50194-1, EN 50270,
EN 60335-1 |
| • Calibration Time | : 1 minute | | |

DIMENSIONS

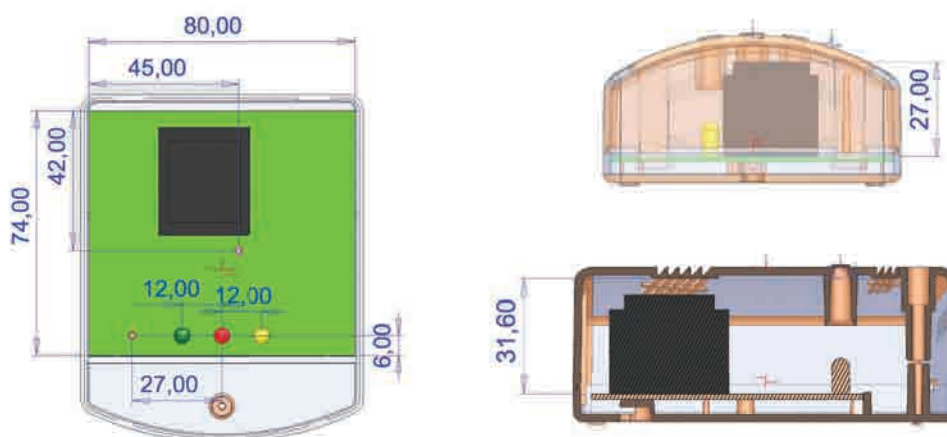




C A B I N E T
S O L U T I O N S


S300 Wall Type Cabinets

Usage : Gas networks, industrial and domestic users
Dimensions : 210 x 535 x 1122
Flow Range: up to 500 m³/h
Regulator : ERG-H5 (link)
Inlet Pressure Range: up to 6 bar
Outlet pressure Range: 15 mbar to 2,5 bar
Inlet Connection: CAL25 (suitable for PE connection)
Outlet Connection: 2"
Security Options: OPS0-UPS0
Set Includes : B12 filter , gas pressure regulator,
inlet and outlet manometer,
S300 NonFlammable composite cabinet,
cal 25 valve, inlet and outlet relief valves, 2"outlet pipe

DIMENSIONS

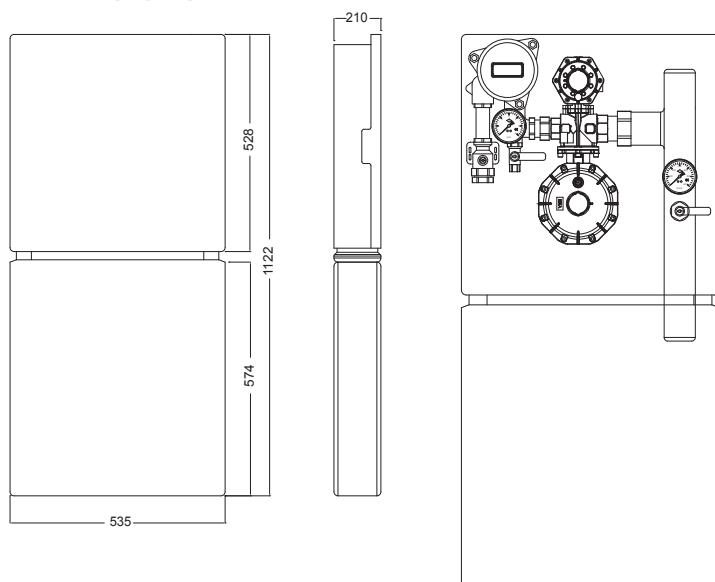

LEGEND

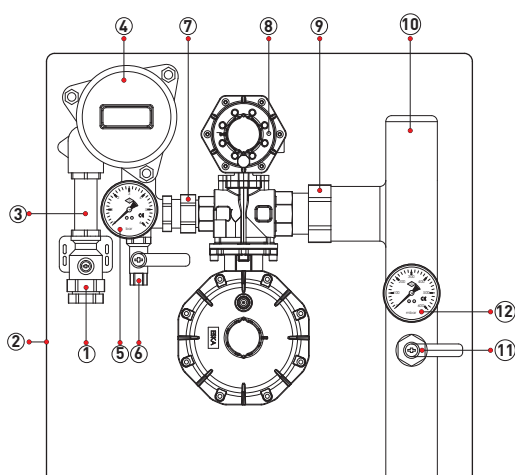

S300 CABINET SET			
No	Name	Description	Pcs
1	Inlet Valve	PN5, CAL25	1
2	S300 Cabinet	Standard	1
3	B12 Extension Nipple	Brass	1
4	B12 Cartridge Filter	Aluminum Alloy , Thread, PN6 90 degree	1
5	Inlet Manometer	1/4" Threaded, 63 Diameter, 0-6 bar, KL 2,5	1
6	Inlet Ball Valve	1/4", Threaded, with Blind Tap , EN331	1
7	Regulator Inlet Fitting	Brass	1
8	Gas Pressure Regulator	ERG-H5 , 1" x 1 1/2" Threaded, Q: 200m ³ /h, Pd: 300 mbar with Security Shut-Off	1
9	Regulator Outlet Fitting	Carbon Steel	1
10	Outlet Pipe	2", Zinc Coated	1
11	Outlet Manometer	1/4", Threaded, 63 Diameter, 0-600 mbar, KL 1,6	1
12	Outlet Ball Valve	1/4", Threaded, with Blind Tap, EN331	1

S2300 Wall Type Cabinets

Usage : Gas networks, industrial and domestic users

Dimensions : 380 x 215 x 500

Flow Range: 2,5-250 m³/h

Regulator : ERG-S, ERG-SE, ERG-SR, ERG-H1 (link)

Inlet Pressure Range: 0,5-6 bar (for 21mbar outlet pressure), 1,5-6 bar (for 500mbar outlet pressure)



Outlet pressure Range: 18 mbar to 4 bar

Inlet Connection: CAL15 or CAL25
(suitable for PE connection)





Outlet Connection: Suitable NG plexsy for meter

Security Options: OPS0-UPS0

Set Includes : gas pressure regulator,
S2300 NonFlammable composite cabinet,
CAL15/CAL 25 valve

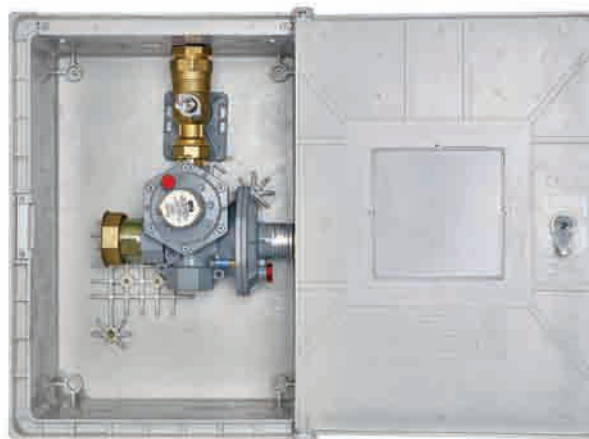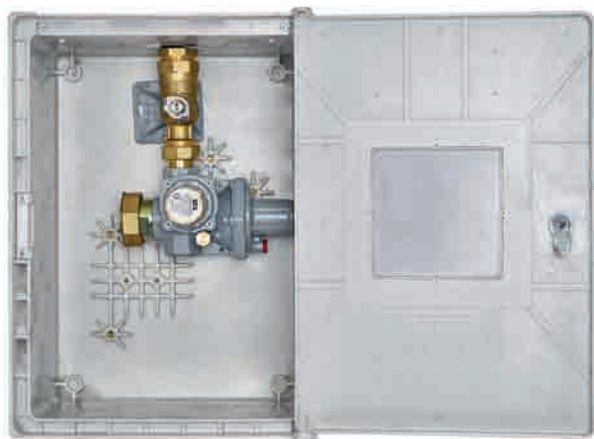

DIMENSIONS

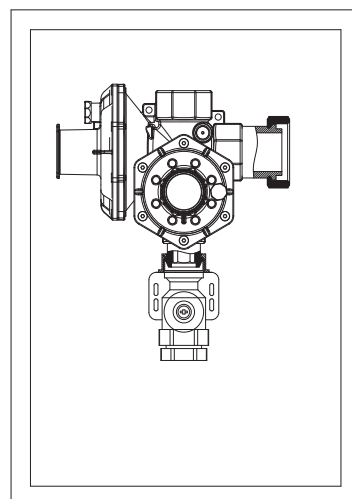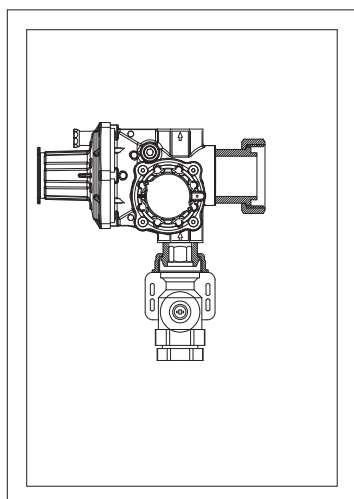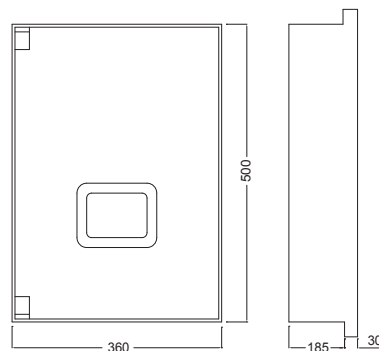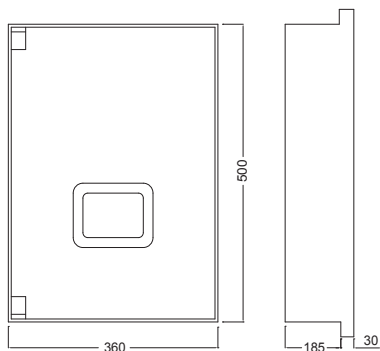

CES200 Underground Type Cabinets

Usage : Gas networks, industrial and domestic users

Dimensions : 330 x 520 x 249

Flow Range : 2,5-60 m³/h

Regulator : ERG-S, ERG-SE

inlet pressure range: 0,5-4 bar (for 21mbar outlet pressure),

1,5-6 bar (for 500mbar outlet pressure)



Outlet Pressure Range : 21-500 mbar

Inlet Connection : CAL15 (suitable for PE connection)







Outlet Connection : 11/4"

Security Options : OPS0-UPS0

Set includes : gas pressure regulator,
CES200 Non Flammable composite cabinet,
CAL15 valve

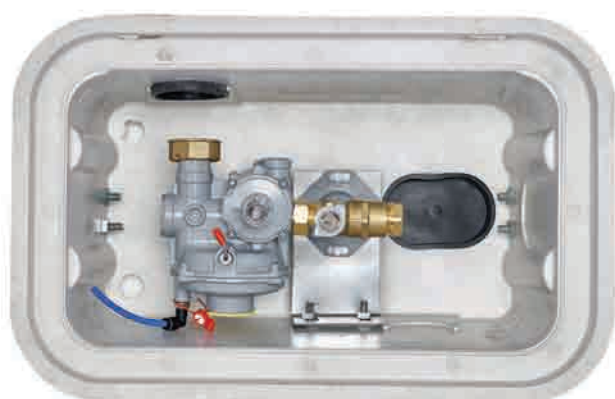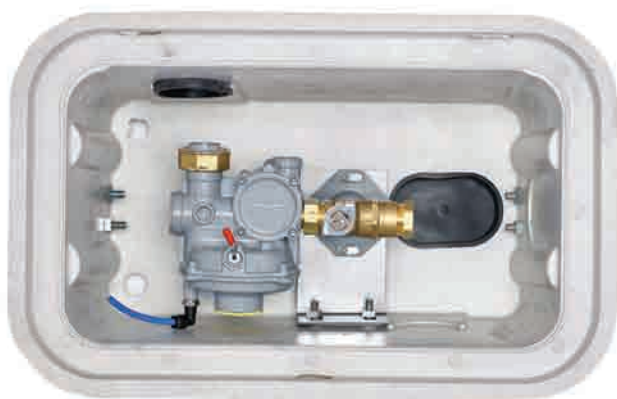

DIMENSIONS

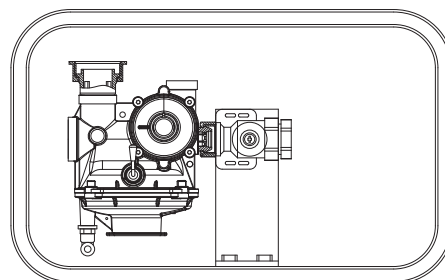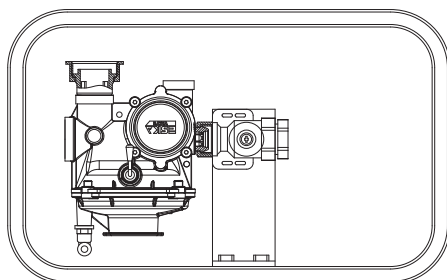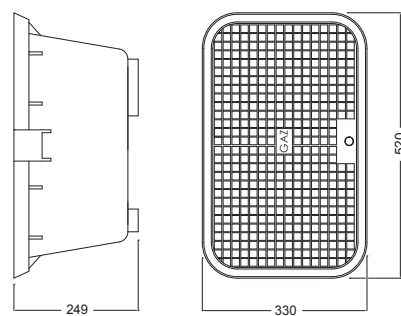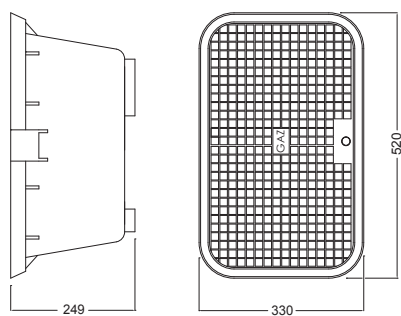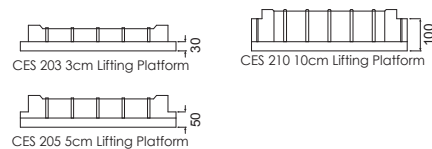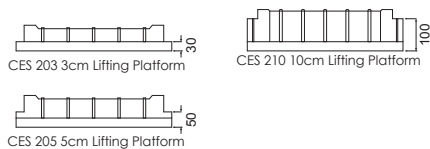

S700 Wall Type Cabinets

Usage : Gas networks, industrial and domestic users

Dimensions : 305 x 155-230 x 660

Flow Range : 2,5-250 m³/h

Regulator : ERG-S, ERG-SE, ERG-SR, ERG-H1

Inlet Pressure Range : 0,5-4 bar (for 21mbar outlet pressure),
1,5-6 bar (for 300mbar outlet pressure)

Outlet Pressure Range : 21 mbar, to 4 bar

Inlet Connection : CAL15 or CAL25
(suitable for PE connection)









Outlet Connection : 1 1/4" or 2"

Security Options : OPS0-UPS0

Set includes : Gas pressure regulator,
S700 NonFlammable composite cabinet,
CAL15/cal 25 valve)



DIMENSIONS

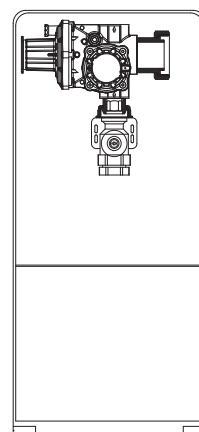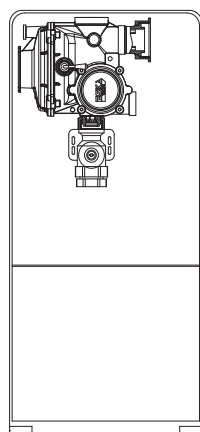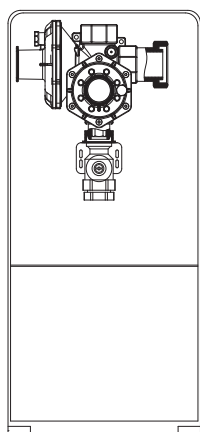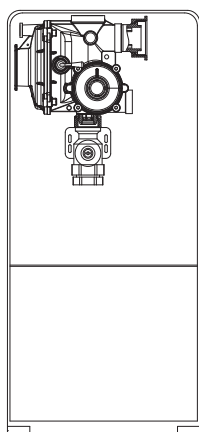

S2200 Underground Type Cabinets

Usage : Gas networks, industrial and domestic users

Dimensions : 244 x 330 x 173

Flow Range : 2,5-60 m³/h

Regulator : ERG-S, ERG-SE

inlet pressure range: 0,5-4 bar (for 21mbar outlet pressure),
1,5-6 bar (for 300mbar outlet pressure)



Outlet Pressure Range : 21-500 mbar

Inlet Connection : CAL15 (suitable for PE connection)





Outlet Connection : 11/4"

Security Options : OPS0-UPS0

Set Includes : gas pressure regulator,
S2200 NonFlammable composite cabinet, CAL15 valve

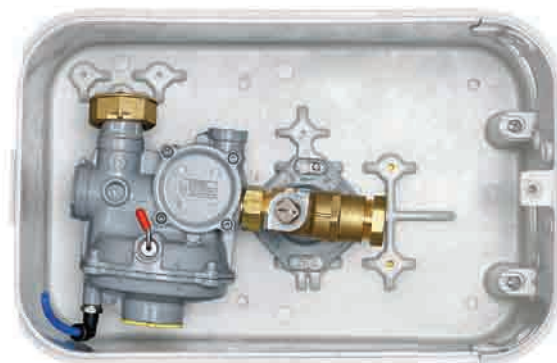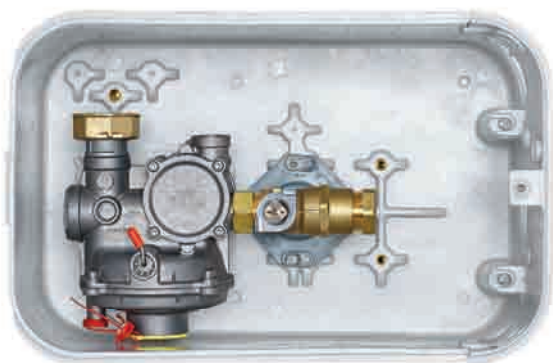

DIMENSIONS

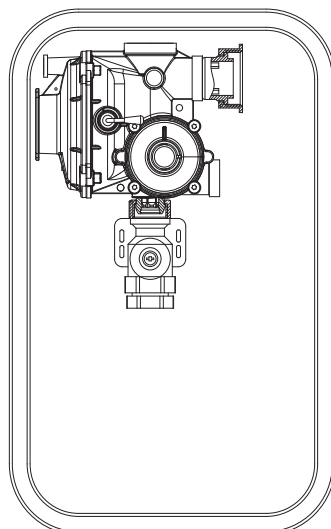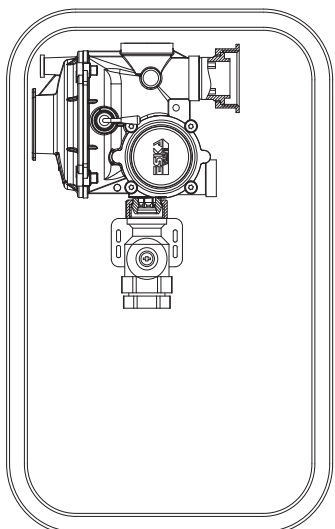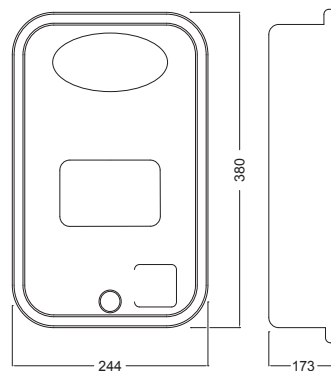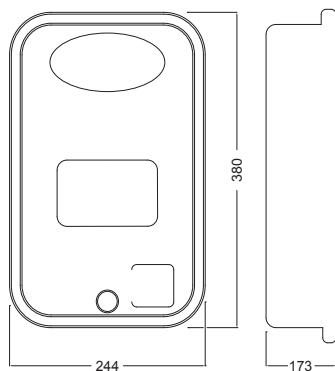



ESKA VALVE A.Ş.

Sakarya 1. Organize Sanayi Böl. **T.**+90 (264) 502 54 34-35 info@eskavalve.com
11. Cad. No: 6-8 Arifiye / Sakarya **F.**+90 (264) 502 54 84 www.eskavalve.com

